






Cable entry system type KDL/E+

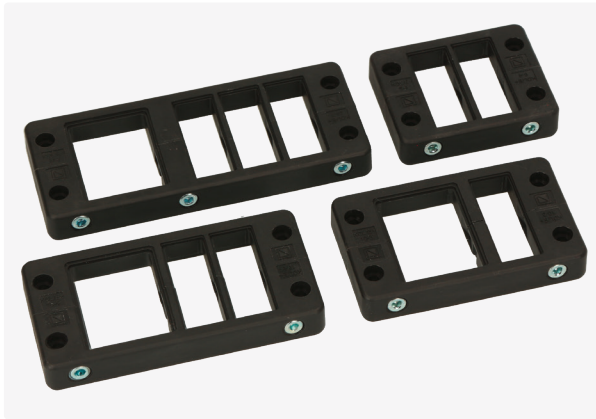

Product information

The flexible cable entry system for the insertion of pre-assembled cables with a frame closed at the top.

- Stackable
- Easy assembly
- High packing density
- Integrated strain relief
- Protection class: IP 65
- Thermal stability: -40 °C – +100 °C
- Fire classification: V0
- RoHS Compliant
- UV-resistant
- Made in Germany

Matching grommet: KDT/ZE and KDT/ZE+

Information, conformities and approvals



Article	Order No.	Color	No. of openings small/ large	for Ø mm	Dimension table	Cut-out	PU pcs.
For standard cut-out size 6							
KDL/E+ 6/1, sw	87121156	Black	0 / 1	16 - 32	DIM_A	6-pole	1
KDL/E+ 6/4, sw	87121154	Black	4 / 0	3 - 16	DIM_A	6-pole	1
For standard cut-out size 10							
KDL/E+ 10/3, sw	87121152	Black	2 / 1	3 - 32	DIM_A	10-pole	1
KDL/E+ 10/6, sw	87121150	Black	6 / 0	3 - 16	DIM_A	10-pole	1
For standard cut-out size 16							
KDL/E+ 16/2, sw	87121164	Black	0 / 2	16 - 32	DIM_A	16-pole	1
KDL/E+ 16/5, sw	87121162	Black	4 / 1	3 - 32	DIM_A	16-pole	1
KDL/E+ 16/8, sw	87121160	Black	8 / 0	3 - 16	DIM_A	16-pole	1
For standard cut-out size 24							
KDL/E+ 24/4	87121110	Black	2 / 2	3 - 32	DIM_A	24-pole	1





Cable entry system type KDL/E+

Article	Order No.	Color	No. of openings small/ large	for Ø mm	Dimension table	Cut-out	PU pcs.
KDL/E+ 24/7	87121120	Black	6 / 1	3 - 32	DIM_A	24-pole	1
KDL/E+ 24/10	87121130	Black	10 / 0	3 - 16	DIM_A	24-pole	1
For standard width size 24, stacked							
KDL/E+ 24/8	87121112	Black	4 / 4	3 - 32	DIM_D		1
KDL/E+ 24/12	87121114	Black	6 / 6	3 - 32	DIM_E		1
KDL/E+ 24/14	87121122	Black	12 / 2	3 - 32	DIM_D		1
KDL/E+ 24/21	87121124	Black	18 / 3	3 - 32	DIM_E		1
KDL/E+ 24/20	87121132	Black	20 / 0	3 - 16	DIM_D		1
KDL/E+ 24/30	87121134	Black	30 / 0	3 - 16	DIM_E		1
KDL/E+ 24/11	87121140	Black	8 / 3	3 - 32	DIM_D		1
KDL/E+ 24/17	87121142	Black	16 / 1	3 - 32	DIM_D		1



Cable entry system type KDL/E+



KDL/E cable entry system

Article	Order No.	A mm	B mm	C mm	a mm	b mm	c mm	d mm	e mm
For standard cut-out size 6									
KDL/E+ 6/1, sw	87121156	74	60	15	46	36	29	16	5.5
KDL/E+ 6/4, sw	87121154	74	60	15	46	36	29	16	5.5
For standard cut-out size 10									
KDL/E+ 10/3, sw	87121152	99	60	15	65	36	41.5	16	5.5
KDL/E+ 10/6, sw	87121150	99	60	15	65	36	41.5	16	5.5
For standard cut-out size 16									
KDL/E+ 16/2, sw	87121164	119	60	15	86	36	51.5	16	5.5
KDL/E+ 16/5, sw	87121162	119	60	15	86	36	51.5	16	5.5
KDL/E+ 16/8, sw	87121160	119	60	15	86	36	51.5	16	5.5
For standard cut-out size 24									
KDL/E+ 24/4	87121110	146	60	15	112	36	65	16	5.5
KDL/E+ 24/7	87121120	146	60	15	112	36	65	16	5.5
KDL/E+ 24/10	87121130	146	60	15	112	36	65	16	5.5
For standard width size 24, stacked									
KDL/E+ 24/8	87121112	146	114	15	112	90	65	43	5.5
KDL/E+ 24/12	87121114	146	168	15	112	144	65	70	5.5
KDL/E+ 24/14	87121122	146	114	15	112	90	65	43	5.5
KDL/E+ 24/21	87121124	146	168	15	112	144	65	70	5.5
KDL/E+ 24/20	87121132	146	114	15	112	90	65	43	5.5
KDL/E+ 24/30	87121134	146	168	15	112	144	65	70	5.5
KDL/E+ 24/11	87121140	146	114	15	112	90	65	43	5.5
KDL/E+ 24/17	87121142	146	114	15	112	90	65	43	5.5



Cable entry system type KDL/E+

Thermal properties



Temperature / temperature range -40 °C – 100 °C

Protection



Protection class IP65

Fire properties



Fire classification acc. to UL94: V0



Fire properties as per EN 45545-2 -

Technical information



LABS free



UV-resistant acc. to ISO 4892-2

Strain relief



Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



EU railway approval



cURus approval



UL type 12



Cable entry system type KDL/E+

General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.