



4. PVC Wiring Ducts Product Range

4.2 PVC Wiring Duct with Additional Holes (Wide Slotted) KKD Series

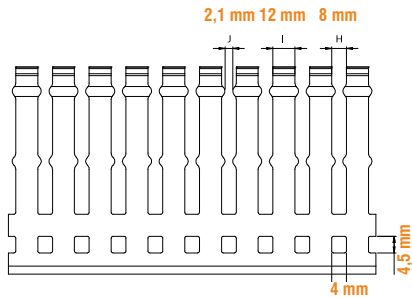

Order No	Product	Size WxH (mm)	Color	Qty.
555 4060WS	KKD 4060	40x60	Grey	50x2 m
555 4080WS	KKD 4080	40x80	Grey	50x2 m
555 4010WS	KKD 4010	40x100	Grey	30x2 m
555 6060WS	KKD 6060	60x60	Grey	28x2 m
555 6080WS	KKD 6080	60x80	Grey	22x2 m
555 6010WS	KKD 6010	60x100	Grey	26x2 m
555 8060WS	KKD 8060	80x60	Grey	18x2 m
555 8080WS	KKD 8080	80x80	Grey	20x2 m
555 8010WS	KKD 8010	80x100	Grey	14x2 m
555 1006WS	KKD 1006	100x60	Grey	18x2 m
555 1008WS	KKD 1008	100x80	Grey	12x2 m
555 1001WS	KKD 1001	100x100	Grey	12x2 m
555 1206WS	KKD 1206	120x60	Grey	18x2 m
555 1208WS	KKD 1208	120x80	Grey	18x2 m
555 1201WS	KKD 1201	120x100	Grey	14x2 m
555 1501WS	KKD 1501	150x100	Grey	10x2 m




- Can be used with cable tie thanks to additional holes on the sides.
- Flame-retardant, self-extinguishing according to UL94-V0
- Upper scorline is available for breaking off the ribs.
- Lower scorline is available.
- Operating Temperature: -5°C to 60°C
- Standard Length: 2 meters
- Color Option: RAL 7030 Grey
- Complies with RoHS regulations.
- Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

* Wiring duct covers are included the package.




4. PVC Wiring Ducts Product Range

4.1 PVC Wiring Duct with Additional Holes KKD Series

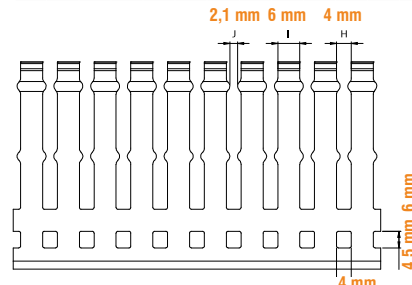

Order No	Product	Size WxH (mm)	Color	Qty.
555 2530	KKD 2530	25x30	Grey	50x2 m
555 2540	KKD 2540	25x40	Grey	50x2 m
555 2560	KKD 2560	25x60	Grey	30x2 m
555 2580	KKD 2580	25x80	Grey	28x2 m
555 2510	KKD 2510	25x100	Grey	22x2 m
555 4040	KKD 4040	40x40	Grey	26x2 m
555 4060	KKD 4060	40x60	Grey	18x2 m
555 4080	KKD 4080	40x80	Grey	20x2 m
555 4010	KKD 4010	40x100	Grey	14x2 m
555 6040	KKD 6040	60x40	Grey	18x2 m
555 6060	KKD 6060	60x60	Grey	12x2 m
555 6080	KKD 6080	60x80	Grey	12x2 m
555 6010	KKD 6010	60x100	Grey	18x2 m
555 8040	KKD 8040	80x40	Grey	18x2 m
555 8060	KKD 8060	80x60	Grey	14x2 m
555 8080	KKD 8080	80x80	Grey	10x2 m
555 8010	KKD 8010	80x100	Grey	12x2 m
555 1006	KKD 1006	100x60	Grey	10x2 m
555 1008	KKD 1008	100x80	Grey	8x2 m
555 1001	KKD 1001	100x100	Grey	12x2 m
555 1206	KKD 1206	120x60	Grey	8x2 m
555 1208	KKD 1208	120x80	Grey	6x2 m
555 1201	KKD 1201	120x100	Grey	10x2 m



- Can be used with cable tie thanks to additional holes on the sides.
- Flame-retardant, self-extinguishing according to UL94-V0
- Upper scorline is available for breaking off the ribs.
- Lower scorline is available.
- Operating Temperature: -5°C to 60°C
- Standard Length: 2 meters
- Color Option: RAL 7030 Grey
- Complies with RoHS regulations.
- Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

* Wiring duct covers are included the package.

