



TRANSPORTATION

**ROLLING STOCK
RAILWAY CABLES**

tecniKabel

SPECIAL ELECTRICAL AND OPTICAL CABLES

WWW.TECNIKABEL.COM

TecniKabel

SPECIAL ELECTRICAL AND OPTICAL CABLES



INTRODUCTION












The railway sector – train and underground – represents worldwide a strategic element able to balance the transport system, promoting fast and safe travels for increasingly demanding passengers and goods.

The main goal of the constant technological change is to enhance the quality of railway transport. The improvement led to the project of High Speed/High Capability network, combined with European transport network.

To respond to the constant development, Teknikabel offers a wide range of rolling stock products. This category of cables, is employed on last generation trains and metros, to ensure the operation of safety system, with its provided numerous devices communicating with ground's equipment.

In order to fulfill several passengers comfort requests, the reliability of transportation on which millions of people travel, submitted to extreme stresses, the company designs and manufactures innovative cables, according to national and international requirements (e.g. con EN 11170, DIN 5510, NFPA 130, EN 45545-2:2013 and NF C32-070:2001 standard) and special cables according to customer's needs.

PRODUCT LINES

| | |
|---|---------------------------------------|
|  | TRANSPORTATION |
|  | OIL / GAS & PETROCHEMICALS |
|  | TELECOMMUNICATION |
|  | OPTICAL |
|  | AUTOMATION |
|  | SUBMARINE |
|  | HEALTHCARE |
|  | AUDIOVIDEO |
|  | NAVAL |
|  | DEFENSE |
|  | HYBRID |
|  | BUILDING TECHNOLOGY |

TECNIKABEL

is focused on constant product innovation to get competitive advantages with endless commitment to research and development.

PRODUCTION

Updated production Systems, stringent process procedures and expert operators reached the goal to carry out our production efficient and flexible.

In 30 years of activity, we produced more than 26.000 different types of cables.

FINAL INSPECTIONS

At the end of every production process each cable is checked in its electrical and physical performances for a complete compliance to customer specifications.

LABORATORY TESTS

We submit our cables to the most severe tests, simulating critical applications. In addition to the tests required by current norms, we invest on new special equipment for additional mechanical and electrical testing, heading to a steady increase of standard performance of our cables.

MATERIALS RESEARCH AND DEVELOPMENT

Our thirty year experience took us to carry on research of new materials in order to improve performances, costs and fulfill the standards required by our customers.

QUALITY SYSTEM

Since 1978, constant commitment to Quality has awarded Tecnikabel approval from American and European Authorities, complying with the most demanding international manufacturing and quality standards.



USTED



| | |
|---|-----------|
| Symbols | 11 |
| Fire performances | 12 |
| POWER AND CONTROL CABLES | 16 |
| Table 1 | 17 |
| Single core cables unsheathed 0.6/1 kV - EN 50264-2-1 | 18 |
| Single core cables unsheathed 1.8/3 kV - EN 50264-2-1..... | 20 |
| Single core cables sheathed 1.8/3 kV - EN 50264-2-1..... | 22 |
| Single core cables sheathed 3.6/6 kV - EN 50264-2-1..... | 24 |
| Multicore unscreed cables 300/500 v - EN 50264-2-2..... | 26 |
| Multicore screed cables 300/500 V - EN 50264-2-2..... | 28 |
| Multicore unscreed cables 0.6/1 kV - EN 50264-2-2..... | 30 |
| Multicore screed cables 0.6/1 kV - EN 50264-2-2..... | 32 |
| Single core cables unsheathed 0.6/1 kV - EN 50264-3-1..... | 34 |
| Single core cables unsheathed 1.8/3 kV - EN 50264-3-1..... | 36 |
| Single core cables sheathed 1.8/3 kV - EN 50264-3-1..... | 38 |
| Single core cables sheathed 3.6/6 kV - EN 50264-3-1..... | 40 |
| Multicore unscreed cables 300/500 V - EN 50264-3-2..... | 42 |
| Multicore screed cables 300/500 V - EN 50264-3-2..... | 44 |
| Multicore unscreed cables 0.6/1 kV - EN 50264-3-2..... | 46 |
| Multicore screed cables 0.6/1 kV - EN 50264-3-2..... | 48 |
| FIRE RESISTANT POWER AND CONTROL CABLES | 50 |
| Table 2..... | 51 |
| Single core cables unsheathed 0.6/1 kV - EN 50200 / EN 50362 | 52 |
| Multicore unscreed cables 300/500 V - EN 50200 / EN 50362..... | 54 |
| Single and multicore screened cables with sheath 300/500 V - EN 50200 / EN 50362..... | 56 |
| MINIATURIZED CABLES | 58 |
| Table 3..... | 59 |
| Single core cables unsheathed 300/500 V - EN 50306-2..... | 60 |
| Single and multicore screened cables 300/500 V - EN 50306-3 | 62 |
| Multicore unscreed cables 300/500 V - EN 50306-4 | 64 |
| Single and multicore screed cables 300/500 V - EN 50306-4..... | 67 |
| Multipairs cables individually screened and sheathed with an overall sheath 300/500 V - EN 50306-4..... | 70 |
| TK-TRANSMISSION CABLES | 73 |
| TK-MVB 2x0.50 or 4x0.50 / 2x0.50 FR or 4x0.50 FR (MULTIFUNCTION VEHICLE BUS) | 74 |
| TK-MVB 4x0.50+4x0.25 (MULTIFUNCTION VEHICLE BUS) | 76 |
| TK-RS485 2x2x0.50 or 4x2x0.50..... | 78 |
| TK-RS485 2x0.50+1x0.50 | 80 |
| TK-RS485 2x0.60 | 82 |
| TK-RS485 2x2xAWG22..... | 84 |
| TK-CAN BUS 2x(2x0.25) or 2x(2x0.50) | 86 |
| TK-UIC WTB 2x0.50 or 2x0.75 / 2x0.50 FR or 2x0.75 FR (WIRED TRAIN BUS) | 88 |
| TK-UIC 9 CORE / 9 CORE FR | 90 |
| TK-UIC 12 CORE / 12 CORE FR..... | 92 |
| TK-UIC 16 CORE / 16 CORE FR..... | 94 |
| TK-UIC 18 CORE / 18 CORE FR | 96 |
| ETHERNET CABLES..... | 98 |
| TK-SF/UTP 2x2xAWG22 CAT.5E or 4x2xAWG22 CAT.5E | 99 |
| TK-SF/UTP 4xAWG22 CAT.5E / 4xAWG22 FR CAT.5E..... | 102 |
| TK-SF/UTP 4x2xAWG26 cat.5E | 105 |
| TK-SF/UTP 4x2xAWG24 cat.5E | 107 |

TK-S/FTP 4x2xAWG24 cat.7109

TK-S/FTP 4x2xAWG23 cat.7 111

TK-S/FTP 4x2xAWG23 Cat.7A 113

COAXIAL CABLES 115

TK-COAXIAL RG213.....116

TK-COAXIAL RG223117

TK-COAXIAL RG58..... 118

TK-COAXIAL RG400119

TK-COAXIAL RG58.....120

TK-COAXIAL RG214.....121

TK-COAXIAL RG142122

TK-COAXIAL RG174.....123

TK-COAXIAL AERIAL.....124

TK-COAXIAL RG59125

CCTV / VGA / AUDIO CABLES 126

TK-CCTV / VGA 3 COAX 75 Ω+3xAWG26 127

TK-AUDIO 3x(2x0.60)129

RF VALIDATION TICKET CABLES 131

TK-RF VALIDATION TICKET 2xAWG22.....132

TK-RF VALIDATION TICKET 4xAWG22+2xAWG22133

TK-RF VALIDATION TICKET 8xAWG22+2x(2xAWG22)134

HIGH INSULATION CABLES 135

TK-HIGH INSULATION136

TK-MULTICORE HIGH INSULATION137

ENVIRONMENTAL PROPERTIES



FLAME RETARDANT SINGLE WIRE
(EN/IEC 60332-1-2, EN 50265-2-1)



FLAME RETARDANT BUNCHED WIRES
(IEC 60332-3, EN 50305 9.1.2, EN 50305 9-1,
EN 50266-2-5, EN 50266-2)



FIRE RESISTANCE
(IEC 60331, EN50200, EN 50362,
BS6387 CWZ)



REDUCED EMISSION OF FUMES AND
TOXIC GASES (IEC 60754-1; EN 50267-2-
1/2, EN 50305 9.2)



SMOKE DENSITY (EN/IEC 61034-1/2)
(EN 50268-2; EN 50268-1/2)



LOW ACIDITY AND CORROSIVITY OF
EVOLVED GASES (IEC 60754-2,
EN 50267-2-2)



WEATHERING TEST RESISTANCE
(OUTDOOR)



INDOOR



WATER RESISTANCE



RODENT RESISTANCE



HAZARDOUS AREA



FLEXIBLE INSTALLATION



FULLY DIELECTRIC



DIRECT BURIAL



ANTIBALLISTIC
PROTECTION

CHEMICAL PROPERTIES



MUD RESISTANCE



MINERAL OIL RESISTANCE



HYDROCARBONS RESISTANCE

MECHANICAL PROPERTIES



MECHANICAL RESISTANCE



REDUCED BENDING RADIUS



WORK AT LOW TEMPERATURE





FIRE PERFORMANCES



IEC 60332-1-2 / EN 50265:

Fire propagation on a vertical single cable.

The single cable is mounted vertically and flamed with a Bunsen burner.

The flame must extinguish itself, at least 50 mm below the upper fixing clamp.

Temperature of burner, duration and angle of flame application, are described in the reference standards.



IEC 60332-3 / EN 50266 / EN 50305 9.1 :

Fire propagation on a vertical cables bundle.

A certain number of cable samples are fixed on a 3.5m long ladder, and flamed with an appropriate burner.

The samples number, the duration of flame application, and the power/temperature of burner are described in the reference standards. After flame application, the visible area of fire damage must not exceed 2.5 m in height from the bottom of the burner.

The volume of tested material define a differentiation in categories:


A/FR Part 3-21 7 l/m

A Part 3-22 7 l/m

B Part 3-23 3.5 l/m

C Part 3-24 1.5 l/m

D Part 3-25 0.5 l/m

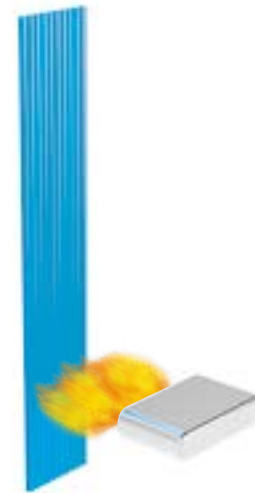


IEC 60331 / EN 50200 / EN 50362 : Fire test resistance.

A sample of cable is horizontally applied supported by metal rings, or in U shape fixed on a fireproof wall.

Through using a gas burner the cable It's maintained in flame contact for a certain time.

The test and the temperature of burner are described in the reference standards. In U shape test, the fireproof wall is hit every five minutes by a mechanical shock, to simulate a potential collapse during the fire.

The time of fire application, and the temperature of flame are described in the reference standards (typical 750°C or 830°C). During the test a current for continuity checking is passed through all conductors of the cable and the voltage must be maintained during the test duration.

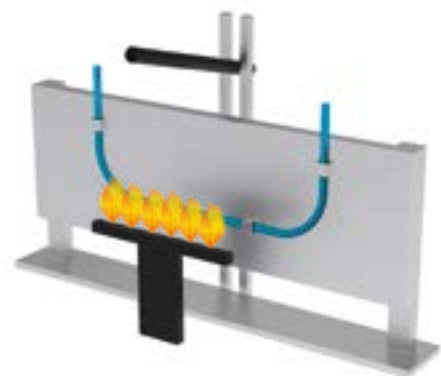

IEC 61034-1/2 / EN 50268-1/2: Measurement of smoke density of cables burning under defined conditions.

A few samples of cable are burnt in a cubic (3x3x3m) chamber using a flammable liquid.

The light transmittance of the resulting smoke is measured using an optical light detector. The test duration is about 40 minutes, depending by the quantity and composition of the liquid fuel. At the end of the test the light transmittance of the smoke must be 60% minimum.

IEC 60754-1 / EN 50267-2-1/2: Test on gases evolved during combustion of materials from cables - Determination of the halogen acid gas content.

This standard covers the general aspects of potential hazard caused from corrosiveness of smoke and combustion gases.


A small quantity of non-metallic material is heated in a tube, the resulting gases are tested for their halogen content. The flame temperature is $800\text{ }^{\circ}\text{C} \pm 10\text{ }^{\circ}\text{C}$, with a test duration of 40 ± 5 min in total.

The halogen content of non-metallic materials must be less than 0.5% or 5 mg/g.

IEC 60754-2 / EN 50267-2-2: Test on gases evolved during combustion of materials from cables - Determination of acidity (by pH measurement) and conductivity.

A small quantity of non-metallic material is burnt in a furnace, the pH and conductivity combustion gases dissolved in water are measured.

The minimum pH value of the washing water must 4.3, and the maximum conductivity must be $10\text{ }\mu\text{S}/\text{mm}$.

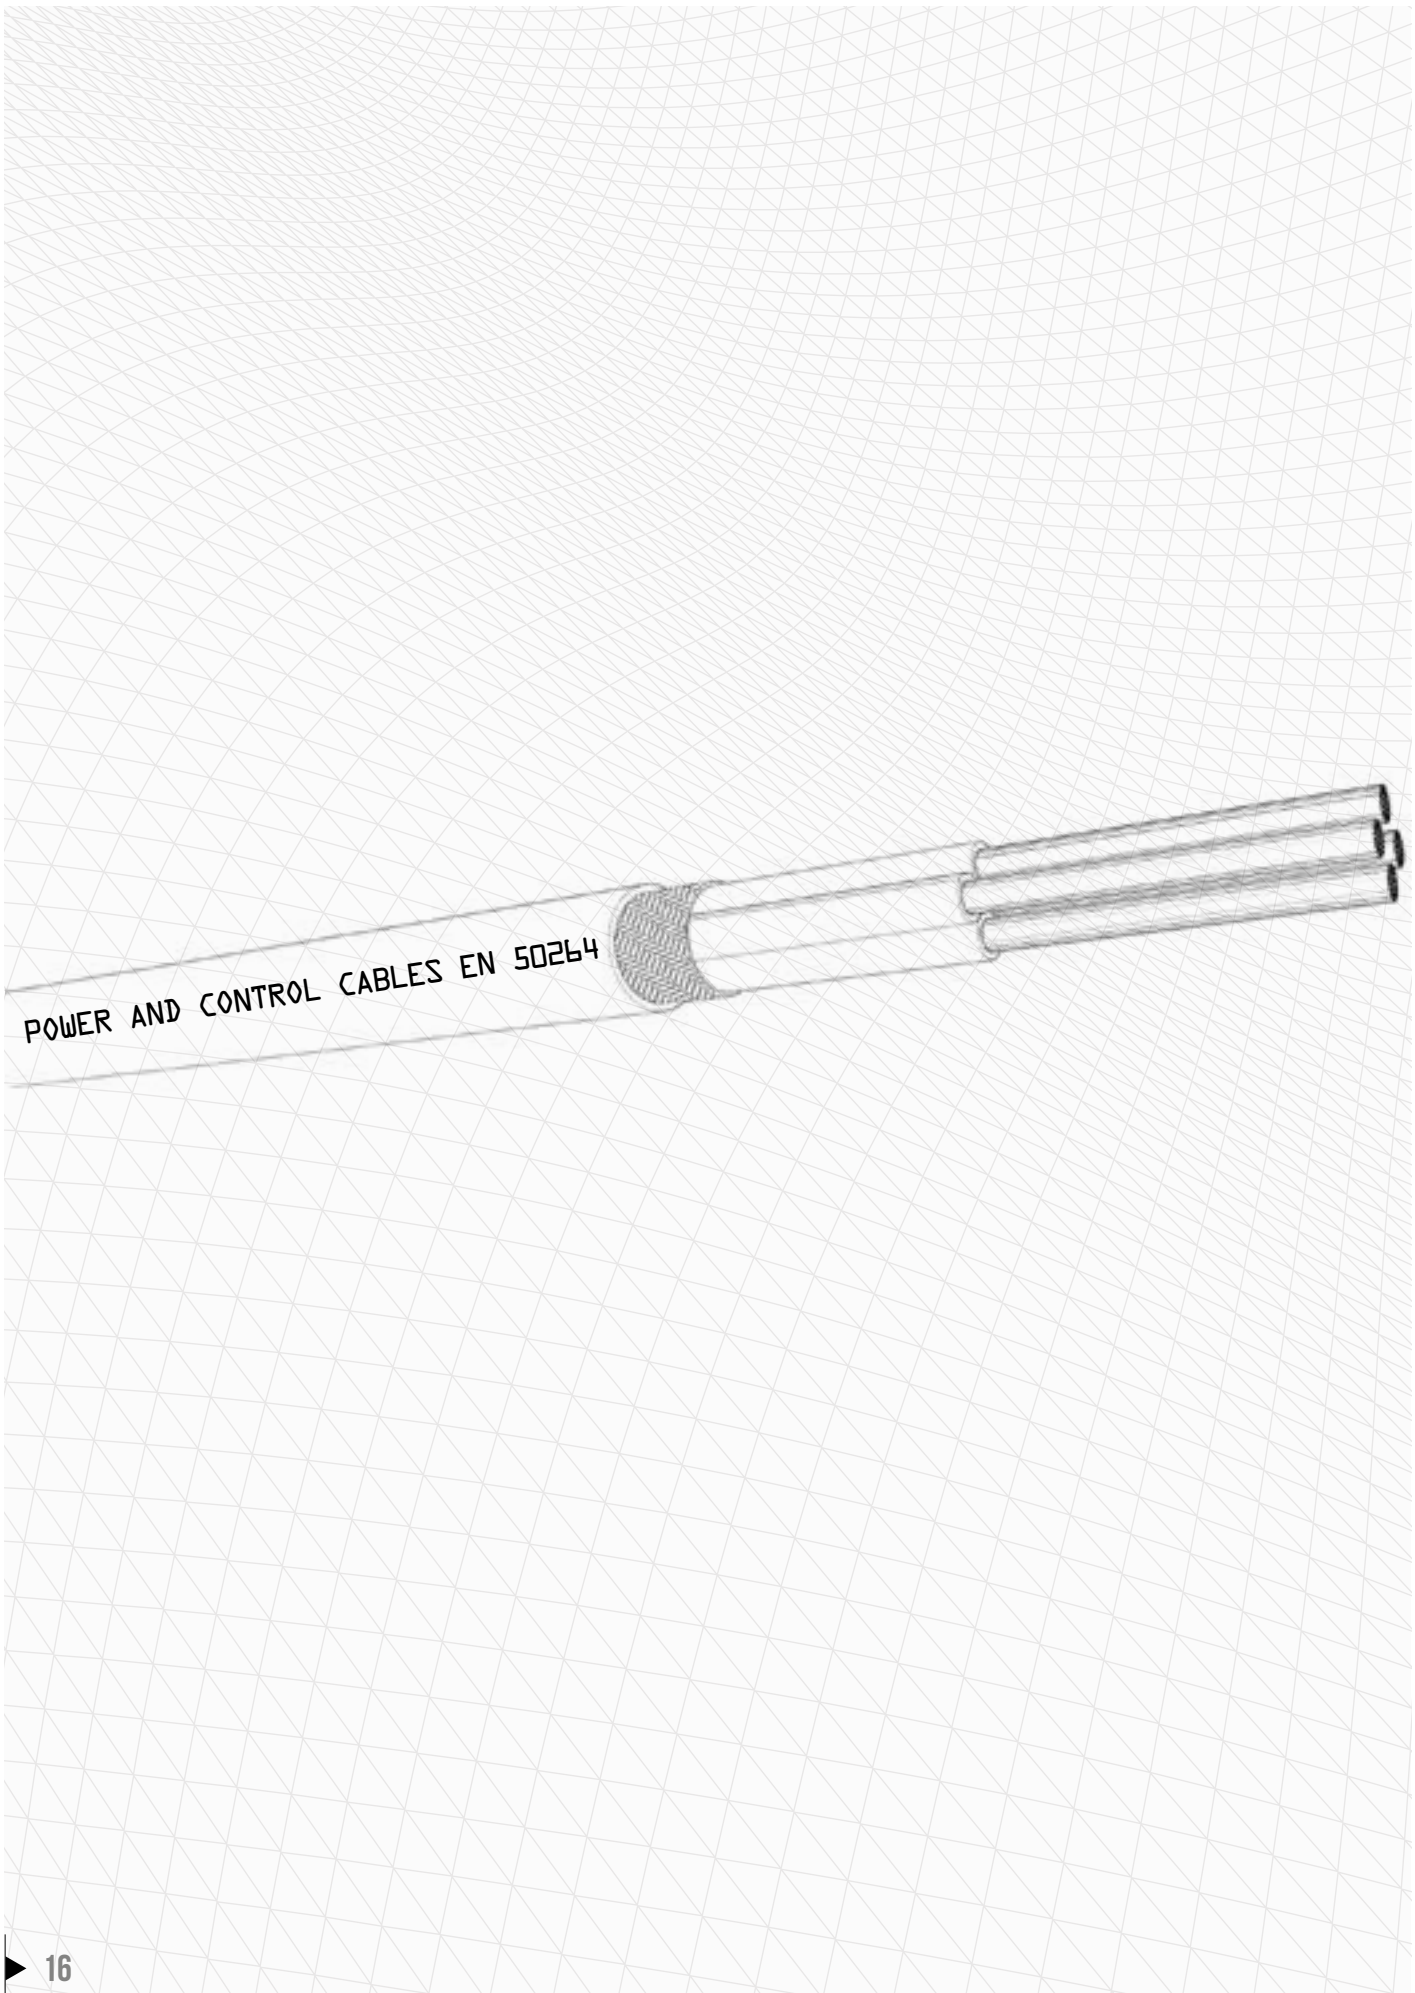

POWER AND CONTROL CABLES

HAVING SPECIAL FIRE PERFORMANCE

Standard Reference

EN 50264; EN 50305; EN 50355; EN 50343; EN 45545-2 HL3; UNI CEI 11170-3 LR4; DIN 5510-2; BS 6853; NFPA 130

CODE DESIGNATIONS

Insulation System (EN 50264-2-1 and 2-2)

| | |
|--|--------------------|
| EI 101 Low Temperature Resistant, Oil Resistant | Code Designation C |
| EI 102 Extra Low Temperature Resistant, Oil Resistant | Code Designation F |
| EI 103 Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation J |
| EI 104 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation M |
| EI 105 Extra Low Temperature Resistant, Non Oil Resistant | Code Designation O |

Insulation System (EN 50264-3-1 and 3-2)

| | |
|--|--------------------|
| EI 106 Low Temperature Resistant, Oil Resistant | Code Designation C |
| EI 107 Extra Low Temperature Resistant, Oil Resistant | Code Designation F |
| EI 108 Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation J |
| EI 109 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation M |
| EI 110 Extra Low Temperature Resistant, Non Oil Resistant | Code Designation O |

Sheath Type (EN 50264-2-1, EN 50264-2-2, EN 50264-3-1 and EN 50264-3-2)

| | |
|---|--------------------|
| EM 101 Low Temperature Resistant, Oil Resistant..... | Code Designation C |
| EM 102 Extra Low Temperature Resistant, Oil Resistant | Code Designation F |
| EM 103 Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation J |
| EM 104 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant..... | Code Designation M |

SINGLE CORE CABLES UNSHEATHED 0.6/1 kV - EN 50264-2-1



CABLE SPECIFICATIONS

| | |
|----------------------------|--|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 0.6/1 kV |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)

(*)

(*)see table 1

SINGLE CORE CABLES UNSHEATHED 0.6/1 kV - EN 50264-2-1

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter d | Mean thickness of insulation | Overall diameter D | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.0 | 1.25 | 0.8 | 2.8 | 3.2 | 20.0 | 65 |
| 1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 13.7 | 55 |
| 2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 8.21 | 50 |
| 4 | 2.5 | 0.8 | 3.9 | 4.6 | 5.09 | 40 |
| 6 | 3.0 | 0.9 | 4.6 | 5.4 | 3.39 | 35 |
| 10 | 3.9 | 1.1 | 5.8 | 6.8 | 1.95 | 30 |
| 16 | 5.0 | 1.1 | 7.2 | 8.5 | 1.24 | 30 |
| 25 | 6.4 | 1.3 | 8.6 | 10.0 | 0.795 | 30 |
| 35 | 7.7 | 1.3 | 10.2 | 11.5 | 0.565 | 25 |
| 50 | 9.2 | 1.5 | 11.6 | 13.5 | 0.393 | 25 |
| 70 | 11.0 | 1.5 | 13.3 | 15.5 | 0.277 | 20 |
| 95 | 12.5 | 1.6 | 14.9 | 17.4 | 0.210 | 20 |
| 120 | 14.2 | 1.6 | 16.5 | 19.3 | 0.164 | 20 |
| 150 | 15.8 | 1.9 | 18.5 | 21.7 | 0.132 | 15 |
| 185 | 17.5 | 1.9 | 20.1 | 23.6 | 0.108 | 15 |
| 240 | 20.1 | 2.1 | 22.9 | 26.8 | 0.0817 | 15 |
| 300 | 22.5 | 2.2 | 25.4 | 29.7 | 0.0654 | 10 |
| 400 | 25.8 | 2.3 | 28.7 | 33.6 | 0.0495 | 10 |



SINGLE CORE CABLES UNSHEATHED 1.8/3 kV - EN 50264-2-1



CABLE SPECIFICATIONS

| | |
|----------------------------|--|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 1.8/3 kV |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 1












SINGLE CORE CABLES UNSHEATHED 1.8/3 kV - EN 50264-2-1

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter d | Mean thickness of insulation | Overall diameter D | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.5 | 1.5 | 2.5 | 6.2 | 7.3 | 13.7 | 120 |
| 2.5 | 1.95 | 2.5 | 6.6 | 7.8 | 8.21 | 100 |
| 4 | 2.5 | 2.5 | 7.1 | 8.4 | 5.09 | 90 |
| 6 | 3.0 | 2.5 | 7.6 | 8.9 | 3.39 | 80 |
| 10 | 3.9 | 2.5 | 8.4 | 9.9 | 1.95 | 65 |
| 16 | 5.0 | 2.5 | 9.5 | 11.1 | 1.24 | 55 |
| 25 | 6.4 | 2.5 | 10.8 | 12.7 | 0.795 | 45 |
| 35 | 7.7 | 2.5 | 12.0 | 14.1 | 0.565 | 40 |
| 50 | 9.2 | 2.5 | 13.4 | 15.7 | 0.393 | 35 |
| 70 | 11.0 | 2.5 | 15.1 | 17.7 | 0.277 | 30 |
| 95 | 12.5 | 2.7 | 16.9 | 19.8 | 0.210 | 30 |
| 120 | 14.2 | 2.7 | 18.5 | 21.7 | 0.164 | 25 |
| 150 | 15.8 | 2.7 | 20.0 | 23.4 | 0.132 | 20 |
| 185 | 17.5 | 2.7 | 21.6 | 25.3 | 0.108 | 20 |
| 240 | 20.1 | 2.7 | 24.1 | 28.2 | 0.0817 | 20 |
| 300 | 22.5 | 2.7 | 26.3 | 30.8 | 0.0654 | 15 |
| 400 | 25.8 | 2.9 | 29.8 | 34.9 | 0.0495 | 15 |



SINGLE CORE CABLES SHEATHED 1.8/3 kV - EN 50264-2-1

| | | | |
|---|-----------------------------|-------------------------------|--|
|     | CABLE SPECIFICATIONS | Conductor | Stranded tinned copper class 5 according to EN 60228 |
| | | Separator | Eventual polyester colored tape |
| | | Insulation | Type crosslinked LSZH see table 1 |
| | | Core identification | Black if not elsewhere specified |
|     | TECHNICAL DATA | Operating voltage | 1.8/3 kV |
| | | Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| | | Minimum bending radius | 5xØ |
| | | Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
|    | FIRE PERFORMANCE | Smoke density | EN 61034-1/2 |
| | | Halogen-free | EN 50267-2-1/2 |
| | | Fumes | No corrosive and toxic fumes |
| | | | |

(*)see table 1












SINGLE CORE CABLES SHEATHED 1.8/3 kV - EN 50264-2-1

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter d | Mean thickness of insulation | Mean thickness of sheath | Overall diameter D | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.5 | 1.5 | 1.3 | 1.4 | 6.7 | 7.8 | 13.7 | 960 |
| 2.5 | 1.95 | 1.3 | 1.4 | 7.1 | 8.3 | 8.21 | 850 |
| 4 | 2.5 | 1.3 | 1.4 | 7.6 | 8.9 | 5.09 | 750 |
| 6 | 3.0 | 1.3 | 1.4 | 8.1 | 9.5 | 3.39 | 670 |
| 10 | 3.9 | 2.2 | 1.4 | 10.6 | 12.4 | 1.95 | 550 |
| 16 | 5.0 | 2.2 | 1.4 | 11.7 | 13.6 | 1.24 | 450 |
| 25 | 6.4 | 2.2 | 1.4 | 13.0 | 15.2 | 0.795 | 390 |
| 35 | 7.7 | 2.2 | 1.4 | 14.2 | 16.6 | 0.565 | 350 |
| 50 | 9.2 | 2.2 | 1.4 | 15.6 | 18.3 | 0.393 | 300 |
| 70 | 11.0 | 2.2 | 1.5 | 17.5 | 20.5 | 0.277 | 260 |
| 95 | 12.5 | 2.4 | 1.6 | 19.6 | 22.3 | 0.210 | 250 |
| 120 | 14.2 | 2.4 | 1.6 | 21.1 | 24.6 | 0.164 | 220 |
| 150 | 15.8 | 2.4 | 1.7 | 22.7 | 26.6 | 0.132 | 210 |
| 185 | 17.5 | 2.4 | 1.7 | 24.0 | 28.1 | 0.1080 | 200 |
| 240 | 20.1 | 2.4 | 1.8 | 27.0 | 31.6 | 0.0817 | 180 |
| 300 | 22.5 | 2.4 | 1.9 | 29.4 | 34.4 | 0.0654 | 170 |
| 400 | 25.8 | 2.6 | 2.0 | 32.7 | 38.3 | 0.0495 | 150 |



SINGLE CORE CABLES SHEATHED 3.6/6 kV - EN 50264-2-1

| | | | |
|--|-----------------------------|-------------------------------|--|
|     | CABLE SPECIFICATIONS | Conductor | Stranded tinned copper class 5 according to EN 60228 |
| | | Separator | Semiconductor black tape |
| | | Insulation | Type crosslinked LSZH see table 1 |
| | | Core identification | Black if not elsewhere specified |
|     | TECHNICAL DATA | Operating voltage | 3.6/6 kV |
| | | Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| | | Minimum bending radius | 5xØ |
| | | Fire performance | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
|  (*)   (*) | FIRE PERFORMANCE | Smoke density | EN 61034-1/2 |
| | | Halogen-free | EN 50267-2-1/2 |
| | | Fumes | No corrosive and toxic fumes |
| | | | |

(*)see table 1


SINGLE CORE CABLES SHEATHED 3.6/6 kV - EN 50264-2-1

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter d | Mean thickness of insulation | Mean thickness of sheath | Overall diameter D | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2.5 | 1.95 | 3.0 | 1.4 | 10.5 | 12.3 | 8.21 | 1300 |
| 4 | 2.5 | 3.0 | 1.4 | 11.0 | 12.9 | 5.09 | 1150 |
| 6 | 3.0 | 3.0 | 1.4 | 11.5 | 13.4 | 3.39 | 1050 |
| 10 | 3.9 | 3.0 | 1.4 | 12.3 | 14.4 | 1.95 | 850 |
| 16 | 5.0 | 3.0 | 1.4 | 13.3 | 15.6 | 1.24 | 710 |
| 25 | 6.4 | 3.0 | 1.4 | 14.7 | 17.2 | 0.795 | 630 |
| 35 | 7.7 | 3.0 | 1.4 | 15.9 | 18.6 | 0.565 | 550 |
| 50 | 9.2 | 3.0 | 1.5 | 17.5 | 20.5 | 0.393 | 500 |
| 70 | 11.0 | 3.0 | 1.5 | 19.2 | 22.4 | 0.277 | 430 |
| 95 | 12.5 | 3.0 | 1.6 | 20.8 | 24.3 | 0.210 | 400 |
| 120 | 14.2 | 3.1 | 1.7 | 22.7 | 26.6 | 0.164 | 360 |
| 150 | 15.8 | 3.1 | 1.7 | 24.2 | 28.4 | 0.132 | 340 |
| 185 | 17.5 | 3.2 | 1.8 | 26.2 | 30.7 | 0.1080 | 330 |
| 240 | 20.1 | 3.4 | 1.9 | 29.2 | 34.2 | 0.0817 | 300 |
| 300 | 22.5 | 3.4 | 1.9 | 31.5 | 36.9 | 0.0654 | 250 |
| 400 | 25.8 | 3.4 | 2.0 | 34.8 | 40.7 | 0.0495 | 230 |



MULTICORE UNSCREENED CABLES 300/500 V - EN 50264-2-2

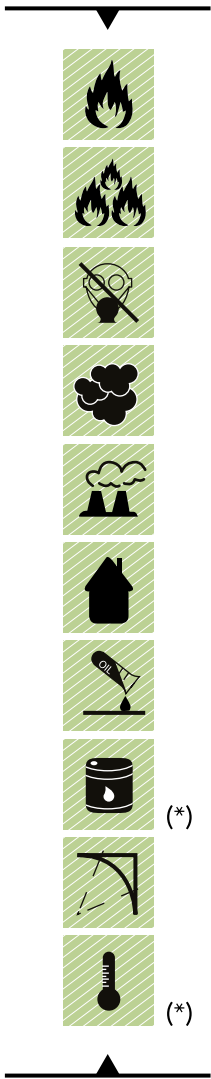

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |


(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.4 | 7.2 | 8.5 | 20.0 | 140 |
| 4x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.4 | 8.2 | 9.6 | 20.0 | 140 |
| 7x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.4 | 9.6 | 11.2 | 20.0 | 140 |
| 9x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.4 | 11.5 | 13.4 | 20.0 | 140 |
| 12x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.4 | 12.3 | 14.4 | 20.0 | 140 |
| 19x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.4 | 14.5 | 16.6 | 20.0 | 140 |
| 24x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.5 | 16.7 | 19.6 | 20.0 | 140 |
| 32x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.6 | 18.5 | 21.7 | 20.0 | 140 |
| 37x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.6 | 19.2 | 22.4 | 20.0 | 140 |
| 40x1 | 1.25 | 0.6 | 2.4 | 2.8 | 1.6 | 19.9 | 23.3 | 20.0 | 140 |
| | | | | | | | | | |
| 4x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.4 | 9.2 | 10.8 | 13.7 | 120 |
| 7x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.4 | 10.9 | 12.8 | 13.7 | 120 |
| 9x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.4 | 13.1 | 15.3 | 13.7 | 120 |
| 12x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.4 | 14.0 | 16.4 | 13.7 | 120 |
| 19x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.4 | 16.5 | 19.4 | 13.7 | 120 |
| 24x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.5 | 19.5 | 22.8 | 13.7 | 120 |
| 32x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.6 | 21.5 | 25.2 | 13.7 | 120 |
| 37x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 1.7 | 22.4 | 26.2 | 13.7 | 120 |
| | | | | | | | | | |
| 4x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 1.4 | 10.7 | 12.5 | 8.21 | 90 |
| 7x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 1.4 | 12.7 | 14.9 | 8.21 | 90 |
| 9x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 1.5 | 15.6 | 18.3 | 8.21 | 90 |
| 12x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 1.5 | 16.7 | 19.6 | 8.21 | 90 |
| 19x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 1.6 | 19.7 | 23.1 | 8.21 | 90 |
| 24x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 1.8 | 23.5 | 27.5 | 8.21 | 90 |

MULTICORE SCREENED CABLES 300/500 V - EN 50264-2-2

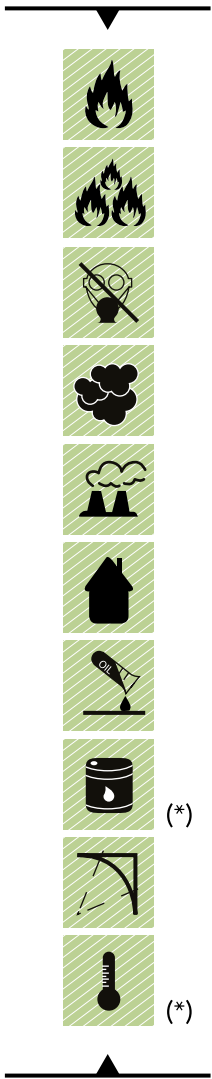

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Screen | Tinned copper braid |
| Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |


(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Wire diameter of screen | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.16 | 1.4 | 8.1 | 9.5 | 20.0 | 140 |
| 4x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.16 | 1.4 | 9.0 | 10.6 | 20.0 | 140 |
| 7x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.16 | 1.4 | 10.4 | 12.2 | 20.0 | 140 |
| 9x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.21 | 1.4 | 12.5 | 14.6 | 20.0 | 140 |
| 12x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.21 | 1.4 | 13.3 | 15.6 | 20.0 | 140 |
| 19x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.26 | 1.4 | 15.7 | 18.4 | 20.0 | 140 |
| 24x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.26 | 1.5 | 18.1 | 21.2 | 20.0 | 140 |
| 32x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.26 | 1.6 | 19.7 | 23.1 | 20.0 | 140 |
| 37x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.26 | 1.7 | 20.7 | 24.2 | 20.0 | 140 |
| 40x1 | 1.25 | 0.6 | 2.4 | 2.8 | 0.26 | 1.7 | 21.4 | 25.1 | 20.0 | 140 |
| | | | | | | | | | | |
| 4x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.16 | 1.4 | 10.1 | 11.8 | 13.7 | 120 |
| 7x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.21 | 1.4 | 11.9 | 14.0 | 13.7 | 120 |
| 9x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.21 | 1.4 | 14.1 | 16.5 | 13.7 | 120 |
| 12x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.21 | 1.8 | 15.8 | 18.5 | 13.7 | 120 |
| 19x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.26 | 1.5 | 17.8 | 20.8 | 13.7 | 120 |
| 24x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.26 | 1.6 | 20.7 | 24.2 | 13.7 | 120 |
| 32x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.26 | 1.7 | 22.7 | 26.6 | 13.7 | 120 |
| 37x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.26 | 1.7 | 23.6 | 27.6 | 13.7 | 120 |
| | | | | | | | | | | |
| 4x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 0.21 | 1.4 | 11.8 | 13.0 | 8.21 | 90 |
| 7x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 0.21 | 1.4 | 13.7 | 16.1 | 8.21 | 90 |
| 9x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 0.26 | 1.5 | 16.8 | 19.7 | 8.21 | 90 |
| 12x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 0.26 | 1.5 | 18.0 | 21.1 | 8.21 | 90 |
| 19x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 0.26 | 1.6 | 21.1 | 24.6 | 8.21 | 90 |
| 24x2.5 | 1.95 | 0.8 | 3.4 | 4.0 | 0.26 | 1.8 | 24.7 | 28.9 | 8.21 | 90 |

MULTICORE UNSCREENED CABLES 0.6/1 KV - EN 50264-2-2

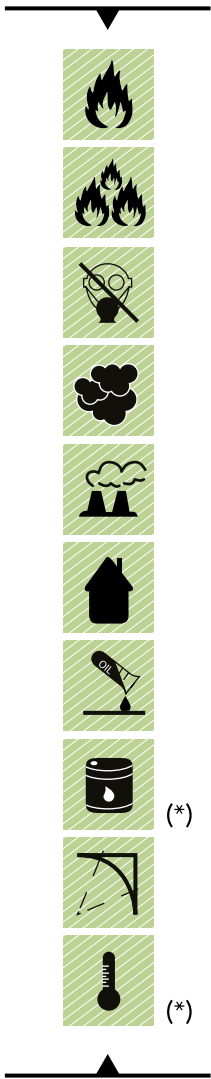

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 0,6/1 kV |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |











(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter \emptyset | Mean thickness of insulation | Core diameter | | Mean thickness of sheath | Overall diameter \emptyset | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|--------------------------------|------------------------------|---------------|------|--------------------------|------------------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω /km] | [M Ω xkm] |
| 2x1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 1.4 | 8.5 | 9.9 | 13.7 | 150 |
| 3x1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 1.4 | 8.9 | 10.5 | 13.7 | 150 |
| 4x1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 1.4 | 9.7 | 11.3 | 13.7 | 150 |
| 2x2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 1.4 | 9.3 | 10.9 | 8.21 | 130 |
| 3x2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 1.4 | 9.9 | 11.6 | 8.21 | 130 |
| 4x2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 1.4 | 10.7 | 12.5 | 8.21 | 130 |
| 2x4 | 2.5 | 0.8 | 3.9 | 4.6 | 1.4 | 10.3 | 12.1 | 5.09 | 110 |
| 3x4 | 2.5 | 0.8 | 3.9 | 4.6 | 1.4 | 11.0 | 12.9 | 5.09 | 110 |
| 3x4 | 2.5 | 0.8 | 3.9 | 4.6 | 1.4 | 11.9 | 14.0 | 5.09 | 110 |
| 2x6 | 3.0 | 0.9 | 4.6 | 5.4 | 1.4 | 11.8 | 13.9 | 3.99 | 90 |
| 3x6 | 3.0 | 0.9 | 4.6 | 5.4 | 1.4 | 12.5 | 14.6 | 3.99 | 90 |
| 4x6 | 3.0 | 0.9 | 4.6 | 5.4 | 1.4 | 13.7 | 16.1 | 3.99 | 90 |
| 2x10 | 3.9 | 1.1 | 5.8 | 6.8 | 1.4 | 14.3 | 16.7 | 1.95 | 85 |
| 3x10 | 3.9 | 1.1 | 5.8 | 6.8 | 1.5 | 15.3 | 17.9 | 1.95 | 85 |
| 4x10 | 3.9 | 1.1 | 5.8 | 6.8 | 1.5 | 16.9 | 19.8 | 1.95 | 85 |
| 2x16 | 5.0 | 1.1 | 7.2 | 8.5 | 1.5 | 16.5 | 19.4 | 1.24 | 70 |
| 3x16 | 5.0 | 1.1 | 7.2 | 8.5 | 1.6 | 17.8 | 20.8 | 1.24 | 70 |
| 4x16 | 5.0 | 1.1 | 7.2 | 8.5 | 1.6 | 19.6 | 22.9 | 1.24 | 70 |
| 2x25 | 6.4 | 1.3 | 8.6 | 10.0 | 1.6 | 20.1 | 23.5 | 0.795 | 65 |
| 3x25 | 6.4 | 1.3 | 8.6 | 10.0 | 1.7 | 21.6 | 25.3 | 0.795 | 65 |
| 4x25 | 6.4 | 1.3 | 8.6 | 10.0 | 1.8 | 24.1 | 28.2 | 0.795 | 65 |
| 2x35 | 7.7 | 1.3 | 10.2 | 11.5 | 1.7 | 22.7 | 26.6 | 0.565 | 60 |
| 3x35 | 7.7 | 1.3 | 10.2 | 11.5 | 1.8 | 24.4 | 28.6 | 0.565 | 60 |
| 3x35+ 1x25 | 7.7 | 1.3 | 10.2 | 11.5 | 1.9 | 28.5 | 34.2 | 0.565 | 60 |
| 2x50 | 9.2 | 1.5 | 11.6 | 13.5 | 1.9 | 26.7 | 31.2 | 0.393 | 55 |
| 3x50 | 9.2 | 1.5 | 11.6 | 13.5 | 1.9 | 28.2 | 33.3 | 0.393 | 55 |
| 3x50+1x25 | 9.2 | 1.5 | 11.6 | 13.5 | 2.0 | 33.4 | 40.0 | 0.393 | 55 |

MULTICORE SCREENED CABLES 0.6/1 KV - EN 50264-2-2

| | | |
|---|-----------------------------|---|
|           | CABLE SPECIFICATIONS | <p>Conductor Stranded tinned copper class 5 according to EN 60228</p> <p>Separator Eventual polyester colored tape</p> <p>Insulation Type crosslinked LSZH see table 1</p> <p>Core identification Black numbered if not elsewhere specified</p> <p>Assembling N° conductors + eventual filler and tape are assembled together</p> <p>Screen Tinned copper braid</p> <p>Sheath Type crosslinked LSZH see table 1 Black if not elsewhere specified</p> |
| | TECHNICAL DATA | <p>Operating voltage 0.6/1 kV</p> <p>Operating temperature -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1</p> <p>Minimum bending radius 5xØ</p> |
| | FIRE PERFORMANCE | <p>Fire propagation EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4</p> <p>Smoke density EN 61034-1/2</p> <p>Halogen-free EN 50267-2-1/2</p> <p>Fumes No corrosive and toxic fumes</p> |

(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Wire diameter of screen | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 0.16 | 1.4 | 9.3 | 10.9 | 13.7 | 150 |
| 3x1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 0.16 | 1.4 | 9.8 | 11.4 | 13.7 | 150 |
| 4x1.5 | 1.5 | 0.8 | 3.0 | 3.5 | 0.16 | 1.4 | 10.5 | 12.3 | 13.7 | 150 |
| 2x2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 0.16 | 1.4 | 10.2 | 11.9 | 8.2 | 130 |
| 3x2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 0.16 | 1.4 | 10.7 | 12.5 | 8.2 | 130 |
| 4x2.5 | 1.95 | 0.8 | 3.4 | 3.9 | 0.21 | 1.4 | 11.8 | 13.9 | 8.2 | 130 |
| 2x4 | 2.5 | 0.8 | 3.9 | 4.6 | 0.21 | 1.4 | 11.5 | 13.4 | 5.1 | 110 |
| 3x4 | 2.5 | 0.8 | 3.9 | 4.6 | 0.21 | 1.4 | 12.0 | 14.1 | 5.1 | 110 |
| 3x4 | 2.5 | 0.8 | 3.9 | 4.6 | 0.21 | 1.4 | 13.1 | 15.3 | 5.1 | 110 |
| 2x6 | 3.0 | 0.9 | 4.6 | 5.4 | 0.21 | 1.4 | 12.9 | 15.1 | 4.0 | 90 |
| 3x6 | 3.0 | 0.9 | 4.6 | 5.4 | 0.21 | 1.4 | 13.6 | 16.0 | 4.0 | 90 |
| 4x6 | 3.0 | 0.9 | 4.6 | 5.4 | 0.21 | 1.4 | 14.9 | 17.4 | 4.0 | 90 |
| 2x10 | 3.9 | 1.1 | 5.8 | 6.8 | 0.21 | 1.5 | 15.5 | 18.2 | 2.0 | 85 |
| 3x10 | 3.9 | 1.1 | 5.8 | 6.8 | 0.26 | 1.5 | 16.7 | 19.6 | 2.0 | 85 |
| 4x10 | 3.9 | 1.1 | 5.8 | 6.8 | 0.26 | 1.6 | 18.4 | 21.6 | 2.0 | 85 |
| 2x16 | 5.0 | 1.1 | 7.2 | 8.5 | 0.26 | 1.5 | 17.9 | 20.9 | 1.2 | 70 |
| 3x16 | 5.0 | 1.1 | 7.2 | 8.5 | 0.26 | 1.6 | 19.1 | 22.3 | 1.2 | 70 |
| 4x16 | 5.0 | 1.1 | 7.2 | 8.5 | 0.26 | 1.7 | 21.1 | 24.6 | 1.2 | 70 |
| 2x25 | 6.4 | 1.3 | 8.6 | 10.0 | 0.26 | 1.7 | 21.6 | 25.3 | 0.8 | 65 |
| 3x25 | 6.4 | 1.3 | 8.6 | 10.0 | 0.26 | 1.7 | 22.9 | 26.8 | 0.8 | 65 |
| 4x25 | 6.4 | 1.3 | 8.6 | 10.0 | 0.31 | 1.8 | 25.6 | 29.9 | 0.8 | 65 |
| 2x35 | 7.7 | 1.3 | 10.2 | 11.5 | 0.31 | 1.8 | 24.4 | 28.6 | 0.6 | 60 |
| 3x35 | 7.7 | 1.3 | 10.2 | 11.5 | 0.31 | 1.8 | 26.0 | 30.5 | 0.6 | 60 |
| 3x35+ 1x25 | 7.7 | 1.3 | 10.2 | 11.5 | 0.31 | 1.9 | 30.0 | 35.1 | 0.6 | 60 |
| 2x50 | 9.2 | 1.5 | 11.6 | 13.5 | 0.31 | 1.9 | 28.2 | 33.0 | 0.4 | 55 |
| 3x50 | 9.2 | 1.5 | 11.6 | 13.5 | 0.31 | 2.0 | 30.3 | 35.4 | 0.4 | 55 |
| 3x50+1x25 | 9.2 | 1.5 | 11.6 | 13.5 | 0.31 | 2.1 | 34.9 | 40.8 | 0.4 | 55 |

SINGLE CORE CABLES UNSHEATHED 0.6/1 kV - EN 50264-3-1

| | | | |
|--------------|-----------------------------|-------------------------------|--|
| | CABLE SPECIFICATIONS | Conductor | Stranded tinned copper class 5 according to EN 60228 |
| | | Separator | Eventual polyester colored tape |
| | | Insulation | Type crosslinked LSZH see table 1 |
| | | Core identification | Black if not elsewhere specified |
| | TECHNICAL DATA | Operating voltage | 0.6/1 kV |
| | | Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| | | Minimum bending radius | 5xØ |
| | FIRE PERFORMANCE | Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| | | Smoke density | EN 61034-1/2 |
| | | Halogen-free | EN 50267-2-1/2 |
| Fumes | | No corrosive and toxic fumes | |
| (*) | | | |
| (*) | | | |

(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Overall diameter Ø | | Resistance of conductor @ 20° C | Insulation resistance @ 20° C |
|------------------------------|-------------------------|------------------------------|-----------------------|------|------------------------------------|----------------------------------|
| | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.0 | 1.25 | 0.6 | 2.4 | 2.8 | 20 | 11.4 |
| 1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 13.7 | 11.0 |
| 2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 8.21 | 9.1 |
| 4 | 2.5 | 0.7 | 3.8 | 4.4 | 5.09 | 7.5 |
| 6 | 3.0 | 0.7 | 4.2 | 5.0 | 3.39 | 6.5 |
| 10 | 3.9 | 0.7 | 5.1 | 5.9 | 1.95 | 5.2 |
| 16 | 5.0 | 0.7 | 6.1 | 7.2 | 1.24 | 4.2 |
| 25 | 6.4 | 0.9 | 7.8 | 9.1 | 0.795 | 4.1 |
| 35 | 7.7 | 0.9 | 9.0 | 10.6 | 0.565 | 3.5 |
| 50 | 9.2 | 1.0 | 10.6 | 12.4 | 0.393 | 3.3 |
| 70 | 11.0 | 1.1 | 12.5 | 14.6 | 0.277 | 3.0 |
| 95 | 12.5 | 1.1 | 13.9 | 16.3 | 0.210 | 2.7 |
| 120 | 14.2 | 1.2 | 15.7 | 18.4 | 0.164 | 2.7 |
| 150 | 15.8 | 1.4 | 17.6 | 20.6 | 0.132 | 2.7 |
| 185 | 17.5 | 1.6 | 19.6 | 22.9 | 0.108 | 2.6 |
| 240 | 20.1 | 1.7 | 22.2 | 26.0 | 0.0817 | 2.6 |
| 300 | 22.5 | 1.8 | 24.6 | 28.8 | 0.0654 | 2.4 |
| 400 | 25.8 | 2.0 | 28.1 | 32.9 | 0.0495 | 2.4 |

SINGLE CORE CABLES UNSHEATHED 1.8/3 kV - EN 50264-3-1



CABLE SPECIFICATIONS

| | |
|----------------------------|--|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 1.8/3 kV |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 1



SINGLE CORE CABLES UNSHEATHED 1.8/3 kV - EN 50264-3-1

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|-------------------------|------------------------------|-----------------------|------|----------------------------------|--------------------------------|
| | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.5 | 1.5 | 2.0 | 5.3 | 6.2 | 13.7 | 21.0 |
| 2.5 | 1.95 | 2.0 | 5.7 | 6.7 | 8.21 | 18.0 |
| 4 | 2.5 | 2.0 | 6.2 | 7.3 | 5.09 | 15.5 |
| 6 | 3.0 | 2.0 | 6.7 | 7.8 | 3.39 | 13.7 |
| 10 | 3.9 | 2.0 | 7.5 | 8.8 | 1.95 | 11.5 |
| 16 | 5.0 | 2.0 | 8.6 | 10.0 | 1.24 | 9.5 |
| 25 | 6.4 | 2.0 | 9.9 | 11.6 | 0.795 | 7.9 |
| 35 | 7.7 | 2.0 | 11.1 | 13.0 | 0.565 | 6.8 |
| 50 | 9.2 | 2.0 | 12.5 | 14.6 | 0.393 | 5.9 |
| 70 | 11.0 | 2.0 | 14.2 | 16.6 | 0.277 | 5.0 |
| 95 | 12.5 | 2.2 | 16.0 | 18.7 | 0.210 | 4.5 |
| 120 | 14.2 | 2.2 | 17.6 | 20.6 | 0.164 | 4.0 |
| 150 | 15.8 | 2.2 | 19.1 | 22.3 | 0.132 | 3.7 |
| 185 | 17.5 | 2.4 | 20.9 | 24.4 | 0.108 | 3.4 |
| 240 | 20.1 | 2.4 | 23.7 | 27.5 | 0.0817 | 3.0 |
| 300 | 22.5 | 2.4 | 25.6 | 30.1 | 0.0654 | 2.7 |
| 400 | 25.8 | 2.6 | 29.2 | 34.2 | 0.0495 | 2.4 |

SINGLE CORE CABLES SHEATHED 1.8/3 kV - EN 50264-3-1



CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black if not elsewhere specified |
| Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 1.8/3 kV |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |











(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.5 | 1.5 | 1.3 | 0.8 | 5.7 | 6.7 | 13.7 | 21.8 |
| 2.5 | 1.95 | 1.3 | 0.8 | 6.0 | 7.0 | 8.21 | 18.8 |
| 4 | 2.5 | 1.3 | 0.8 | 6.5 | 7.6 | 5.09 | 16.2 |
| 6 | 3.0 | 1.3 | 0.8 | 7.0 | 8.1 | 3.39 | 14.4 |
| 10 | 3.9 | 1.5 | 0.8 | 8.2 | 9.6 | 1.95 | 12.8 |
| 16 | 5.0 | 1.5 | 0.8 | 9.2 | 10.8 | 1.24 | 10.7 |
| 25 | 6.4 | 1.8 | 1.0 | 11.5 | 13.4 | 0.795 | 10.3 |
| 35 | 7.7 | 1.8 | 1.0 | 12.7 | 14.9 | 0.565 | 8.9 |
| 50 | 9.2 | 1.8 | 1.0 | 14.1 | 16.5 | 0.393 | 7.8 |
| 70 | 11.0 | 1.8 | 1.0 | 15.8 | 18.5 | 0.277 | 6.7 |
| 95 | 12.5 | 2.2 | 1.0 | 18.0 | 21.0 | 0.210 | 6.5 |
| 120 | 14.2 | 2.2 | 1.0 | 19.6 | 22.9 | 0.164 | 6.1 |
| 150 | 15.8 | 2.2 | 1.2 | 21.4 | 25.1 | 0.132 | 5.8 |
| 185 | 17.5 | 2.4 | 1.2 | 23.4 | 27.4 | 0.108 | 5.6 |
| 240 | 20.1 | 2.4 | 1.2 | 25.9 | 30.3 | 0.0817 | 5.0 |
| 300 | 22.5 | 2.4 | 1.2 | 28.1 | 32.9 | 0.0654 | 4.5 |
| 400 | 25.8 | 2.6 | 1.4 | 32.0 | 37.4 | 0.0495 | 4.4 |

SINGLE CORE CABLES SHEATHED 3.6/6 kV - EN 50264-3-1

| | | | |
|---|-----------------------------|--|--|
|           | CABLE SPECIFICATIONS | Conductor Separator Insulation Core identification Sheath | Stranded tinned copper class 5 according to EN 60228 Semiconductor black tape Type crosslinked LSZH see table 1 Black if not elsewhere specified Type crosslinked LSZH see table 1 Black if not elsewhere specified |
| | TECHNICAL DATA | Operating voltage Operating temperature Minimum bending radius | 3.6/6 kV -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 5xØ |
| | FIRE PERFORMANCE | Fire propagation Smoke density Halogen-free Fumes | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 EN 61034-1/2 EN 50267-2-1/2 No corrosive and toxic fumes |

(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2.5 | 1.95 | 2.6 | 0.8 | 8.6 | 10.1 | 8.21 | 24.6 |
| 4 | 2.5 | 2.6 | 0.8 | 9.1 | 10.7 | 5.09 | 21.6 |
| 6 | 3.0 | 2.6 | 0.8 | 9.6 | 11.2 | 3.39 | 19.5 |
| 10 | 3.9 | 2.6 | 0.8 | 10.4 | 12.2 | 1.95 | 16.7 |
| 16 | 5.0 | 2.6 | 0.8 | 11.5 | 13.4 | 1.24 | 14.2 |
| 25 | 6.4 | 2.9 | 1.0 | 13.7 | 16.4 | 0.795 | 13.1 |
| 35 | 7.7 | 2.9 | 1.0 | 14.9 | 17.5 | 0.565 | 11.6 |
| 50 | 9.2 | 2.9 | 1.0 | 16.4 | 19.1 | 0.393 | 10.2 |
| 70 | 11.0 | 2.9 | 1.0 | 18.0 | 21.1 | 0.277 | 8.9 |
| 95 | 12.5 | 2.9 | 1.0 | 19.5 | 22.8 | 0.210 | 8.0 |
| 120 | 14.2 | 2.9 | 1.0 | 21.4 | 25.1 | 0.164 | 7.5 |
| 150 | 15.8 | 2.9 | 1.2 | 22.9 | 26.8 | 0.132 | 6.9 |
| 185 | 17.5 | 3.2 | 1.2 | 25.1 | 29.4 | 0.108 | 6.7 |
| 240 | 20.1 | 3.4 | 1.2 | 28.3 | 33.1 | 0.0817 | 6.4 |
| 300 | 22.5 | 3.4 | 1.2 | 30.6 | 35.8 | 0.0654 | 5.9 |
| 400 | 25.8 | 3.4 | 1.4 | 33.7 | 39.4 | 0.0495 | 5.2 |

MULTICORE UNSCREENED CABLES 300/500 V - EN 50264-3-2

| | | | |
|----------------------|-----------------------------|-------------------------------|---|
| | CABLE SPECIFICATIONS | Conductor | Stranded tinned copper class 5 according to EN 60228 |
| | | Separator | Eventual polyester color tape |
| | | Insulation | Type crosslinked LSZH see table 1 |
| | | Core identification | Black numbered if not elsewhere specified |
| | | Assembling | N° conductors + eventual filler and tape are assembled together |
| | | Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |
| | TECHNICAL DATA | Operating voltage | 300/500 V |
| | | Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| | | Minimum bending radius | 5xØ |
| | FIRE PERFORMANCE | Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | | EN 61034-1/2 | |
| Halogen-free | | EN 50267-2-1/2 | |
| Fumes | | No corrosive and toxic fumes | |


(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.6 | 5.3 | 6.2 | 20.0 | 15.0 |
| 4x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.6 | 6.1 | 7.2 | 20.0 | 15.0 |
| 7x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.7 | 7.5 | 8.7 | 20.0 | 15.0 |
| 9x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.7 | 9.1 | 10.6 | 20.0 | 15.0 |
| 12x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.7 | 9.8 | 11.5 | 20.0 | 15.0 |
| 19x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.8 | 11.7 | 13.7 | 20.0 | 15.0 |
| 24x1 | 1.25 | 0.4 | 2.0 | 2.4 | 1.0 | 14.1 | 16.5 | 20.0 | 15.0 |
| 32x1 | 1.25 | 0.4 | 2.0 | 2.4 | 1.0 | 15.5 | 18.2 | 20.0 | 15.0 |
| 37x1 | 1.25 | 0.4 | 2.0 | 2.4 | 1.0 | 16.1 | 18.9 | 20.0 | 15.0 |
| 40x1 | 1.25 | 0.4 | 2.0 | 2.4 | 1.0 | 16.7 | 19.6 | 20.0 | 15.0 |
| 4x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.7 | 7.3 | 8.6 | 13.7 | 14.0 |
| 7x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.7 | 8.7 | 10.2 | 13.7 | 14.0 |
| 9x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.8 | 10.9 | 12.7 | 13.7 | 14.0 |
| 12x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.8 | 11.8 | 13.8 | 13.7 | 14.0 |
| 19x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 1.0 | 14.2 | 16.6 | 13.7 | 14.0 |
| 24x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 1.0 | 16.6 | 19.5 | 13.7 | 14.0 |
| 32x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 1.2 | 18.7 | 21.9 | 13.7 | 14.0 |
| 37x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 1.2 | 19.5 | 22.8 | 13.7 | 14.0 |
| 4x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.7 | 8.3 | 9.8 | 8.21 | 13.0 |
| 7x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.8 | 10.2 | 11.9 | 8.21 | 13.0 |
| 9x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 1.0 | 12.9 | 15.1 | 8.21 | 13.0 |
| 12x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 1.0 | 13.9 | 16.3 | 8.21 | 13.0 |
| 19x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 1.0 | 16.3 | 19.1 | 8.21 | 13.0 |
| 24x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 1.2 | 19.6 | 22.9 | 8.21 | 13.0 |

MULTICORE SCREENED CABLES 300/500 V - EN 50264-3-2

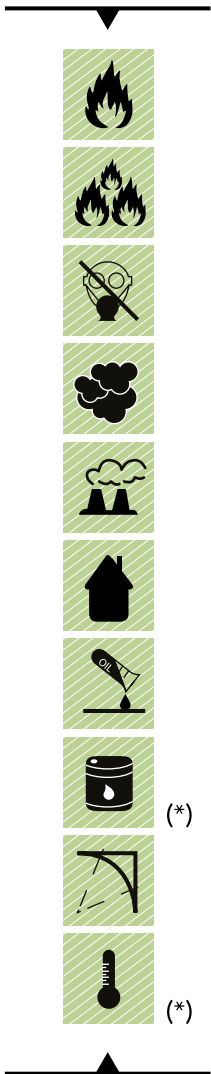

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual Polyester |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Screen | Tinned copper braid |
| Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 1



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Wire diameter of screen | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩ.km] |
| 2x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.16 | 0.6 | 6.0 | 7.1 | 20.0 | 15.0 |
| 4x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.16 | 0.7 | 7.0 | 8.2 | 20.0 | 15.0 |
| 7x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.16 | 0.7 | 8.2 | 9.6 | 20.0 | 15.0 |
| 9x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.21 | 0.8 | 10.2 | 11.9 | 20.0 | 15.0 |
| 12x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.21 | 0.8 | 10.9 | 12.7 | 20.0 | 15.0 |
| 19x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.26 | 1.0 | 13.2 | 15.4 | 20.0 | 15.0 |
| 24x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.26 | 1.0 | 15.2 | 17.8 | 20.0 | 15.0 |
| 32x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.26 | 1.0 | 16.6 | 19.4 | 20.0 | 15.0 |
| 37x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.26 | 1.0 | 17.2 | 20.1 | 20.0 | 15.0 |
| 40x1 | 1.25 | 0.4 | 2.0 | 2.4 | 0.26 | 1.2 | 18.2 | 21.3 | 20.0 | 15.0 |
| 4x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.16 | 0.7 | 8.0 | 9.4 | 13.7 | 14.0 |
| 7x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.21 | 0.7 | 9.6 | 11.3 | 13.7 | 14.0 |
| 9x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.21 | 1.0 | 12.1 | 14.2 | 13.7 | 14.0 |
| 12x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.21 | 1.0 | 13.0 | 15.2 | 13.7 | 14.0 |
| 19x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.26 | 1.0 | 15.3 | 17.9 | 13.7 | 14.0 |
| 24x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.26 | 1.2 | 18.1 | 21.2 | 13.7 | 14.0 |
| 32x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.26 | 1.2 | 19.8 | 23.2 | 13.7 | 14.0 |
| 37x1.5 | 1.5 | 0.5 | 2.4 | 2.9 | 0.26 | 1.2 | 20.5 | 24.0 | 13.7 | 14.0 |
| 4x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.21 | 0.7 | 9.2 | 10.8 | 8.21 | 13.0 |
| 7x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.21 | 0.8 | 11.1 | 13.0 | 8.21 | 13.0 |
| 9x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.26 | 1.0 | 13.9 | 16.3 | 8.21 | 13.0 |
| 12x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.26 | 1.0 | 15.0 | 17.5 | 8.21 | 13.0 |
| 19x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.26 | 1.2 | 17.8 | 20.8 | 8.21 | 13.0 |
| 24x2.5 | 1.95 | 0.5 | 2.9 | 3.4 | 0.26 | 1.2 | 20.6 | 24.1 | 8.21 | 13.0 |

MULTICORE UNSCREENED CABLES 0.6/1 KV - EN 50264-3-2

| | | | |
|-------------------------|-----------------------------|--|---|
| | CABLE SPECIFICATIONS | Conductor | Stranded tinned copper class 5 according to EN 60228 |
| | | Separator | Eventual polyester colored tape |
| | | Insulation | Type crosslinked LSZH see table 1 |
| | | Core identification | Black numbered if not elsewhere specified |
| | | Assembling | N° conductors + eventual filler and tape are assembled together |
| | | Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |
| | TECHNICAL DATA | Operating voltage | 0.6/1 kV |
| | | Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| | | Minimum bending radius | 5xØ |
| FIRE PERFORMANCE | Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 | |
| | Smoke density | EN 61034-1/2 | |
| | Halogen-free | EN 50267-2-1/2 | |
| | Fumes | No corrosive and toxic fumes | |

(*)see table 1




MULTICORE UNSCREENED CABLES 0.6/1 KV - EN 50264-3-2

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|-------------------------|------------------------------|---------------|------|--------------------------|-----------------------|------|----------------------------------|--------------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.7 | 7.2 | 9.0 | 13.7 | 21.0 |
| 3x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.7 | 7.7 | 9.5 | 13.7 | 21.0 |
| 4x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.7 | 8.5 | 10.5 | 13.7 | 21.0 |
| 2x2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 0.7 | 8.0 | 10.0 | 8.21 | 17.2 |
| 3x2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 0.7 | 8.5 | 10.5 | 8.21 | 17.2 |
| 4x2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 0.7 | 9.4 | 11.6 | 8.21 | 17.2 |
| 2x4 | 2.5 | 0.7 | 3.8 | 4.4 | 0.7 | 9.1 | 11.3 | 5.09 | 14.2 |
| 3x4 | 2.5 | 0.7 | 3.8 | 4.4 | 0.7 | 9.7 | 12.0 | 5.09 | 14.2 |
| 4x4 | 2.5 | 0.7 | 3.8 | 4.4 | 0.8 | 10.9 | 13.4 | 5.09 | 14.2 |
| 2x6 | 3.0 | 0.7 | 4.2 | 5.0 | 0.8 | 10.1 | 12.4 | 3.39 | 12.2 |
| 3x6 | 3.0 | 0.7 | 4.2 | 5.0 | 0.8 | 10.7 | 13.2 | 3.39 | 12.2 |
| 4x6 | 3.0 | 0.7 | 4.2 | 5.0 | 1.0 | 12.2 | 14.9 | 3.39 | 12.2 |
| 2x10 | 3.9 | 0.7 | 5.1 | 5.9 | 1.0 | 12.5 | 15.4 | 1.95 | 9.8 |
| 3x10 | 3.9 | 0.7 | 5.1 | 5.9 | 1.0 | 13.3 | 16.5 | 1.95 | 9.8 |
| 4x10 | 3.9 | 0.7 | 5.1 | 5.9 | 1.0 | 14.7 | 18.2 | 1.95 | 9.8 |
| 2x16 | 5.0 | 0.7 | 6.1 | 7.2 | 1.0 | 14.9 | 18.4 | 1.24 | 7.9 |
| 3x16 | 5.0 | 0.7 | 6.1 | 7.2 | 1.0 | 16.0 | 19.6 | 1.24 | 7.9 |
| 4x16 | 5.0 | 0.7 | 6.1 | 7.2 | 1.2 | 18.0 | 22.1 | 1.24 | 7.9 |
| 2x25 | 6.4 | 0.9 | 7.8 | 9.1 | 1.2 | 18.7 | 23.0 | 0.795 | 7.3 |
| 3x25 | 6.4 | 0.9 | 7.8 | 9.1 | 1.2 | 20.0 | 24.7 | 0.795 | 7.3 |
| 4x25 | 6.4 | 0.9 | 7.8 | 9.1 | 1.4 | 22.6 | 27.6 | 0.795 | 7.3 |
| 2x35 | 7.7 | 0.9 | 9.0 | 10.6 | 1.2 | 21.2 | 25.9 | 0.565 | 6.7 |
| 3x35 | 7.7 | 0.9 | 9.0 | 10.6 | 1.2 | 23.0 | 28.2 | 0.565 | 6.7 |
| 3x35 + 1x25 | 7.7 | 0.9 | 9.0 | 10.6 | 1.4 | 25.7 | 31.2 | 0.565 | 6.7 |
| 2x50 | 9.2 | 1.0 | 10.6 | 12.4 | 1.4 | 25.1 | 30.7 | 0.393 | 6.3 |
| 3x50 | 9.2 | 1.0 | 10.6 | 12.4 | 1.4 | 26.3 | 32.2 | 0.393 | 6.3 |
| 3x50 + 1x25 | 9.2 | 1.0 | 10.6 | 12.4 | 1.6 | 30.0 | 36.5 | 0.393 | 6.3 |

MULTICORE SCREENED CABLES 0.6/1 KV - EN 50264-3-2

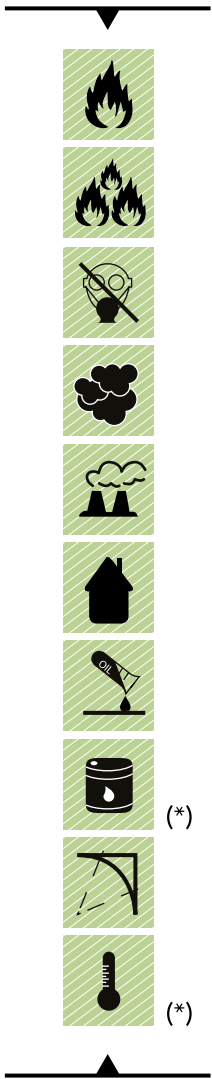

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Separator | Eventual polyester colored tape |
| Insulation | Type crosslinked LSZH see table 1 |
| Core identification | Black numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Screen | Tinned copper braid |
| Sheath | Type crosslinked LSZH see table 1 Black if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 0.6/1 kV |
| Operating temperature | -40°C ÷ +90°C see table 1 -25°C ÷ +90°C see table 1 |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |


(*)see table 1



MULTICORE SCREENED CABLES 0.6/1 KV - EN 50264-3-2

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Wire diameter of screen | Mean thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-------------------------|--------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.16 | 0.7 | 7.9 | 9.9 | 13.7 | 21.0 |
| 3x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.16 | 0.7 | 8.4 | 10.4 | 13.7 | 21.0 |
| 4x1.5 | 1.5 | 0.7 | 2.8 | 3.3 | 0.16 | 0.7 | 9.1 | 11.3 | 13.7 | 21.0 |
| 2x2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 0.16 | 0.7 | 8.7 | 10.7 | 8.21 | 17.2 |
| 3x2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 0.16 | 0.7 | 9.2 | 11.4 | 8.21 | 17.2 |
| 4x2.5 | 1.95 | 0.7 | 3.2 | 3.8 | 0.21 | 0.8 | 10.4 | 12.9 | 8.21 | 17.2 |
| 2x4 | 2.5 | 0.7 | 3.8 | 4.4 | 0.21 | 0.8 | 10.2 | 12.7 | 5.09 | 14.2 |
| 3x4 | 2.5 | 0.7 | 3.8 | 4.4 | 0.21 | 0.8 | 10.8 | 13.3 | 5.09 | 14.2 |
| 4x4 | 2.5 | 0.7 | 3.8 | 4.4 | 0.21 | 0.8 | 11.8 | 14.5 | 5.09 | 14.2 |
| 2x6 | 3.0 | 0.7 | 4.2 | 5.0 | 0.21 | 0.8 | 10.9 | 13.6 | 3.39 | 12.2 |
| 3x6 | 3.0 | 0.7 | 4.2 | 5.0 | 0.21 | 0.8 | 11.6 | 14.3 | 3.39 | 12.2 |
| 4x6 | 3.0 | 0.7 | 4.2 | 5.0 | 0.21 | 1.0 | 13.1 | 16.1 | 3.39 | 12.2 |
| 2x10 | 3.9 | 0.7 | 5.1 | 5.9 | 0.21 | 1.0 | 13.4 | 16.6 | 1.95 | 9.8 |
| 3x10 | 3.9 | 0.7 | 5.1 | 5.9 | 0.26 | 1.0 | 14.4 | 18.0 | 1.95 | 9.8 |
| 4x10 | 3.9 | 0.7 | 5.1 | 5.9 | 0.26 | 1.0 | 15.9 | 19.5 | 1.95 | 9.8 |
| 2x16 | 5.0 | 0.7 | 6.1 | 7.2 | 0.26 | 1.0 | 16.0 | 19.8 | 1.24 | 7.9 |
| 3x16 | 5.0 | 0.7 | 6.1 | 7.2 | 0.26 | 1.2 | 17.4 | 21.3 | 1.24 | 7.9 |
| 4x16 | 5.0 | 0.7 | 6.1 | 7.2 | 0.26 | 1.2 | 19.3 | 23.6 | 1.24 | 7.9 |
| 2x25 | 6.4 | 0.9 | 7.8 | 9.1 | 0.26 | 1.2 | 19.8 | 24.6 | 0.795 | 7.3 |
| 3x25 | 6.4 | 0.9 | 7.8 | 9.1 | 0.26 | 1.2 | 21.3 | 26.1 | 0.795 | 7.3 |
| 4x25 | 6.4 | 0.9 | 7.8 | 9.1 | 0.31 | 1.4 | 24.0 | 29.3 | 0.795 | 7.3 |
| 2x35 | 7.7 | 0.9 | 9.0 | 10.6 | 0.31 | 1.4 | 22.8 | 27.9 | 0.565 | 6.7 |
| 3x35 | 7.7 | 0.9 | 9.0 | 10.6 | 0.31 | 1.4 | 24.5 | 29.8 | 0.565 | 6.7 |
| 4x35 | 7.7 | 0.9 | 9.0 | 10.6 | 0.31 | 1.4 | 26.9 | 32.9 | 0.565 | 6.7 |
| 2x50 | 9.2 | 1.0 | 10.6 | 12.4 | 0.31 | 1.4 | 26.4 | 32.3 | 0.393 | 6.3 |
| 3x50 | 9.2 | 1.0 | 10.6 | 12.4 | 0.31 | 1.6 | 28.3 | 34.6 | 0.393 | 6.3 |
| 3x50 + 1x25 | 9.2 | 1.0 | 10.6 | 12.4 | 0.31 | 1.6 | 31.5 | 38.2 | 0.393 | 6.3 |

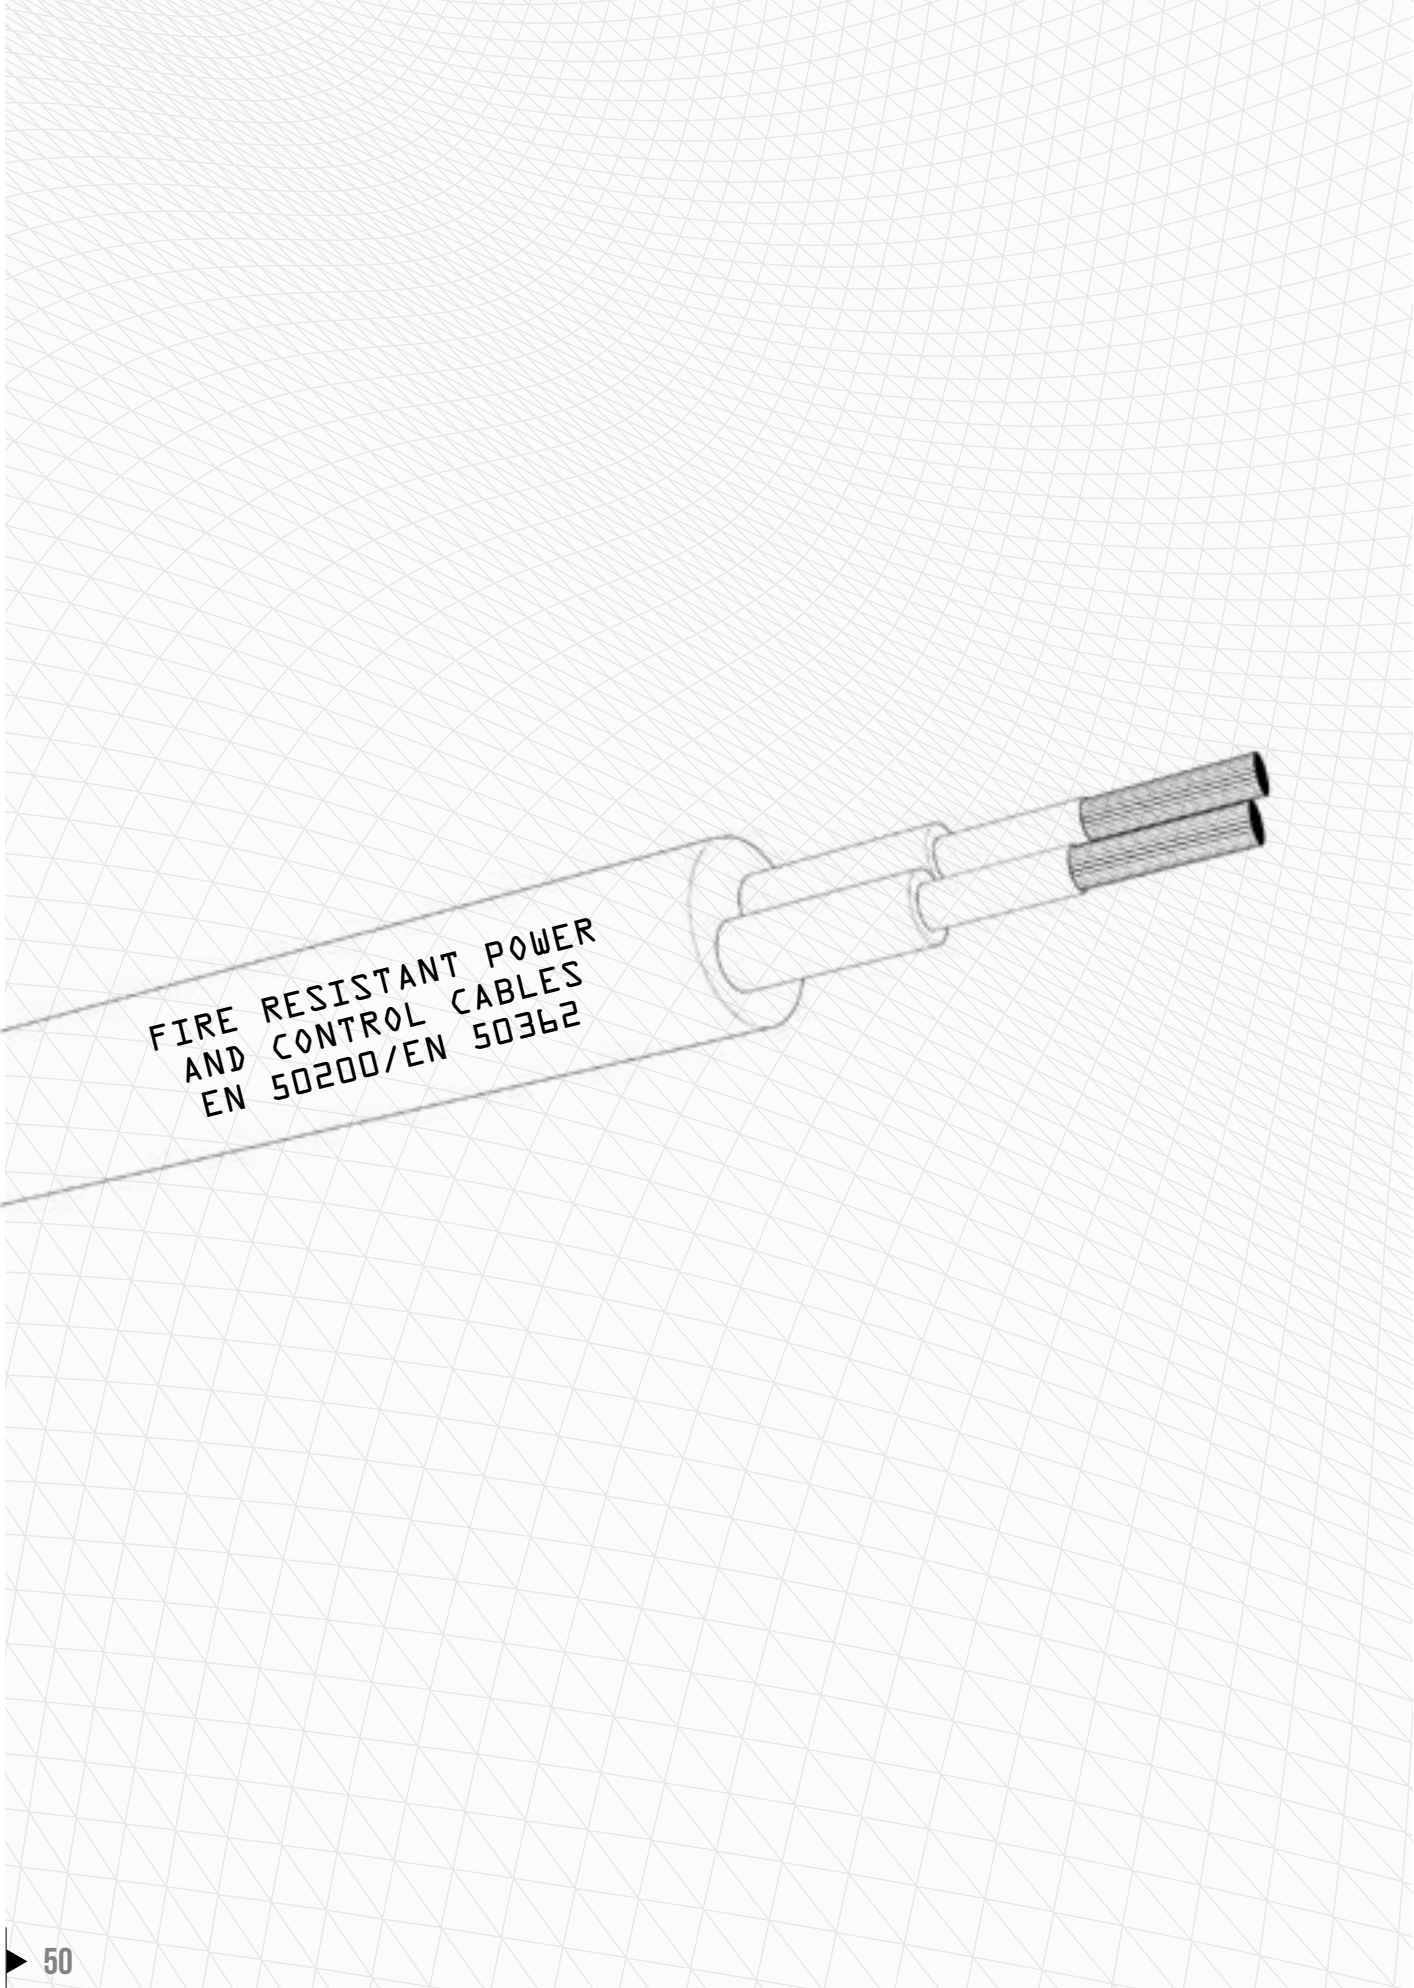

FIRE RESISTANT POWER AND CONTROL CABLES

HAVING SPECIAL FIRE PERFORMANCE

Standard Reference

EN 50200; EN 50362; EN 50264; EN 50305; EN 50355; EN 50343; EN 45545-2 HL3; UNI CEI 11170-3 LR4; DIN 5510-2; BS 6853; NFPA 130

CODE DESIGNATIONS

Insulation System (EN 50264-2-1 and 2-2)

| | |
|---|--------------------|
| EI 101 Low Temperature Resistant, Oil Resistant..... | Code Designation C |
| EI 102 Extra Low Temperature Resistant, Oil Resistant | Code Designation F |
| EI 103 Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation J |
| EI 104 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant..... | Code Designation M |
| EI 105 Extra Low Temperature Resistant, Non Oil Resistant | Code Designation O |


Insulation System (EN 50264-3-1 and 3-2)

| | |
|---|--------------------|
| EI 106 Low Temperature Resistant, Oil Resistant | Code Designation C |
| EI 107 Extra Low Temperature Resistant, Oil Resistant | Code Designation F |
| EI 108 Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation J |
| EI 109 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant..... | Code Designation M |
| EI 110 Extra Low Temperature Resistant, Non Oil Resistant | Code Designation O |

Sheath Type (EN 50264-2-1, EN 50264-2-2, EN 50264-3-1 and EN 50264-3-2)

| | |
|---|--------------------|
| EM 101 Low Temperature Resistant, Oil Resistant..... | Code Designation C |
| EM 102 Extra Low Temperature Resistant, Oil Resistant..... | Code Designation F |
| EM 103 Low Temperature Resistant, Extra Oil and Fuel Resistant | Code Designation J |
| EM 104 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant..... | Code Designation M |

SINGLE CORE CABLES UNSHEATHED 0.6/1 KV - EN 50200/EN 50362

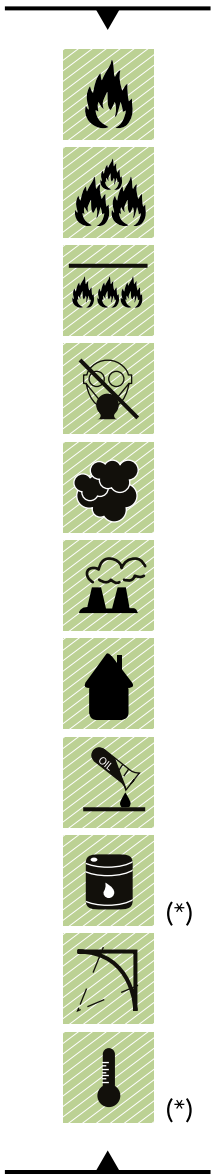

CABLE SPECIFICATIONS

| | |
|----------------------------|--|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Fire protection | Glass-mica tape |
| Insulation | Type crosslinked LSZH see table 2 |
| Core identification | Red if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating Voltage | 0.6/1 kV |
| Operating temperature | -40°C ÷ +90°C see table 2 -25°C ÷ +90°C see table 2 |
| Minimum bending radius | 6xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Fire resistant | EN 50200 / EN 50362 PH 90 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 2



SINGLE CORE CABLES UNSHEATHED 0.6/1 KV - EN 50200/EN 50362

MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | External diameter Ø | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|-------------------------|------------------------------|------------------------|----------------------------------|--------------------------------|
| | | | max. | max. | min. |
| [mm ²] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1.0 | 1.25 | 0.8 | 3.5 | 20.0 | 65 |
| 1.5 | 1.5 | 0.8 | 3.8 | 13.7 | 55 |
| 2.5 | 1.95 | 0.8 | 4.2 | 8.21 | 50 |
| 4 | 2.5 | 0.8 | 4.9 | 5.09 | 40 |
| 6 | 3.0 | 0.9 | 5.7 | 3.39 | 35 |
| 10 | 3.9 | 1.1 | 7.1 | 1.95 | 30 |
| 16 | 5.0 | 1.1 | 8.8 | 1.24 | 30 |
| 25 | 6.4 | 1.3 | 10.3 | 0.795 | 30 |
| 35 | 7.7 | 1.3 | 11.8 | 0.565 | 25 |
| 50 | 9.2 | 1.5 | 13.8 | 0.393 | 25 |
| 70 | 11.0 | 1.5 | 15.8 | 0.277 | 20 |
| 95 | 12.5 | 1.6 | 17.7 | 0.210 | 20 |
| 120 | 14.2 | 1.6 | 19.6 | 0.164 | 20 |
| 150 | 15.8 | 1.9 | 22.0 | 0.132 | 15 |
| 185 | 17.5 | 1.9 | 24.0 | 0.108 | 15 |

MULTICORE UNSCREENED CABLES 300/500 V - EN 50200 / EN 50362

| | | | |
|--|-----------------------------|---|---|
| | CABLE SPECIFICATIONS | Conductor Fire protection Insulation Core identification Assembling Sheath | Stranded tinned copper class 5 according to EN 60228 Glass-mica tape Type crosslinked LSZH see table 2 Black numbered if not elsewhere specified N° conductors + eventual filler and tape are assembled together Type crosslinked LSZH see table 2 Red if not elsewhere specified |
| | TECHNICAL DATA | Operating Voltage Operating temperature Minimum bending radius | 300/500 V -40°C ÷ +90°C see table 2 -25°C ÷ +90°C see table 2 5xØ |
| | FIRE PERFORMANCE | Fire propagation Fire resistant Smoke density Halogen-free Fumes | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 EN 50200 / EN 50362 PH 90 EN 61034-1/2 EN 50267-2-1/2 No corrosive and toxic fumes |

(*)see table 2



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Mean thickness of sheath | External diameter | Resistance of conductor | Insulation resistance |
|------------------------------|-------------------------|------------------------------|--------------------------|-------------------|-------------------------|-----------------------|
| | | | | Ø | @20°C | @20°C |
| | | | | max. | max. | min. |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x1 | 1.25 | 0.6 | 1.4 | 9.5 | 20.0 | 140 |
| 2x1.5 | 1.5 | 0.7 | 1.4 | 10.3 | 13.7 | 120 |
| 2x2.5 | 1.95 | 0.8 | 1.4 | 11.7 | 8.21 | 90 |
| 2x4 | 2.5 | 0.8 | 1.4 | 12.7 | 5.09 | 80 |
| 3x1 | 1.25 | 0.6 | 1.4 | 9.9 | 20.0 | 140 |
| 3x1.5 | 1.5 | 0.7 | 1.4 | 10.8 | 13.7 | 120 |
| 3x2.5 | 1.95 | 0.8 | 1.4 | 12.4 | 8.21 | 90 |
| 3x4 | 2.5 | 0.8 | 1.4 | 13.6 | 5.09 | 80 |
| 4x1 | 1.25 | 0.6 | 1.4 | 10.7 | 20.0 | 140 |
| 4x1.5 | 1.5 | 0.7 | 1.4 | 11.9 | 13.7 | 120 |
| 4x2.5 | 1.95 | 0.8 | 1.4 | 13.6 | 8.21 | 90 |
| 4x4 | 2.5 | 0.8 | 1.4 | 15.0 | 5.09 | 80 |

SINGLE AND MULTICORE SCREENED CABLES WITH SHEATH 300/500 V - EN 50200 / EN 50362



CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper class 5 according to EN 60228 |
| Fire protection | Glass-mica tape |
| Insulation | Type crosslinked LSZH see table 2 |
| Core identification | Black numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Screen | Tinned copper braid |
| Sheath | Type crosslinked LSZH see table 2 Red if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating Voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C see table 2 -25°C ÷ +90°C see table 2 |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE



| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Fire resistant | EN 50200 / EN 50362 PH 90 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 2



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Wire diameter of screen max. | Mean thickness of sheath [mm] | External diameter Ø max. | Resistance of conductor @20°C max. | Insulation resistance @20°C min. |
|------------------------------|-------------------------|------------------------------|---------------------------------|----------------------------------|--------------------------------|--|--|
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1x1 | 1.25 | 0.6 | 0.16 | 1.4 | 7.0 | 20.0 | 140 |
| 1x1.5 | 1.5 | 0.7 | 0.16 | 1.4 | 7.6 | 13.7 | 120 |
| 1x2.5 | 1.95 | 0.8 | 0.21 | 1.4 | 8.4 | 8.21 | 90 |
| 1x4 | 2.5 | 0.8 | 0.21 | 1.4 | 9.0 | 5.09 | 80 |
| 2x0.75 | 1.15 | 0.6 | 0.16 | 1.4 | 8.9 | 26.7 | 150 |
| 2x1 | 1.25 | 0.6 | 0.16 | 1.4 | 10.5 | 20.0 | 140 |
| 2x1.5 | 1.5 | 0.7 | 0.16 | 1.4 | 11.3 | 13.7 | 120 |
| 2x2.5 | 1.95 | 0.8 | 0.21 | 1.4 | 12.9 | 8.21 | 90 |
| 2x4 | 2.5 | 0.8 | 0.21 | 1.4 | 14.0 | 5.09 | 80 |
| 3x1 | 1.25 | 0.6 | 0.16 | 1.4 | 10.9 | 20.0 | 140 |
| 3x1.5 | 1.5 | 0.7 | 0.16 | 1.4 | 11.8 | 13.7 | 120 |
| 3x2.5 | 1.95 | 0.8 | 0.21 | 1.4 | 13.7 | 8.21 | 90 |
| 3x4 | 2.5 | 0.8 | 0.21 | 1.4 | 15.0 | 5.09 | 80 |
| 4x1 | 1.25 | 0.6 | 0.16 | 1.4 | 11.7 | 20.0 | 140 |
| 4x1.5 | 1.5 | 0.7 | 0.16 | 1.4 | 12.9 | 13.7 | 120 |
| 4x2.5 | 1.95 | 0.8 | 0.21 | 1.4 | 15.0 | 8.21 | 90 |
| 4x4 | 2.5 | 0.8 | 0.21 | 1.4 | 16.5 | 5.09 | 80 |
| 6x1 | 1.25 | 0.6 | 0.16 | 1.4 | 13.3 | 20.0 | 140 |
| 6x1.5 | 1.5 | 0.7 | 0.16 | 1.4 | 14.6 | 13.7 | 120 |
| 6x2.5 | 1.95 | 0.8 | 0.21 | 1.4 | 17.0 | 8.21 | 90 |
| 6x4 | 2.5 | 0.8 | 0.21 | 1.5 | 18.6 | 5.09 | 80 |

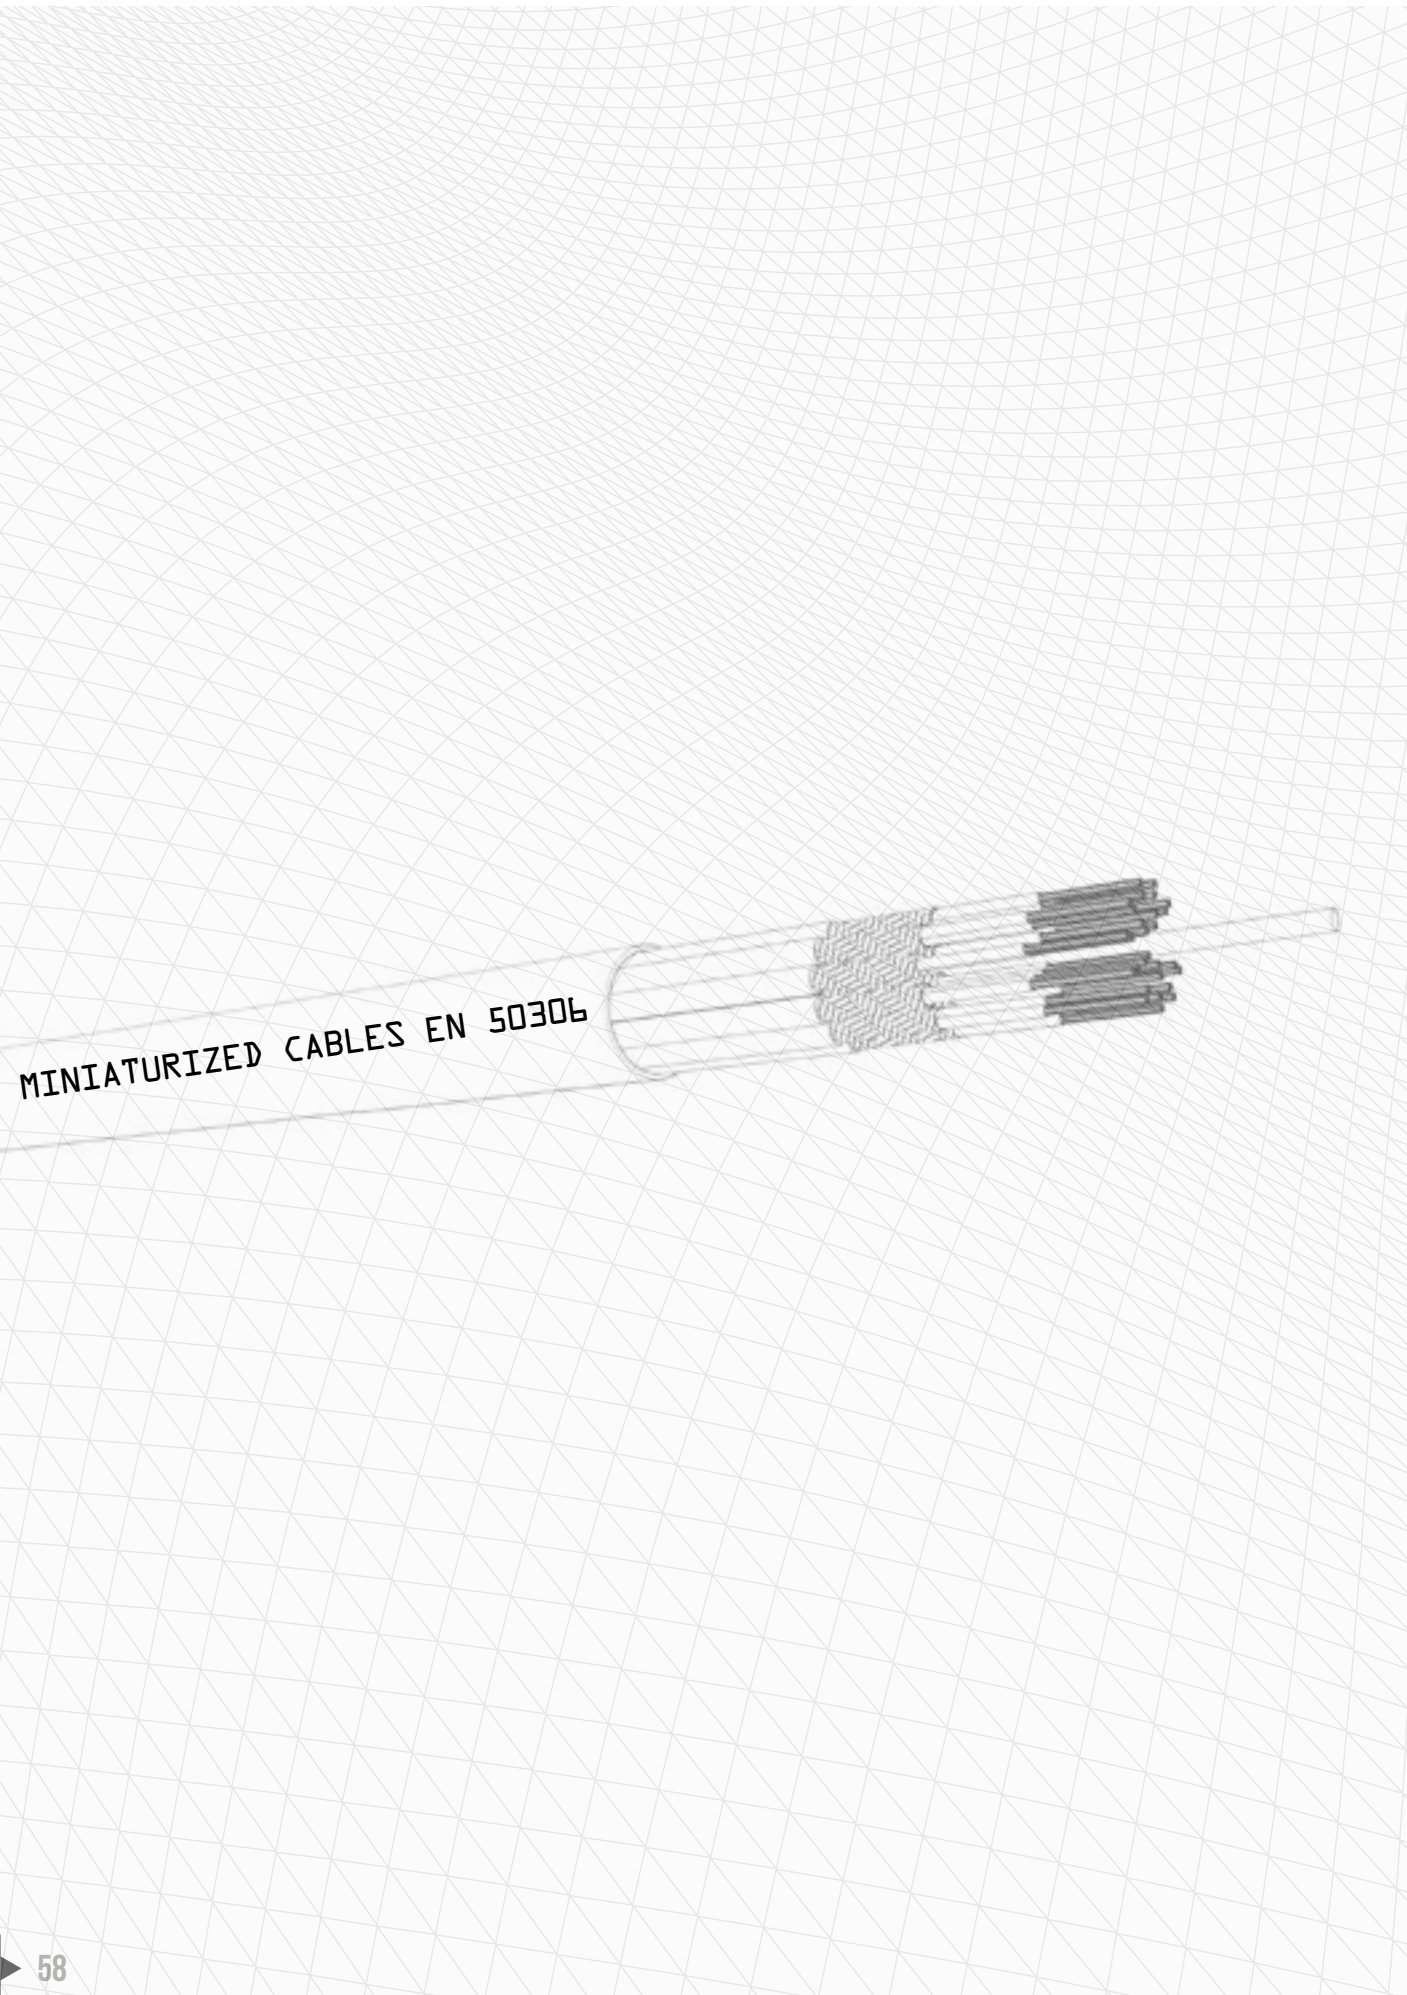

MINIATURIZED CABLES

HAVING SPECIAL FIRE PERFORMANCE

THIN WALL

Standard Reference

EN 50306; EN 50264; EN 50305; EN 50355; EN 50343; EN 45545-2 HL3; UNI CEI 11170-3 LR4; DIN 5510-2; BS 6853; NFPA 130

CODE DESIGNATIONS


Insulation System (EN 50306-1, EN 50306-2)

- Low Temperature Resistant, Oil Resistant..... Code Designation C
- Extra Low Temperature Resistant, Oil Resistant Code Designation F
- Low Temperature Resistant, Extra Oil and Fuel Resistant..... Code Designation J
- Extra Low Temperature Resistant, Extra Oil and Fuel Resistant Code Designation M

Sheath Type (EN 50264-1, EN 50306-3, EN 50306-4)

- EM 101 Low Temperature Resistant, Oil Resistant..... Code Designation C
- EM 102 Extra Low Temperature Resistant, Oil Resistant Code Designation F
- EM 103 Low Temperature Resistant, Extra Oil and Fuel Resistant Code Designation J
- EM 104 Extra Low Temperature Resistant, Extra Oil and Fuel Resistant..... Code Designation M

SINGLE CORE CABLES UNSHEATHED 300/500 V - EN 50306-2

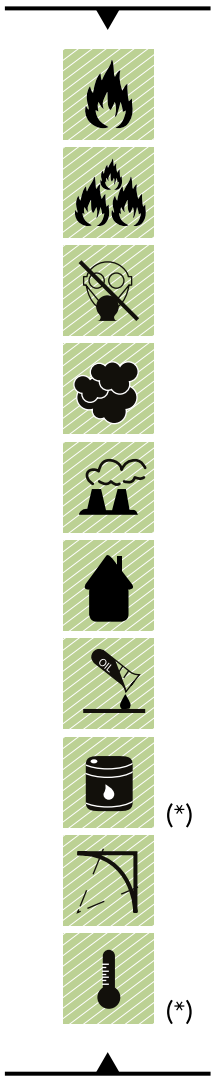

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper according to EN 60228 configuration according to table A |
| Insulation | Double layer of olefinic thermoplastic mixture |
| Core identification | White if not elsewhere specified |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +105°C see table 3 -25°C ÷ +105°C see table 3 |
| Minimum bending radius | 4xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 3




MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Number and diameter of strands | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|--------------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [mm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 0.5 | 0.85 | 0.18 | 0.8 | 0.95 | 19x0.18 | 1.15 | 1.45 | 40.1 | 600 |
| 0.75 | 1.05 | 0.18 | 1.0 | 1.15 | 37x0.16 (a) | 1.35 | 1.65 | 26.7 | 500 |
| 1.0 | 1.2 | 0.18 | 1.1 | 1.3 | 37x0.18 (a) | 1.45 | 1.8 | 20.0 | 500 |
| 1.5 | 1.55 | 0.22 | 1.45 | 1.65 | 37x0.23 (a) | 1.95 | 2.3 | 13.7 | 400 |
| 2.5 | 2.0 | 0.28 | 1.85 | 2.15 | 37x0.30 (a) | 2.5 | 2.85 | 8.21 | 400 |

(a) Also formation with 19 strands is possible

SINGLE AND MULTICORE SCREENED CABLES 300/500 V - EN 50306-3

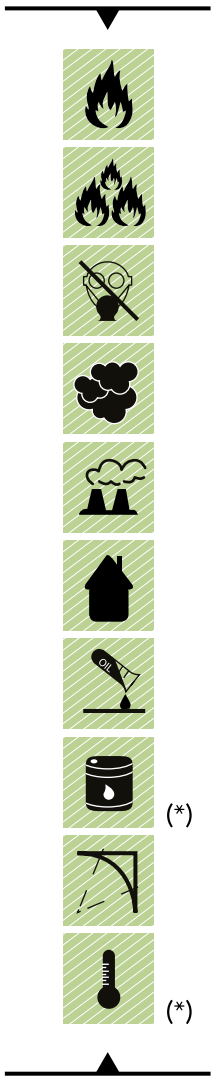

CABLE SPECIFICATIONS

| | |
|----------------------------|--|
| Conductor | Stranded tinned copper according to EN 60228 configuration according to single core unsheathed |
| Insulation | Double layer of olefinic thermoplastic mixture |
| Core identification | White if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Screen | Tinned copper braid |
| Sheath | Type crosslinked LSZH see table 3 Black if not elsewhere specified Thickness and outer diameter according to cable class, E exposed, P protected: See table E |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 300/500 V |
| Operating temperature | -25°C ÷ +105°C see table 3 (single core) -40°C ÷ +105°C see table 3 (single core) -25°C ÷ +90°C see table 3 (multicore) -40°C ÷ +90°C see table 3 (multicore) |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |


(*)see table 3



MAIN FEATURES

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-----------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.2 | 2.3 | 2.8 | 40.1 | 600 |
| 2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.2 | 3.5 | 4.3 | 40.1 | 600 |
| 3x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.2 | 3.7 | 4.5 | 40.1 | 600 |
| 4x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.2 | 4.0 | 5.0 | 40.1 | 600 |
| 1x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.2 | 2.5 | 3.0 | 26.7 | 500 |
| 2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.2 | 3.9 | 4.7 | 26.7 | 500 |
| 3x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.2 | 4.0 | 5.0 | 26.7 | 500 |
| 4x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.2 | 4.5 | 5.5 | 26.7 | 500 |
| 1x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.2 | 2.7 | 3.2 | 20.0 | 500 |
| 2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.2 | 4.2 | 5.2 | 20.0 | 500 |
| 3x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.2 | 4.5 | 5.5 | 20.0 | 500 |
| 4x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.2 | 5.0 | 6.0 | 20.0 | 500 |
| 1x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.2 | 3.1 | 3.6 | 13.7 | 400 |
| 2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.2 | 5.1 | 6.1 | 13.7 | 400 |
| 3x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.2 | 5.4 | 6.4 | 13.7 | 400 |
| 4x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.2 | 6.0 | 7.0 | 13.7 | 400 |
| 1x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.2 | 3.6 | 4.4 | 13.7 | 400 |
| 2x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.2 | 6.4 | 7.4 | 13.7 | 400 |
| 3x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.2 | 6.8 | 7.8 | 13.7 | 400 |
| 4x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.2 | 7.5 | 8.5 | 13.7 | 400 |

MULTICORE UNSCREENED CABLES 300/500 V - EN 50306-4

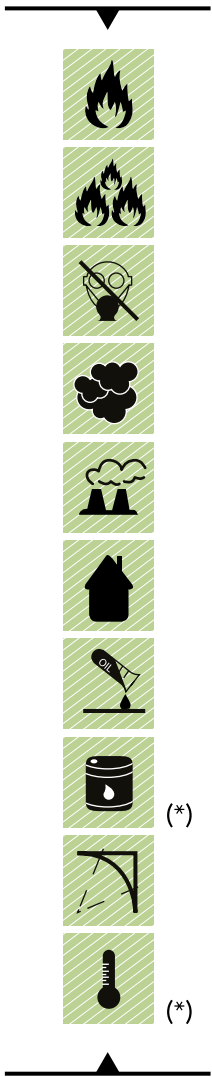

CABLE SPECIFICATIONS

| | |
|----------------------------|---|
| Conductor | Stranded tinned copper according to EN 60228 configuration according to single core unsheathed |
| Insulation | Double layer of olefinic thermoplastic mixture Thickness and outer diameter: according to single core unsheathed |
| Core identification | White numbered if not elsewhere specified |
| Assembling | N° conductors + eventual filler and tape are assembled together |
| Sheath | Type crosslinked LSZH see table 3 Black if not elsewhere specified Thickness and outer diameter according to cable class, E exposed, P protected: |

TECHNICAL DATA

| | |
|-------------------------------|--|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C see table 3 -25°C ÷ +90°C see table 3 |
| Minimum bending radius | 4xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)see table 3



MAIN FEATURES CLASS E

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-----------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 4x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 5.5 | 6.5 | 40.1 | 600 |
| 5x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 5.8 | 6.9 | 40.1 | 600 |
| 7x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 6.3 | 7.3 | 40.1 | 600 |
| 9x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 6.3 | 7.3 | 40.1 | 600 |
| 13x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 8.3 | 9.3 | 40.1 | 600 |
| 19x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 9.0 | 10.2 | 40.1 | 600 |
| 37x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 12.3 | 13.5 | 40.1 | 600 |
| 4x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 6.0 | 7.0 | 26.7 | 500 |
| 7x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 6.9 | 7.9 | 26.7 | 500 |
| 13x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 9.1 | 10.3 | 26.7 | 500 |
| 19x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 10.0 | 11.2 | 26.7 | 500 |
| 37x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 13.2 | 14.4 | 26.7 | 500 |
| 48x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 14.8 | 16.4 | 26.7 | 500 |
| 4x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 6.3 | 7.3 | 20.0 | 500 |
| 7x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 7.3 | 8.3 | 20.0 | 500 |
| 13x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 9.7 | 10.9 | 20.0 | 500 |
| 19x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 10.7 | 11.9 | 20.0 | 500 |
| 37x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 14.0 | 15.6 | 20.0 | 500 |
| 4x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 7.4 | 8.4 | 13.7 | 400 |
| 7x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 8.6 | 9.8 | 13.7 | 400 |
| 13x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 11.7 | 12.9 | 13.7 | 400 |
| 19x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 13.0 | 14.2 | 13.7 | 400 |
| 37x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 17.2 | 18.8 | 13.7 | 400 |
| 2x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 7.7 | 8.7 | 8.21 | 400 |
| 3x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 8.1 | 9.1 | 8.21 | 400 |
| 4x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 8.8 | 10.0 | 8.21 | 400 |

MAIN FEATURES CLASS P

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-----------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩ.km] |
| 4x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.1 | 5.1 | 40.1 | 600 |
| 5x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.4 | 5.5 | 40.1 | 600 |
| 7x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.9 | 5.9 | 40.1 | 600 |
| 9x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.9 | 5.9 | 40.1 | 600 |
| 13x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 7.3 | 8.3 | 40.1 | 600 |
| 19x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 8.1 | 9.1 | 40.1 | 600 |
| 37x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 10.8 | 12.0 | 40.1 | 600 |
| 4x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 4.6 | 5.6 | 26.7 | 500 |
| 7x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 5.5 | 6.5 | 26.7 | 500 |
| 13x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 8.2 | 9.2 | 26.7 | 500 |
| 19x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 9.0 | 10.2 | 26.7 | 500 |
| 37x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 12.2 | 13.4 | 26.7 | 500 |
| 48x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 13.9 | 15.5 | 26.7 | 500 |
| 4x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.42 | 4.9 | 5.9 | 20.0 | 500 |
| 7x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.42 | 6.0 | 7.0 | 20.0 | 500 |
| 13x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 8.7 | 9.9 | 20.0 | 500 |
| 19x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 9.8 | 11.0 | 20.0 | 500 |
| 37x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 13.3 | 14.5 | 20.0 | 500 |
| 4x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.42 | 6.0 | 7.0 | 13.7 | 400 |
| 7x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 7.7 | 8.7 | 13.7 | 400 |
| 13x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 10.7 | 11.9 | 13.7 | 400 |
| 19x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 12.0 | 13.2 | 13.7 | 400 |
| 37x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 16.2 | 17.8 | 13.7 | 400 |
| 2x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 6.7 | 7.7 | 8.21 | 400 |
| 3x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 7.7 | 8.1 | 8.21 | 400 |
| 4x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 7.9 | 8.9 | 8.21 | 400 |

SINGLE AND MULTICORE SCREENED CABLES 300/500 V - EN 50306-4

| | | | |
|---------------------------|-----------------------------|--|--|
| | CABLE SPECIFICATIONS | Conductor | Stranded tinned copper according to EN 60228 configuration according to single core |
| | | Insulation | Double layer of olefinic thermoplastic mixture Thickness and outer diameter: see single core |
| | | Core identification | White numbered if not elsewhere specified |
| | | Assembling | N° conductors + eventual filler and tape are assembled together |
| | | Screen | Tinned copper braid |
| | TECHNICAL DATA | Operating voltage | 300/500 V |
| | | Operating temperature | -40°C ÷ +90°C see table 3 -25°C ÷ +90°C see table 3 |
| | | Minimum bending radius | 5xØ |
| | FIRE PERFORMANCE | Fire propagation | EN 60332-1-2 EN 50305 9.1.2 EN 50266-2-5 EN 50266-2-4 |
| | | Smoke density | EN 61034-1/2 |
| Halogen-free Fumes | | EN 50267-2-1/2 No corrosive and toxic fumes | |

(*)see table 3



MAIN FEATURES CLASS E


| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-----------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 3.6 | 4.6 | 40.1 | 600 |
| 2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 5.5 | 6.5 | 40.1 | 600 |
| 3x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 5.7 | 6.7 | 40.1 | 600 |
| 4x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 6.1 | 7.1 | 40.1 | 600 |
| 6x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 6.9 | 7.9 | 40.1 | 600 |
| 8x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 7.5 | 8.5 | 40.1 | 600 |
| 1x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 3.8 | 4.8 | 26.7 | 500 |
| 2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 5.9 | 6.9 | 26.7 | 500 |
| 3x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 6.2 | 7.2 | 26.7 | 500 |
| 4x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 6.5 | 7.5 | 26.7 | 500 |
| 6x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 7.5 | 8.5 | 26.7 | 500 |
| 8x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 8.2 | 9.2 | 26.7 | 500 |
| 1x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 3.8 | 4.8 | 20.0 | 500 |
| 2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 6.2 | 7.2 | 20.0 | 500 |
| 3x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 6.5 | 7.5 | 20.0 | 500 |
| 4x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 6.9 | 7.9 | 20.0 | 500 |
| 6x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 8.0 | 9.0 | 20.0 | 500 |
| 8x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 8.6 | 9.8 | 20.0 | 500 |
| 1x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 4.4 | 5.4 | 13.7 | 400 |
| 2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 7.1 | 8.1 | 13.7 | 400 |
| 3x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 7.4 | 8.4 | 13.7 | 400 |
| 4x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 8.0 | 9.0 | 13.7 | 400 |
| 6x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 9.2 | 10.4 | 13.7 | 400 |
| 8x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 10.2 | 11.4 | 13.7 | 400 |
| 1x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 5.0 | 6.0 | 8.21 | 400 |
| 2x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 8.3 | 9.3 | 8.21 | 400 |
| 3x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 8.6 | 9.8 | 8.21 | 400 |
| 4x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 1.0 | 9.4 | 10.6 | 8.21 | 400 |

SINGLE AND MULTICORE SCREENED CABLES 300/500 V - EN 50306-4

MAIN FEATURES CLASS P

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|-------------------------|------------------------------|---------------|------|-----------------------------|-----------------------|------|----------------------------------|--------------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 1x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.28 | 2.2 | 2.6 | 40.1 | 600 |
| 2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.1 | 5.1 | 40.1 | 600 |
| 3x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.3 | 5.3 | 40.1 | 600 |
| 4x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 4.7 | 5.7 | 40.1 | 600 |
| 6x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 5.5 | 6.5 | 40.1 | 600 |
| 8x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.42 | 6.0 | 7.0 | 40.1 | 600 |
| 1x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.28 | 2.5 | 3.1 | 26.7 | 500 |
| 2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 4.5 | 5.5 | 26.7 | 500 |
| 3x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 4.7 | 5.7 | 26.7 | 500 |
| 4x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 5.2 | 6.2 | 26.7 | 500 |
| 6x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 6.1 | 7.1 | 26.7 | 500 |
| 8x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.42 | 6.6 | 7.6 | 26.7 | 500 |
| 1x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.28 | 2.8 | 3.3 | 20.0 | 500 |
| 2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.42 | 4.7 | 5.7 | 20.0 | 500 |
| 3x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.42 | 5.1 | 6.0 | 20.0 | 500 |
| 4x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.42 | 5.5 | 6.5 | 20.0 | 500 |
| 6x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.42 | 6.6 | 7.6 | 20.0 | 500 |
| 8x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 7.7 | 8.7 | 20.0 | 500 |
| 1x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.28 | 3.1 | 3.7 | 13.7 | 400 |
| 2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.42 | 5.7 | 6.7 | 13.7 | 400 |
| 3x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.42 | 6.0 | 7.0 | 13.7 | 400 |
| 4x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.42 | 6.6 | 7.6 | 13.7 | 400 |
| 6x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 8.3 | 9.3 | 13.7 | 400 |
| 8x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 8.9 | 10.1 | 13.7 | 400 |
| 1x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 4 | 4.4 | 8.21 | 400 |
| 2x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 7.3 | 8.3 | 8.21 | 400 |
| 3x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 7.7 | 8.7 | 8.21 | 400 |
| 4x2.5 | 2.0 | 0.28 | 2.5 | 2.85 | 0.56 | 8.4 | 9.6 | 8.21 | 400 |

MULTIPAIRS CABLES INDIVIDUALLY SCREENED AND SHEATHED WITH AN OVERALL SHEATH 300/500 V - EN 50306-4

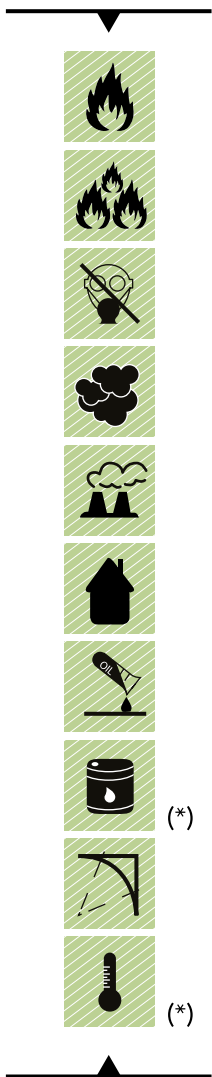

CABLE SPECIFICATIONS

Conductor

Stranded tinned copper according to EN 60228 configuration according to single core

Insulation

Double layer of olefinic thermoplastic mixture Thickness and outer diameter: see single core

Core identification

White numbered if not elsewhere specified

Assembling

2 conductors + eventual filler and tape are twisted together

Pair

Each pair screened and sheathed

Assembling

N° pairs + eventual filler and tape are assembled together

Sheath

Type crosslinked LSZH see table 3
Black if not elsewhere specified
Thickness and outer diameter according to cable class, E exposed, P protected

TECHNICAL DATA

Operating voltage

300/500 V

Operating temperature

-40°C ÷ +90°C see table 3
-25°C ÷ +90°C see table 3

Minimum bending radius

5xØ

FIRE PERFORMANCE

Fire propagation

EN 60332-1-2
EN 50305 9.1.2
EN 50266-2-5
EN 50266-2-4

Smoke density

EN 61034-1/2

Halogen-free

EN 50267-2-1/2

Fumes

No corrosive and toxic fumes

(*)see table 3



**MULTIPAIRS CABLES INDIVIDUALLY SCREENED AND SHEATHED
WITH AN OVERALL SHEATH 300/500 V - EN 50306-4**



MAIN FEATURES CLASS E

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-----------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩxkm] |
| 2x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 10.1 | 11.3 | 40.1 | 600 |
| 3x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 10.8 | 12.0 | 40.1 | 600 |
| 4x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 11.8 | 13.0 | 40.1 | 600 |
| 7x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 1.0 | 13.9 | 15.5 | 40.1 | 600 |
| 2x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 10.9 | 12.1 | 26.7 | 500 |
| 3x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 11.6 | 12.8 | 26.7 | 500 |
| 4x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 12.8 | 14.0 | 26.7 | 500 |
| 7x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 1.0 | 15.1 | 16.7 | 26.7 | 500 |
| 2x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 11.3 | 12.5 | 20.0 | 500 |
| 3x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 12.0 | 13.2 | 20.0 | 500 |
| 4x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 13.2 | 14.4 | 20.0 | 500 |
| 7x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 1.0 | 15.7 | 17.3 | 20.0 | 500 |
| 2x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 13.3 | 14.5 | 13.7 | 400 |
| 3x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 14.0 | 15.6 | 13.7 | 400 |
| 4x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 15.5 | 17.1 | 13.7 | 400 |
| 7x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 1.0 | 18.7 | 20.3 | 13.7 | 400 |

**▶ MULTI-PAIRS CABLES INDIVIDUALLY SCREENED AND SHEATHED
WITH AN OVERALL SHEATH 300/500 V - EN 50306-4**

MAIN FEATURES CLASS P

| Nominal cross-sectional area | Conductor diameter Ø | Mean thickness of insulation | Core diameter | | Minimum thickness of sheath | Overall diameter Ø | | Resistance of conductor @20°C | Insulation resistance @20°C |
|------------------------------|----------------------|------------------------------|---------------|------|-----------------------------|--------------------|------|-------------------------------|-----------------------------|
| | | | min. | max. | | min. | max. | | |
| [nxmm ²] | [mm] | [mm] | [mm] | mm] | [mm] | [mm] | [mm] | [Ω/km] | [MΩ.km] |
| 2x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 9.0 | 10.2 | 40.1 | 600 |
| 3x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 9.6 | 10.8 | 40.1 | 600 |
| 4x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 10.7 | 11.9 | 40.1 | 600 |
| 7x2x0.5 | 0.85 | 0.18 | 1.15 | 1.45 | 0.56 | 13.0 | 14.2 | 40.1 | 600 |
| 2x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 9.8 | 11.0 | 26.7 | 500 |
| 3x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 10.5 | 11.7 | 26.7 | 500 |
| 4x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 11.6 | 12.8 | 26.7 | 500 |
| 7x2x0.75 | 1.05 | 0.18 | 1.35 | 1.65 | 0.56 | 14.0 | 15.6 | 26.7 | 500 |
| 2x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 10.2 | 11.6 | 20.0 | 500 |
| 3x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 10.9 | 12.1 | 20.0 | 500 |
| 4x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 12.1 | 13.3 | 20.0 | 500 |
| 7x2x1.0 | 1.2 | 0.18 | 1.45 | 1.8 | 0.56 | 14.6 | 16.2 | 20.0 | 500 |
| 2x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 12.2 | 13.4 | 13.7 | 400 |
| 3x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 13.1 | 14.3 | 13.7 | 400 |
| 4x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 14.3 | 15.9 | 13.7 | 400 |
| 7x2x1.5 | 1.55 | 0.22 | 1.95 | 2.3 | 0.56 | 17.6 | 19.2 | 13.7 | 400 |

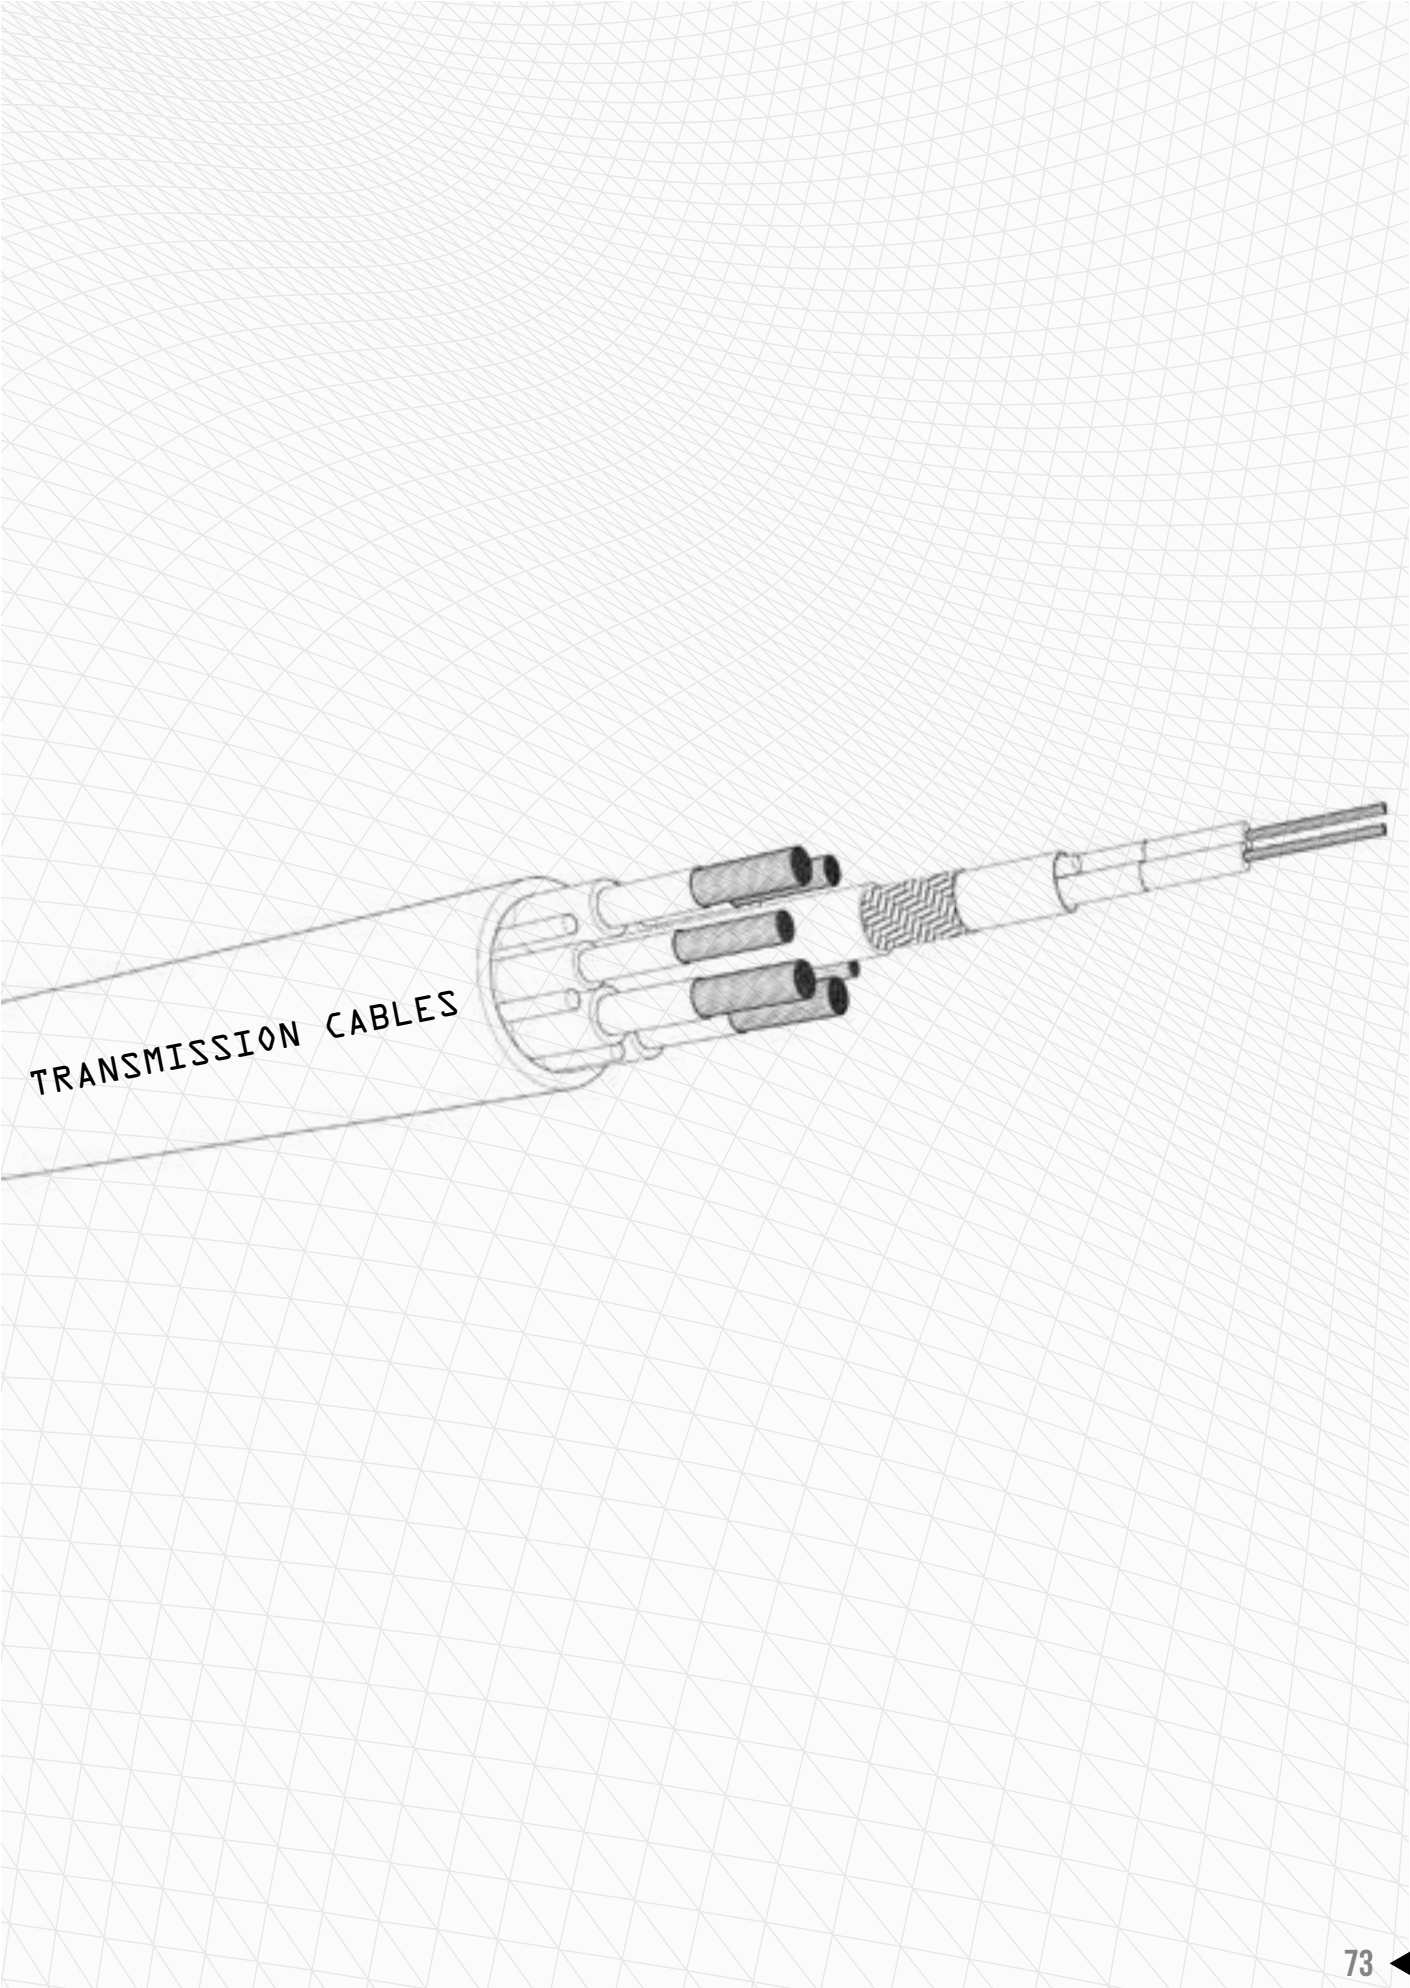

► **TK-MVB 2x0.50 OR 4x0.50 / 2x0.50 FR OR 4x0.50 FR (MULTIFUNCTION VEHICLE BUS)**



CABLE SPECIFICATIONS

| | |
|----------------------------|--|
| Conductor | Stranded tinned copper 0.50 mm ² |
| Insulation | Special thermoplastic polymer |
| Core identification | White-Red-Black-Blue for 4x0.50 White - Black for 2x0.50 |
| Protection | Flame barrier tape (*) |
| Assembling | 2 or 4 conductors + eventual filler and tape are assembled together |
| Screen | Aluminium/Mylar tape + tinned copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free black or green |


TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Fire resistant | EN 50200 PH 15(*) |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

(*)Only for FR version

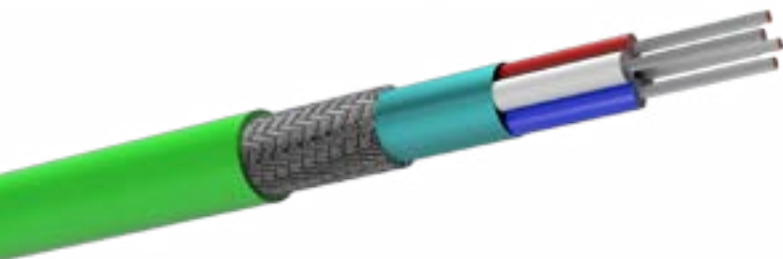

MAIN FEATURES

| | TK-MVB 2x0.50 | TK-MVB 4x0.50 | TK-MVB 2x0.50 FR | TK-MVB 4x0.50 FR |
|--|----------------|---------------|------------------|------------------|
| Conductor resistance | ≤ 40.1 Ω/km | ≤ 40.1 Ω/km | ≤ 40.1 Ω/km | ≤ 40.1 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm | ≥ 500 MΩxkm | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | 2000 V | 2000 V | 2000 V | 2000 V |
| Characteristic Impedance | @ 0.5 ÷ 3 MHz | 120 ± 12 Ω | 120 ± 12 Ω | 120 ± 12 Ω |
| | @ 1.5 MHz | 120 ± 6 Ω | 120 ± 6 Ω | 120 ± 6 Ω |
| Transfer Impedance | ≤ 20 MHz | ≤ 1 mΩ/m | ≤ 1 mΩ/m | ≤ 1 mΩ/m |
| Mutual capacitance | | ≤ 46 pF/m | ≤ 46 pF/m | ≤ 46 pF/m |
| Nominal Velocity of Propagation | | 78% | 78% | 78% |
| Next | @ 0.75 - 3 MHz | ≥ 55 dB | ≥ 55 dB | ≥ 55 dB |
| Attenuation | @ 1.5 MHz | ≤ 15 dB/km | ≤ 15 dB/km | ≤ 15 dB/km |
| | @ 3 MHz | ≤ 20 dB/km | ≤ 20 dB/km | ≤ 20 dB/km |
| Nominal weight | | 65 kg/km | 90 kg/km | 85 kg/km |
| Nominal diameter | | 6.8 mm | 7.4 mm | 7.5 mm |

TK-MVB 4x0.50+4x0.25 (MULTIFUNCTION VEHICLE BUS)

ON REQUEST



CABLE SPECIFICATIONS


| | |
|----------------------------|---|
| Conductor | Stranded tinned copper 0.50 mm ² |
| Insulation | Special thermoplastic polymer |
| Core identification | White-Red-Black-Blue |
| Conductor | Stranded tinned copper 0.25 mm ² |
| Insulation | Tecnopolymer compounds (double layer) compliant to EN 50306-1 |
| Core identification | White numbered |
| Total assembling | 4x0.50 mm ² + 4x0.25 mm ² with eventual filler and synthetic tape |
| Total Screen | Tinned Copper Braid |
| Total Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black or Green |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 6xØ |

FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

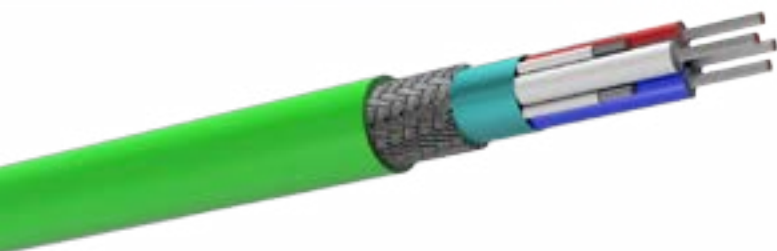


MAIN FEATURES

| TK-MVB 4x0.50+4x0.25 | |
|--|--|
| Conductor resistance | $\leq 40.1 \Omega/\text{km}$ (0.50mm ²) $\leq 90.1 \Omega/\text{km}$ (0.25mm ²) |
| Insulation resistance | $\geq 250 \text{ M}\Omega \times \text{km}$ |
| Test voltage | 2000 V |
| Characteristic Impedance | @ 0.5 ÷ 3 MHz $120 \pm 12 \Omega$ @ 1.5 MHz $120 \pm 6 \Omega$ |
| Mutual capacitance | $\leq 46 \text{ pF/m}$ |
| Nominal Velocity of Propagation | 78% |
| Attenuation | @ 1.5 MHz $\leq 17 \text{ dB/km}$ @ 3 MHz $\leq 25 \text{ dB/km}$ |
| Nominal weight | 95 kg/km |
| Nominal diameter | 7.4 mm |

MAIN FEATURES

| | TK-RS485 2x2x0.50 | TK-RS485 4x2x0.50 |
|--|-------------------|-------------------|
| Conductor resistance | ≤ 40.1 Ω/km | ≤ 40.1 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | 2000 V | 2000 V |
| Characteristic Impedance @ 0.75 ÷ 3 MHz | 120 ± 12 Ω | 120 ± 12 Ω |
| Transfer Impedance @ ≤ 30 MHz | ≤ 30 mΩ/m | ≤ 30 mΩ/m |
| Mutual capacitance | ≤ 46 pF/m | ≤ 46 pF/m |
| Nominal Velocity of Propagation | 78% | 78% |
| Attenuation | @ 1 MHz | ≤ 12.5 dB/km |
| | @ 2 MHz | ≤ 18 dB/km |
| | @ 3 MHz | ≤ 22.5 dB/km |
| Nominal weight | 165 kg/km | 180 kg/km |
| Nominal diameter | 10.2 mm | 11.0 mm |

TK-RS485 2x0.50+1x0.50

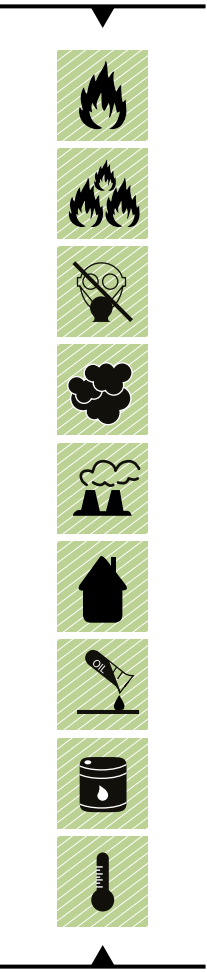

CABLE SPECIFICATIONS


| | |
|----------------------------|--|
| | PAIR 2X0.5 WITH CONTROLLED IMPEDANCE |
| Conductors | Stranded tinned copper 0.50 mm ² |
| Insulation | Special thermoplastic polymer |
| Pair colour | White-Red |
| | SINGLE CORE |
| Conductors | Stranded tinned copper 0.50 mm ² |
| Insulation | Special double layers of olefinic |
| Core identification | Black |
| Total assembling | 1 pair and single core + eventual filler and tape are assembled together |
| Total Screen | Aluminium/Mylar tape + tinned copper braid |
| Total Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

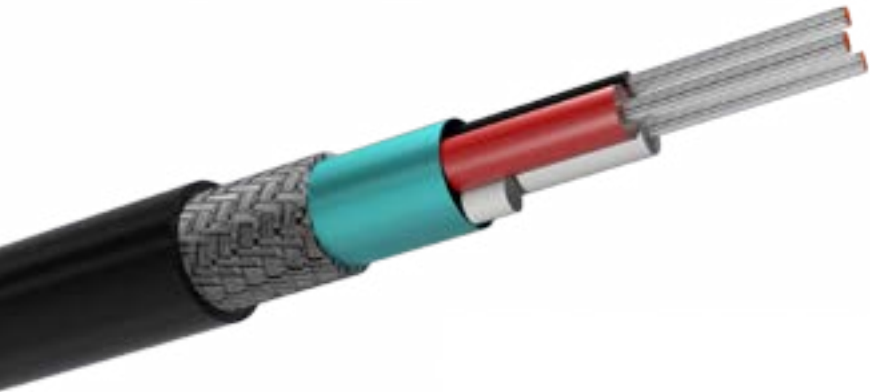

MAIN FEATURES

| TK-RS485 2x0.50+1x0.50 | | |
|--|----------------|--------------|
| Conductor resistance | | ≤ 40.1 Ω/km |
| Insulation resistance | | ≥ 500 MΩxkm |
| Test voltage | | 2000 V |
| Characteristic Impedance | @ 0.75 ÷ 3 MHz | 120 ± 12 Ω |
| | @ 1 MHz | 120 ± 6 Ω |
| Transfer Impedance | @ ≤ 30 MHz | ≤ 30 mΩ/m |
| Mutual capacitance | | ≤ 46 pF/m |
| Nominal Velocity of Propagation | | 78% |
| Attenuation | @ 1 MHz | ≤ 12.5 dB/km |
| | @ 2 MHz | ≤ 18 dB/km |
| | @ 3 MHz | ≤ 22.5 dB/km |
| Nominal weight | | 70 kg/km |
| Nominal diameter | | 6.8 mm |

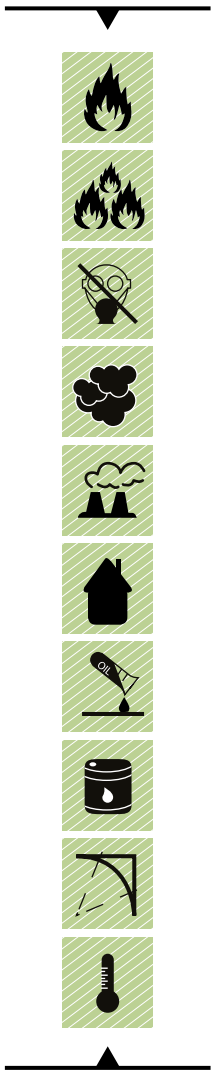

CABLE SPECIFICATIONS

| | |
|----------------------|---|
| Conductors | Stranded tinned copper 0.60 mm ² |
| Insulation | Special thermoplastic polymer |
| Pair colour | White-Red |
| First screen | Tinned copper braid |
| Inner sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |
| Second screen | Tinned copper braid |
| Outer Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 5xØ |

FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |



MAIN FEATURES

| | | TK-RS485 2x0.60 |
|--|-------------------------|--|
| Conductor resistance | | $\leq 32.2 \Omega/\text{km}$ |
| Insulation resistance | | $\geq 3000 \text{ M}\Omega \times \text{km}$ |
| Test voltage | | 2000 V |
| Characteristic Impedance | @ 1 MHz | $120 \pm 6 \Omega$ |
| Transfer Impedance | @ $\leq 30 \text{ MHz}$ | $\leq 10 \text{ m}\Omega/\text{m}$ |
| Mutual capacitance | | $\leq 50 \text{ pF}/\text{m}$ |
| Nominal Velocity of Propagation | | 78% |
| Attenuation | @ 200 KHz | $\leq 6 \text{ dB}/\text{km}$ |
| Nominal weight | | 125 kg/km |
| Nominal diameter | | 8.8 mm |



CABLE SPECIFICATIONS



Conductors

Stranded tinned copper AWG22

Insulation

Special thermoplastic polymer

Pair colour

White-Blue
White-Orange

First screen

Alu/Poliester or Alu/Poliester Alu

Second screen

Tinned copper braid

Sheath

Crosslinked material type EM 104,
flame retardant, halogen free
Black

TECHNICAL DATA

Operating voltage

300 V

Operating temperature

-40°C ÷ +90°C

Minimum bending radius

10xØ

FIRE PERFORMANCE

Fire propagation

EN 60332-1-2
EN 50266-2-5

Smoke density


EN 61034-1/2

Halogen-free

EN 50267-2-1/2

Fumes


No corrosive and toxic fumes

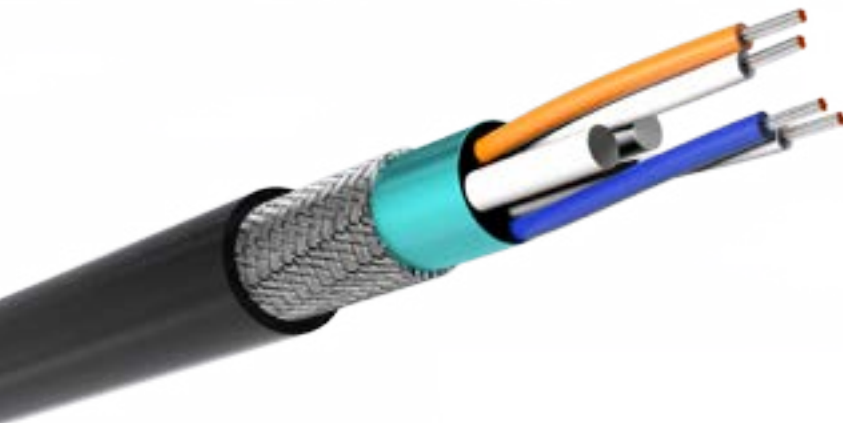

MAIN FEATURES

| TK-RS485 2x2xAWG22 | |
|--------------------------------------|-------------------------------------|
| Conductor resistance | $\leq 55.0 \Omega/\text{km}$ |
| Insulation resistance | $\geq 250 \text{ M}\Omega\text{km}$ |
| Test voltage | 1000 V |
| Characteristic Impedance @ 1÷100 MHz | $120 \pm 15 \Omega$ |
| Mutual capacitance | $\leq 45 \text{ pF/m}$ |
| Nominal Velocity of Propagation | 78% |
| Attenuation @ 1 MHz | $\leq 1.8 \text{ dB}/100\text{m}$ |
| Nominal weight | 125 kg/km |
| Nominal diameter | 8.5 mm |

TK-CAN BUS 2X(2X0.25) OR 2X(2X0.50)

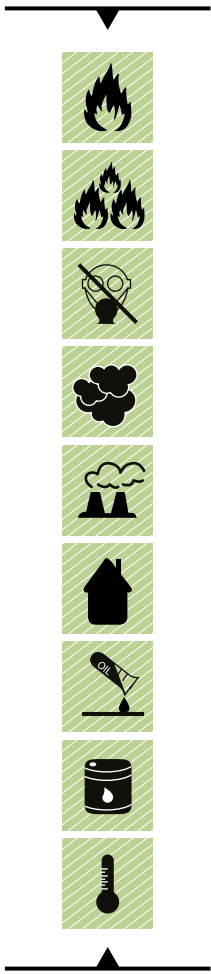

CABLE SPECIFICATIONS


| | |
|-----------------------|--|
| Conductor | Stranded tinned copper 0.25 mm ² or 0.50 mm ² |
| Insulation | Special thermoplastic polymer |
| Colours | White-Red-Black-Blue |
| Pair screen | Aluminium/Mylar tape + tinned copper braid |
| Pair sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |
| Overall screen | Tinned copper braid |
| Overall sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

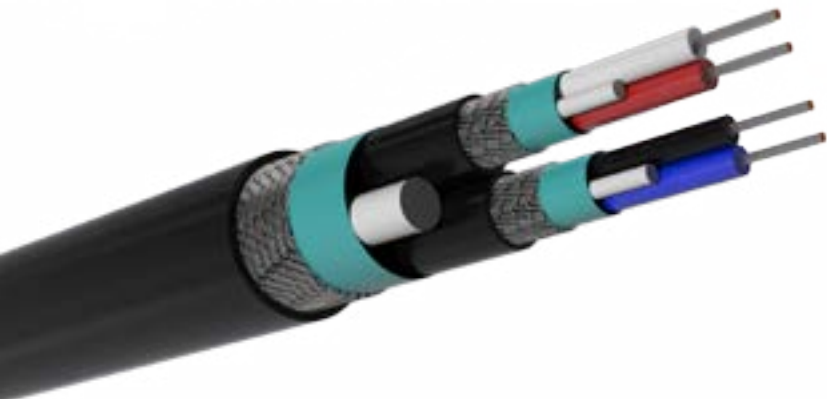

MAIN FEATURES

| | TK-CAN BUS 2x2x0.25 | TK-CAN BUS 2x2x0.50 |
|--|---------------------|---------------------|
| Conductor resistance | ≤ 40.1 Ω/km | ≤ 40.1 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | 2000 V | 2000 V |
| Characteristic Impedance @ 0.75 ÷ 3 MHz | 120 ± 12 Ω | 120 ± 12 Ω |
| Transfer Impedance @ ≤ 30 MHz | ≤ 30 mΩ/m | ≤ 30 mΩ/m |
| Mutual capacitance | ≤ 46 pF/m | ≤ 46 pF/m |
| Nominal Velocity of Propagation | 78% | 78% |
| Attenuation | @ 1 MHz | ≤ 22.8 dB/km |
| | @ 2 MHz | ≤ 33.7 dB/km |
| | @ 3 MHz | ≤ 43.5 dB/km |
| Nominal weight | 180 kg/km | 365 kg/km |
| Nominal diameter | 11.8 mm | 16.5 mm |

▶ TK-UIC WTB 2X0.50 OR 2X0.75 / 2X0.50 FR OR 2X0.75 FR (WIRED TRAIN BUS)

| | | |
|--|-----------------------------|---|
| | CABLE SPECIFICATIONS | <p>Conductors Stranded tinned copper 0.50 mm² or 0.75 mm²</p> <p>Insulation Special thermoplastic polymer</p> <p>Pair Colour White - Black</p> <p>Protection Flame barrier tape (*)</p> <p>Screen Tinned copper braid Aluminium/ Mylar tape + tinned copper braid</p> <p>Sheath Crosslinked material type EM 104, flame retardant, halogen free Black or Blue</p> |
| | TECHNICAL DATA | <p>Operating voltage 300/500 V</p> <p>Operating temperature -40°C ÷ +90°C</p> <p>Minimum bending radius 10xØ</p> |
| | FIRE PERFORMANCE | <p>Fire propagation EN 60332-1-2 EN 50266-2-5</p> <p>Fire resistant EN 50200 PH 15 (*)</p> <p>Smoke density EN 61034-1/2</p> <p>Halogen-free EN 50267-2-1/2</p> <p>Fumes No corrosive and toxic fumes</p> |

(*) only for FR version



MAIN FEATURES

| | | TK-WTB 2x0.50 | TK-WTB 2x0.75 | TK-WTB 2x0.50 FR | TK-WTB 2x0.75 FR |
|---------------------------------|---------------|---------------|---------------|------------------|------------------|
| Conductor resistance | | ≤ 40.1 Ω/Km | ≤ 26.0 Ω/Km | ≤ 40.1 Ω/Km | ≤ 26.0 Ω/Km |
| Insulation resistance | | ≥ 500 MΩxkm | ≥ 500 MΩxkm | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | | 1500 V | 1500 V | 1500 V | 1500 V |
| Characteristic Impedance | @ 0.5 ÷ 2 MHz | 120 ± 12 Ω | 120 ± 12 Ω | 120 ± 12 Ω | 120 ± 12 Ω |
| | @ 1 MHz | 120 ± 6 Ω | 120 ± 6 Ω | 120 ± 6 Ω | 120 ± 6 Ω |
| Transfer Impedance | @ ≤ 20 MHz | ≤ 20 mΩ/m | ≤ 20 mΩ/m | ≤ 20 mΩ/m | ≤ 20 mΩ/m |
| Mutual capacitance | | ≤ 65 pF/m | ≤ 65 pF/m | ≤ 65 pF/m | ≤ 65 pF/m |
| Attenuation | @ 1 MHz | ≤ 11 dB/km | ≤ 10 dB/km | ≤ 13 dB/km | ≤ 12 dB/km |
| | @ 2 MHz | ≤ 17 dB/km | ≤ 12 dB/km | ≤ 19 dB/km | ≤ 14 dB/km |
| Nominal weight | | 90 kg/km | 100 kg/km | 95 kg/km | 105 kg/km |
| Nominal diameter | | 8.0 mm | 8.0 mm | 8.5 mm | 8.5 mm |



CABLE SPECIFICATIONS

(*)

(*) only for FR version

Conductors Stranded tinned copper 0.75 mm²
Insulation Special thermoplastic polymer
Pair Colour White - Black
Protection Flame barrier tape (*)
Pair Screen Aluminium/Mylar tape + tinned copper braid
Pair Sheath Crosslinked material type EM 104, flame retardant, halogen free Black

SIGNAL / POWER ELEMENTS

Conductors Stranded tinned copper 10 mm²
Protection Flame barrier tape (*)
Insulation Cross-linked Material type E1105
Colours White numbered
Conductors Stranded tinned copper 6 mm²
Protection Flame barrier tape (*)
Insulation Cross-linked Polymer type E1105
Colours White numbered
Conductors Stranded tinned copper 2.5 mm²
Protection Flame barrier tape (*)
Insulation Cross-linked Material type E1105
Colours White numbered

Total assembling 1 Pair with controlled impedance + 4x10mm² + 2x6mm² + 1x2.5mm² + eventually filler and tape are assembled together

Total Sheath Crosslinked material type EM 104, flame retardant, halogen free Black

TECHNICAL DATA

Operating voltage 300 V
Operating temperature -40°C ÷ +90°C
Minimum bending radius 10xØ


FIRE PERFORMANCE

Fire propagation EN 60332-1-2
 EN 50264-2-4
Fire resistant EN 50362 PH 15 (*)
Smoke density EN 61034-1/2
Halogen-free EN 50267-2-1/2
Fumes No corrosive and toxic fumes

MAIN FEATURES

| | | TK-UIC 9 CORE | TK-UIC 9 CORE FR |
|---------------------------------|-------------------------|--|--|
| Conductor resistance | | $\leq 26.0 \Omega/\text{Km}$ (0.75mm^2) | $\leq 26.0 \Omega/\text{Km}$ (0.75mm^2) |
| | | $\leq 1.95 \Omega/\text{Km}$ (10mm^2) | $\leq 1.95 \Omega/\text{Km}$ (10mm^2) |
| | | $\leq 3.39 \Omega/\text{Km}$ (6mm^2) | $\leq 3.39 \Omega/\text{Km}$ (6mm^2) |
| | | $\leq 8.21 \Omega/\text{Km}$ (2.5mm^2) | $\leq 8.21 \Omega/\text{Km}$ (2.5mm^2) |
| Insulation resistance | | $\geq 500 \text{ M}\Omega\text{xkm}$ | $\geq 500 \text{ M}\Omega\text{xkm}$ |
| Test voltage | | 1500 V | 1500 V |
| Characteristic Impedance | @ 0.5 ÷ 2 MHz | $120 \pm 12 \Omega^*$ | $120 \pm 12 \Omega^*$ |
| | @ 1 MHz | $120 \pm 6 \Omega^*$ | $120 \pm 6 \Omega^*$ |
| Transfer Impedance | @ $\leq 30 \text{ MHz}$ | $\leq 30 \text{ m}\Omega/\text{m}^*$ | $\leq 30 \text{ m}\Omega/\text{m}^*$ |
| Mutual capacitance | | $\leq 65 \text{ pF}/\text{m}^*$ | $\leq 65 \text{ pF}/\text{m}^*$ |
| Attenuation | @ 1 MHz | $\leq 10 \text{ dB}/\text{km}^*$ | $\leq 12 \text{ dB}/\text{km}^*$ |
| | @ 2 MHz | $\leq 12 \text{ dB}/\text{km}^*$ | $\leq 14 \text{ dB}/\text{km}^*$ |
| Nominal weight | | 1050 kg/km | 1150 kg/km |
| Nominal diameter | | 26.5 mm | 28.0 mm |

*Only for pair 0.75mm^2

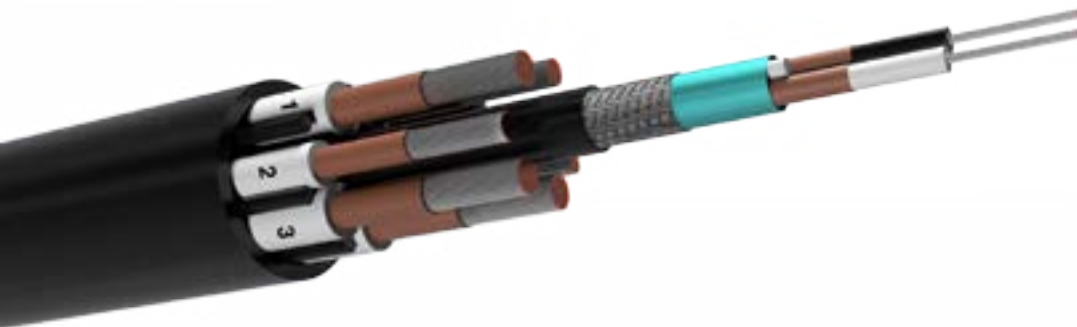

| | | |
|--|-----------------------------|---|
| | CABLE SPECIFICATIONS | <p>Conductors Stranded tinned copper 0.5 mm²</p> <p>Insulation Cross-linked Halogen free</p> <p>Quad colour Red, Black, White and Yellow</p> <p>Protection Flame barrier tape (*)</p> <p>Assembling 3 quads + eventually filler and tape are assembled together</p> <p>Screen Tinned copper braid</p> <p>Sheath Crosslinked material type EM 104, flame retardant, halogen free Black</p> |
| | TECHNICAL DATA | <p>Operating voltage 300 V</p> <p>Operating temperature -40°C ÷ +90°C</p> <p>Minimum bending radius 6xØ</p> |
| | FIRE PERFORMANCE | <p>Fire propagation EN 60332-1-2 EN 50266-2-4</p> <p>Fire resistant EN 50200 PH 15 (*)</p> <p>Smoke density EN 61034-1/2</p> <p>Halogen-free EN 50267-2-1/2</p> <p>Fumes No corrosive and toxic fumes</p> |

(*) only for FR version

MAIN FEATURES

| | TK-UIC 12 CORE | TK-UIC 12 CORE FR |
|--------------------------------------|----------------|-------------------|
| Conductor resistance | ≤ 40.1 Ω/Km | ≤40.1 Ω/Km |
| Insulation resistance | ≥ 400 MΩxkm | ≥ 400 MΩxkm |
| Test voltage | 1500 V | 1500 V |
| Transfer Impedance @ ≤ 30 MHz | ≤ 20 mΩ/m | ≤ 20 mΩ/m |
| Mutual capacitance | ≤ 65 pF/m | ≤ 65 pF/m |
| Nominal weight | 180 kg/km | 200 kg/km |
| Nominal diameter | 11.2 mm | 12.0 mm |





CABLE SPECIFICATIONS

Conductors Stranded tinned copper 1 mm²
Insulation Special thermoplastic polymer
Colours White numbered
Protection Flame barrier tape (*)

QUAD 4X1 WITH CONTROLLED IMPEDANCE

Conductors Stranded tinned copper 1 mm²
Insulation Double layers of olefinic insulation according to EN50306
Colours White numbered
Protection Flame barrier tape (*)

SIGNAL QUAD 3X4X1

Total assembling 1 quad with controlled impedance + 3 signal quads + eventually filler and tape are assembled together
Total Screen Tinned copper braid
Total Sheath Cross-linked Material, Flame Retardant, Halogen Free Black

TECHNICAL DATA

Operating voltage 300/500 V
Operating temperature -40°C ÷ +90°C
Minimum bending radius 10xØ

FIRE PERFORMANCE

(*) only for FR version

Fire propagation EN 60332-1-2
 EN 50266-2-4
Fire resistant EN 50200 PH 15(*)
Smoke density EN 61034-1/2
Halogen-free EN 50267-2-1/2
Fumes No corrosive and toxic fumes

MAIN FEATURES

| | TK-UIC 16 CORE | TK-UIC 16 CORE FR |
|---|----------------|-------------------|
| Conductor resistance | ≤ 20.0 Ω/Km | ≤ 20.0 Ω/Km |
| Insulation resistance | ≥ 400 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | 1500 V | 1500 V |
| Characteristic Impedance @ 0.5 MHz | 120 ± 6 Ω* | 120 ± 6 Ω* |
| Transfer Impedance @ ≤ 20 MHz | ≤ 50 mΩ/m | ≤ 50 mΩ/m |
| Mutual capacitance | ≤ 65 pF/m* | ≤ 65 pF/m* |
| Nominal weight | 360 kg/km | 430 kg/km |
| Nominal diameter | 16.0 mm | 18.0 mm |

*Only for quad 1mm² with controlled impedance



CABLE SPECIFICATIONS



(*)

(*) only for FR version

| | |
|--|---|
| PAIR 2X0.75 WITH CONTROLLED IMPEDANCE | |
| Conductors | Stranded tinned copper 0.75 mm ² |
| Insulation | Special thermoplastic polymer |
| Pair Colours | White-Black |
| Protection | Flame barrier tape (*) |
| Pair Screen | Tinned copper braid |
| Sheath | Cross-linked Material, Flame Retardant, Halogen Free Black |

| | |
|---|---|
| QUAD 4X1 WITH CONTROLLED IMPEDANCE | |
| Conductors | Stranded tinned copper 1mm ² |
| Insulation | Special thermoplastic polymer |
| Pair Colours | White-numbered |
| Protection | Flame barrier tape (*) |

| | |
|------------------------|--|
| SIGNAL QUAD 4X1 | |
| Conductors | Stranded tinned copper 1 mm ² |
| Insulation | Double layers of olefinic insulation according to EN50306 |
| Pair Colours | White-numbered |
| Protection | Flame barrier tape (*) |

| | |
|-------------------------|---|
| Total assembling | 1 quad with controlled impedance + 3 signal quads + 1 pair with controlled impedance + eventually filler and tape are assembled together |
| Total Screen | Tinned copper braid |
| Total Sheath | Cross-linked Material, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-4 |
| Fire resistant | EN 50200 / EN 50362 PH 15(*) |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |



MAIN FEATURES

| | | TK-UIC 18 CORE | TK-UIC 18 CORE FR |
|---------------------------------|---------------|------------------------------------|------------------------------------|
| Conductor resistance | | ≤ 26.7 Ω/Km (0.75mm ²) | ≤ 26.7 Ω/Km (0.75mm ²) |
| | | ≤ 20.0 Ω/Km (1mm ²) | ≤ 20.0 Ω/Km (1mm ²) |
| Insulation resistance | | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | | 1500 V | 1500 V |
| Characteristic Impedance | @ 0.5 ÷ 2 MHz | 120 ± 12 Ω* | 120 ± 12 Ω* |
| | @ 1 MHz | 120 ± 6 Ω* | 120 ± 6 Ω* |
| | @ 0.5 MHz | 120 ± 6 Ω** | 120 ± 6 Ω** |
| Transfer Impedance | @ ≤ 20 MHz | ≤ 50 mΩ/m | ≤ 50 mΩ/m |
| | | | |
| Mutual capacitance | | ≤ 65 pF/m* ** | ≤ 65 pF/m* ** |
| Attenuation | @ 1 MHz | ≤ 10 dB/Km* | ≤ 12 dB/Km* |
| | @ 2 MHz | ≤ 12 dB/Km* | ≤ 14 dB/Km* |
| Nominal weight | | 515 kg/km | 600 kg/km |
| Nominal diameter | | 18.0 mm | 20.5 mm |


*only for pair 0.75 mm²

**Only for quad 1mm² with controlled impedance.

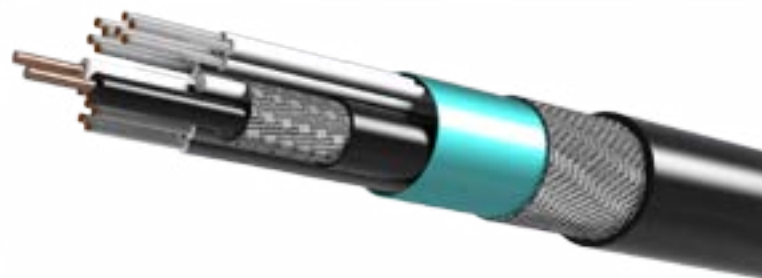

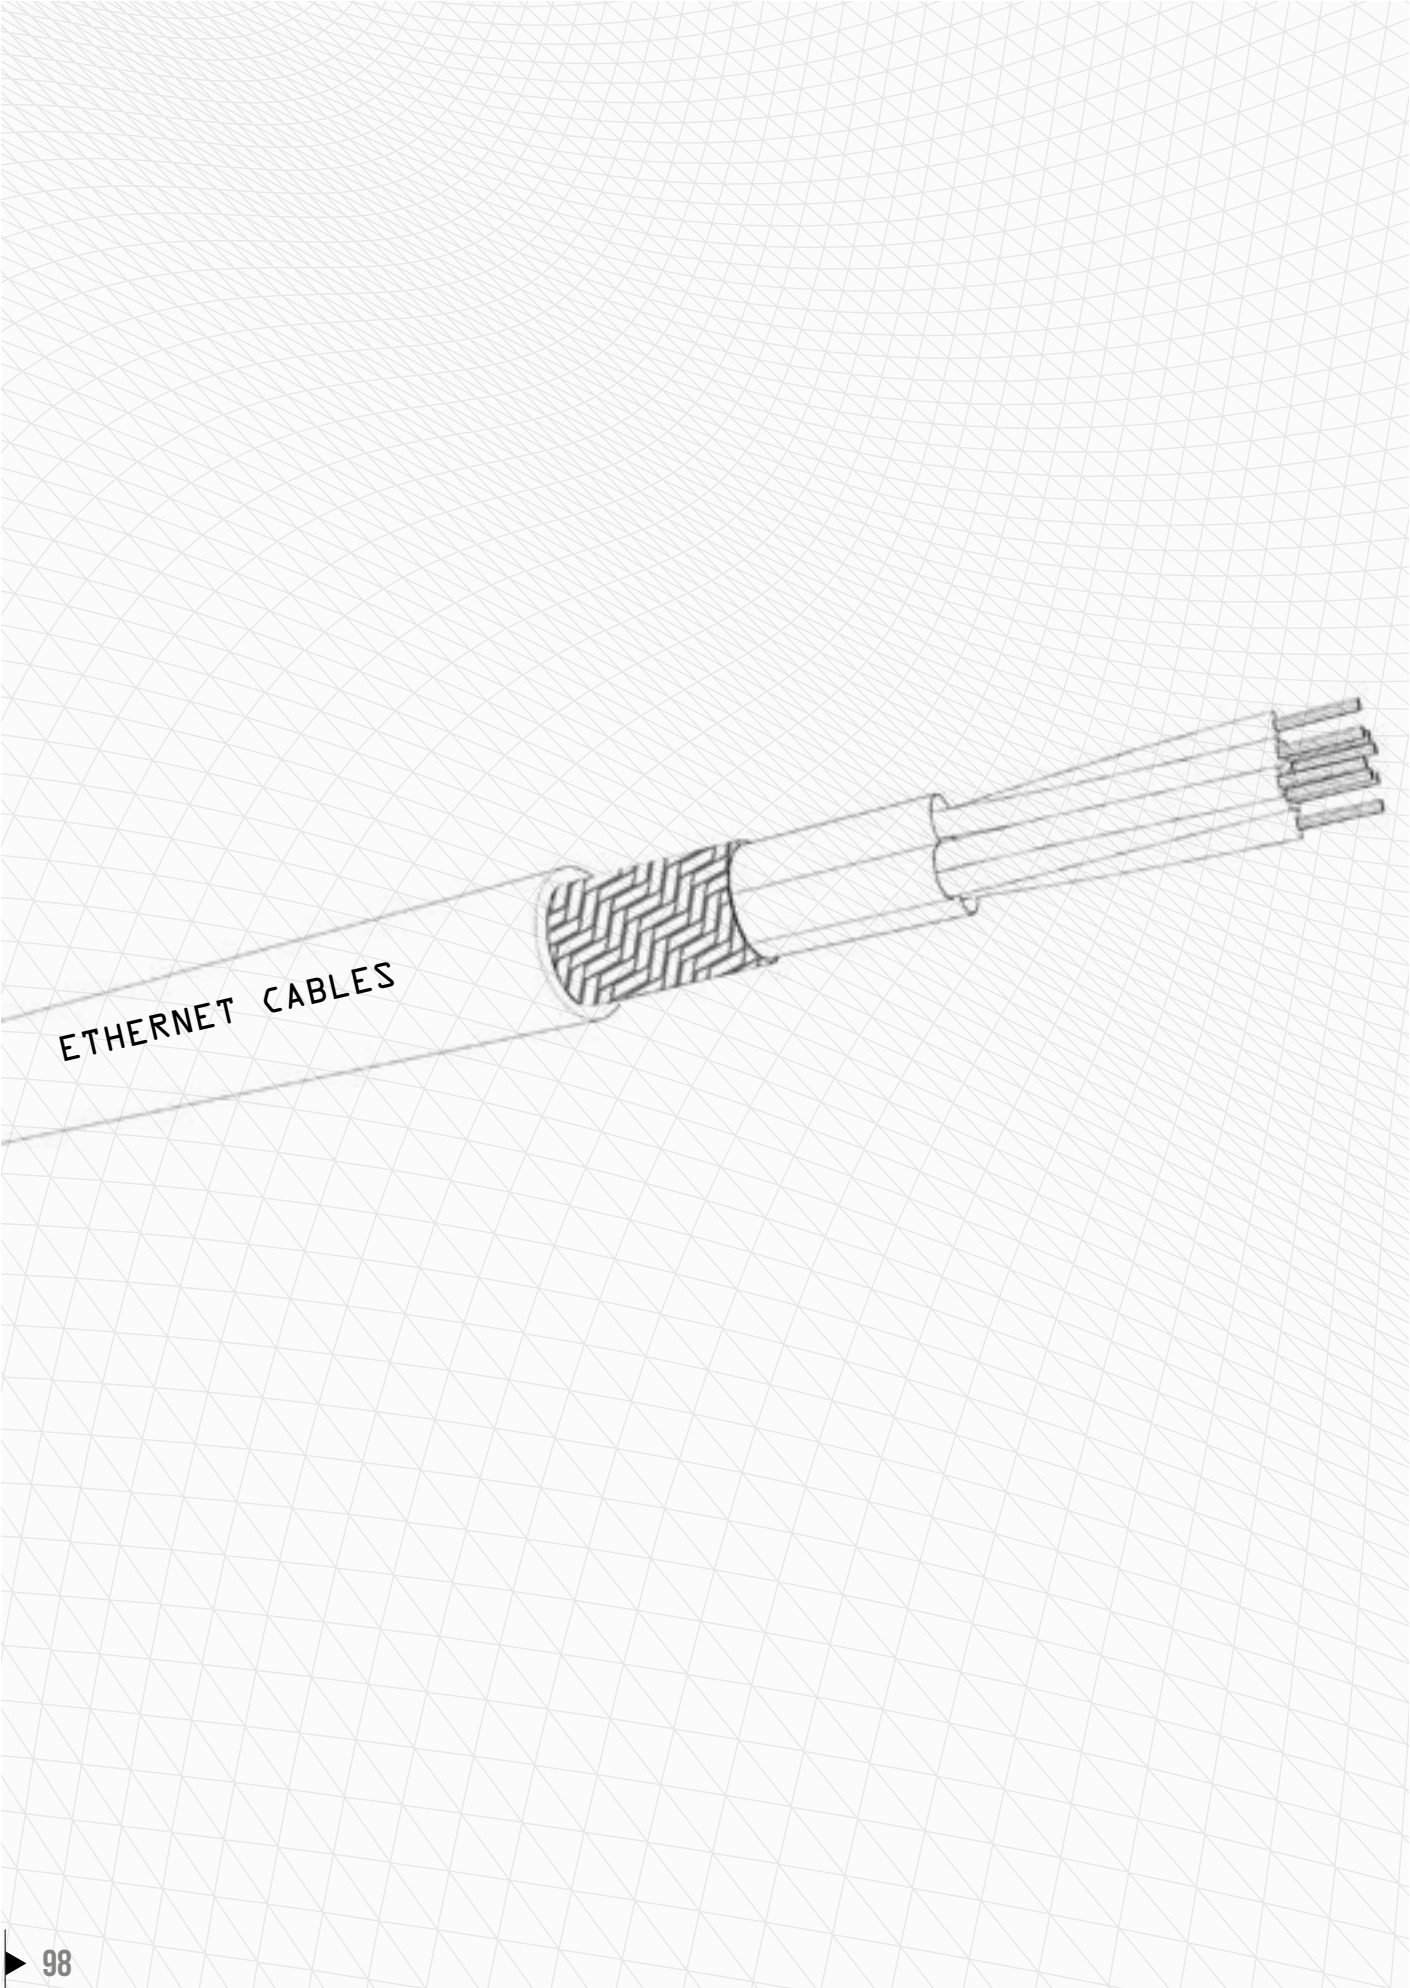

ETHERNET CABLES

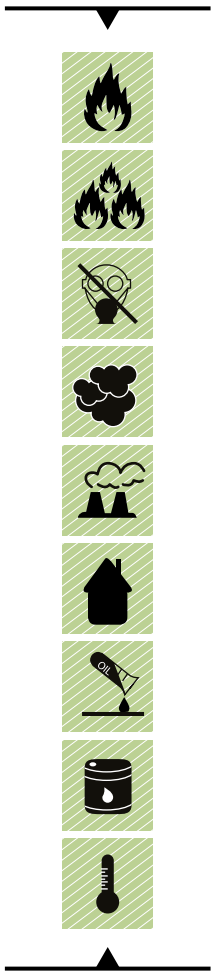

CABLE SPECIFICATIONS


| | |
|---------------------|--|
| Conductor | Stranded tinned copper AWG22 |
| Insulation | Special thermoplastic polymer |
| Pair Colours | White/Blue; Yellow/Orange for 2 pair White/Blue; White/Orange; White/Green; White/Brown for 4 pair |
| Assembling | 2 or 4 pairs + eventual filler and tape are assembled together |
| Screen | Aluminium/Mylar tape + tinned copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free green |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 300 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10 x Ø |

FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

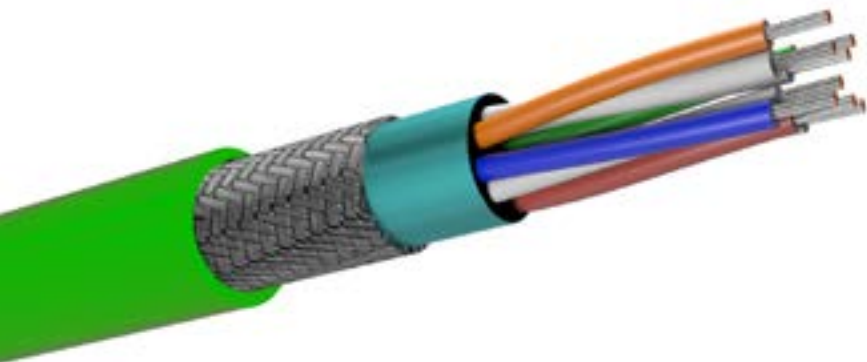











MAIN FEATURES


| | TK-SF/UTP 2x2xAWG22 CAT.5E | TK-SF/UTP 4x2xAWG22 CAT.5E |
|--|-------------------------------|-------------------------------|
| Conductor resistance | ≤ 60.0 Ω/km | ≤ 60.0 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | 700 V | 700 V |
| Characteristic Impedance | @ 1÷ 100 MHz 100 ± 15 Ω | 100 ± 15 Ω |
| Transfer Impedance | @ ≤ 1 MHz | ≤ 50 mΩ/m |
| | @ ≤ 10 MHz | ≤ 100 mΩ/m |
| | @ ≤ 30 MHz | ≤ 200 mΩ/m |
| Mutual capacitance | ≤ 46 pF/m | ≤ 52 pF/m |
| Nominal Velocity of Propagation | 78% | 78% |
| Nominal weight | 65 kg/km | 115 kg/km |
| Nominal diameter | 8.0 mm | 8.5 mm |

MAIN FEATURES

| | | TK-SF/UTP 2x2xAWG22 CAT.5E | TK-SF/UTP 4x2xAWG22 CAT.5E |
|-------------|-----------|-------------------------------|-------------------------------|
| Attenuation | 1 MHz | ≤ 3.2 dB/100m | ≤ 3.2 dB/100m |
| | 4 MHz | ≤ 6.0 dB/100m | ≤ 6.0 dB/100m |
| | 10 MHz | ≤ 9.5 dB/100m | ≤ 9.5 dB/100m |
| | 16 MHz | ≤ 12.1 dB/100m | ≤ 12.1 dB/100m |
| | 20 MHz | ≤ 13.6 dB/100m | ≤ 13.6 dB/100m |
| | 31.25 MHz | ≤ 17.1 dB/100m | ≤ 17.1 dB/100m |
| | 62.5 MHz | ≤ 24.1 dB/100m | ≤ 24.1 dB/100m |
| | 100 MHz | ≤ 32.0 dB/100m | ≤ 32.0 dB/100m |
| Next | 1 MHz | ≥ 65.3 dB | ≥ 65.3 dB |
| | 4 MHz | ≥ 56.3 dB | ≥ 56.3 dB |
| | 10 MHz | ≥ 50.3 dB | ≥ 50.3 dB |
| | 16 MHz | ≥ 47.2 dB | ≥ 47.2 dB |
| | 20 MHz | ≥ 45.8 dB | ≥ 45.8 dB |
| | 31.25 MHz | ≥ 42.9 dB | ≥ 42.9 dB |
| | 62.5 MHz | ≥ 38.4 dB | ≥ 38.4 dB |
| | 100 MHz | ≥ 35.3 dB | ≥ 35.3 dB |
| PSNext | 1 MHz | ≥ 63.8 dB | ≥ 63.8 dB |
| | 4 MHz | ≥ 51.8 dB | ≥ 51.8 dB |
| | 10 MHz | ≥ 43.8 dB | ≥ 43.8 dB |
| | 16 MHz | ≥ 39.7 dB | ≥ 39.7 dB |
| | 20 MHz | ≥ 37.8 dB | ≥ 37.8 dB |
| | 31.25 MHz | ≥ 33.9 dB | ≥ 33.9 dB |
| | 62.5 MHz | ≥ 27.9 dB | ≥ 27.9 dB |
| | 100 MHz | ≥ 23.8 dB | ≥ 23.8 dB |
| Return Loss | 1 MHz | ≥ 23.0 dB | ≥ 23.0 dB |
| | 4 MHz | ≥ 24.1 dB | ≥ 24.1 dB |
| | 10 MHz | ≥ 25.0 dB | ≥ 25.0 dB |
| | 16 MHz | ≥ 25.0 dB | ≥ 25.0 dB |
| | 20 MHz | ≥ 25.0 dB | ≥ 25.0 dB |
| | 31.25 MHz | ≥ 23.6 dB | ≥ 23.6 dB |
| | 62.5 MHz | ≥ 21.5 dB | ≥ 21.5 dB |
| | 100 MHz | ≥ 20.1 dB | ≥ 20.1 dB |

| | | |
|---|-----------------------------|--|
|    (*)        | CABLE SPECIFICATIONS | <p>Conductor Stranded tinned copper AWG22</p> <p>Insulation Special thermoplastic polymer</p> <p>Pair Colours White-Blue; Yellow-Orange</p> <p>Protection Flame barrier tape (*)</p> <p>Assembling 4 conductors + eventual filler and tape are assembled together</p> <p>Inner Sheath Halogen free material</p> <p>Screen Aluminium/Mylar tape + tinned copper braid</p> <p>Outer Sheath Crosslinked material type EM 104, flame retardant, halogen free green</p> |
| | TECHNICAL DATA | <p>Operating Voltage 300 V</p> <p>Operating temperature -40°C ÷ +90°C</p> <p>Minimum bending radius 10 xØ</p> |
| | FIRE PERFORMANCE | <p>Fire propagation EN 60332-1-2 EN 50266-2-5</p> <p>Smoke density EN 61034-1/2</p> <p>Halogen-free EN 50267-2-1/2</p> <p>Fumes No corrosive and toxic fumes</p> |

(*) only for FR version

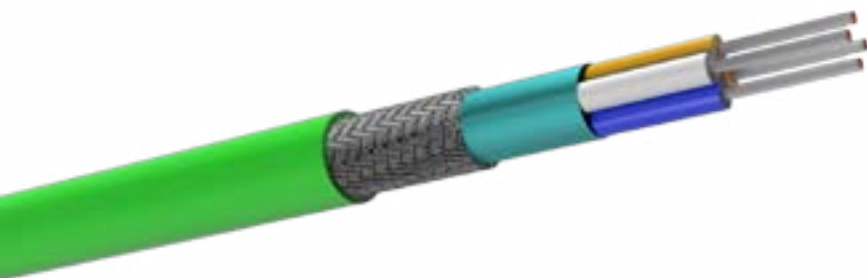


MAIN FEATURES

| | TK-SF/UTP 4xAWG22 CAT.5E | TK-SF/UTP 4xAWG22 FR CAT.5E |
|--|-----------------------------|--------------------------------|
| Conductor resistance | ≤ 60.0 Ω/km | ≤ 60.0 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm | ≥ 500 MΩxkm |
| Test voltage | 1000 V | 1000 V |
| Characteristic Impedance | | |
| @ 1÷ 100 MHz | 100 ± 15 Ω | 100 ± 15 Ω |
| Transfer Impedance | | |
| @ ≤ 1 MHz | ≤ 50 mΩ/m | ≤ 50 mΩ/m |
| @ ≤ 10 MHz | ≤ 100 mΩ/m | ≤ 100 mΩ/m |
| @ ≤ 30 MHz | ≤ 200 mΩ/m | ≤ 200 mΩ/m |
| Mutual capacitance | ≤ 46 pF/m | ≤ 46 pF/m |
| Nominal Velocity of Propagation | 78% | 78% |
| Nominal weight | 65 kg/km | 70 kg/km |
| Nominal diameter | 6.5 mm | 7.0 mm |

MAIN FEATURES

| | | TK-SF/UTP 4xAWG22 CAT.5E | TK-SF/UTP 4xAWG22 FR CAT.5E |
|--------------------|-----------|-----------------------------|--------------------------------|
| Attenuation | 1 MHz | ≤ 3.2 dB/100m | ≤ 2.4 dB/100m |
| | 4 MHz | ≤ 6.0 dB/100m | ≤ 4.9 dB/100m |
| | 10 MHz | ≤ 9.5 dB/100m | ≤ 7.8 dB/100m |
| | 16 MHz | ≤ 12.1 dB/100m | ≤ 9.8 dB/100m |
| | 20 MHz | ≤ 13.6 dB/100m | ≤ 11.1 dB/100m |
| | 31.25 MHz | ≤ 17.1 dB/100m | ≤ 14.0 dB/100m |
| | 62.5 MHz | ≤ 24.1 dB/100m | ≤ 20.4 dB/100m |
| | 100 MHz | ≤ 32.0 dB/100m | ≤ 26.4 dB/100m |
| Next | 1 MHz | ≥ 65.3 dB | ≥ 65.3 dB |
| | 4 MHz | ≥ 56.3 dB | ≥ 56.3 dB |
| | 10 MHz | ≥ 50.3 dB | ≥ 50.3 dB |
| | 16 MHz | ≥ 47.2 dB | ≥ 47.3 dB |
| | 20 MHz | ≥ 45.8 dB | ≥ 45.8 dB |
| | 31.25 MHz | ≥ 42.9 dB | ≥ 42.9 dB |
| | 62.5 MHz | ≥ 38.4 dB | ≥ 38.4 dB |
| | 100 MHz | ≥ 35.3 dB | ≥ 35.0 dB |
| PSNext | 1 MHz | ≥ 63.8 dB | |
| | 4 MHz | ≥ 51.8 dB | |
| | 10 MHz | ≥ 43.8 dB | |
| | 16 MHz | ≥ 39.7 dB | |
| | 20 MHz | ≥ 37.8 dB | |
| | 31.25 MHz | ≥ 33.9 dB | |
| | 62.5 MHz | ≥ 27.9 dB | |
| | 100 MHz | ≥ 23.8 dB | |
| Return Loss | 1 MHz | ≥ 23.0 dB | |
| | 4 MHz | ≥ 24.1 dB | |
| | 10 MHz | ≥ 25.0 dB | |
| | 16 MHz | ≥ 25.0 dB | |
| | 20 MHz | ≥ 25.0 dB | |
| | 31.25 MHz | ≥ 23.6 dB | |
| | 62.5 MHz | ≥ 21.5 dB | |
| | 100 MHz | ≥ 20.1 dB | |

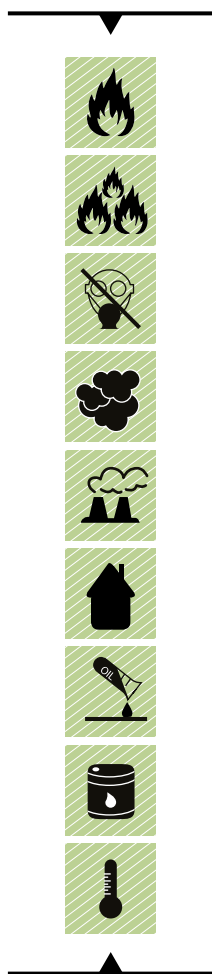

CABLE SPECIFICATIONS


| | |
|---------------------|--|
| Conductor | Stranded tinned copper AWG26 |
| Insulation | Polyethylene |
| Pair Colours | White/Blue-Blue; White/Orange-Orange; White/Green-Green; White/Brown-Brown |
| Assembling | 4 pairs + eventual filler and tape are assembled together |
| Screen | Aluminium/Mylar tape + tinned copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 230 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10 x Ø |

FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

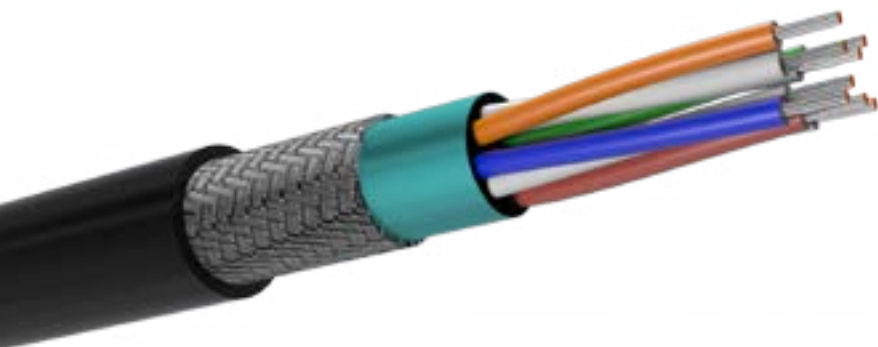

MAIN FEATURES

| TK-SF/UTP 4x2xAWG26 CAT.5E | |
|---------------------------------|-------------------------|
| Conductor resistance | ≤ 170.0 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm |
| Test voltage | 700V |
| Characteristic Impedance | @ 1÷ 100 MHz 100 ± 12 Ω |
| Mutual capacitance | ≤ 55 pF/m |
| Nominal Velocity of Propagation | 66% |
| Nominal weight | 65 kg/km |
| Nominal diameter | 6.2 mm |

| TK-SF/UTP 4x2xAWG26 CAT.5E | | |
|----------------------------|-----------|----------------|
| Attenuation | 1 MHz | ≤ 3.2 dB/100m |
| | 4 MHz | ≤ 6.0 dB/100m |
| | 10 MHz | ≤ 9.5 dB/100m |
| | 16 MHz | ≤ 12.1 dB/100m |
| | 20 MHz | ≤ 13.6 dB/100m |
| | 31.25 MHz | ≤ 17.1 dB/100m |
| | 62.5 MHz | ≤ 24.1 dB/100m |
| | 100 MHz | ≤ 32.0 dB/100m |
| Next | 1 MHz | ≥ 65.3 dB |
| | 4 MHz | ≥ 56.3 dB |
| | 10 MHz | ≥ 50.3 dB |
| | 16 MHz | ≥ 47.2 dB |
| | 20 MHz | ≥ 45.8 dB |
| | 31.25 MHz | ≥ 42.9 dB |
| | 62.5 MHz | ≥ 38.4 dB |
| | 100 MHz | ≥ 35.3 dB |
| PSNext | 1 MHz | ≥ 63.8 dB |
| | 4 MHz | ≥ 51.8 dB |
| | 10 MHz | ≥ 43.8 dB |
| | 16 MHz | ≥ 39.7 dB |
| | 20 MHz | ≥ 37.8 dB |
| | 31.25 MHz | ≥ 33.9 dB |
| | 62.5 MHz | ≥ 27.9 dB |
| | 100 MHz | ≥ 23.8 dB |
| Return Loss | 1 MHz | ≥ 23.0 dB |
| | 4 MHz | ≥ 24.1 dB |
| | 10 MHz | ≥ 25.0 dB |
| | 16 MHz | ≥ 25.0 dB |
| | 20 MHz | ≥ 25.0 dB |
| | 31.25 MHz | ≥ 23.6 dB |
| | 62.5 MHz | ≥ 21.5 dB |
| | 100 MHz | ≥ 20.1 dB |

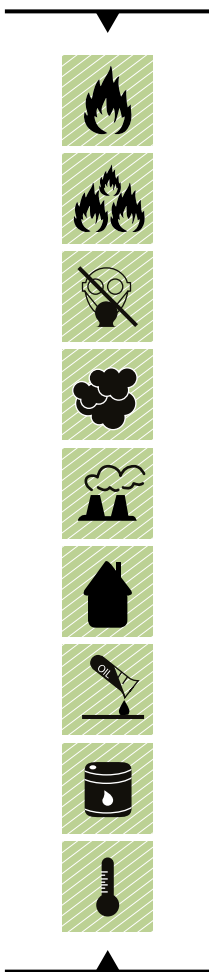

CABLE SPECIFICATIONS


| | |
|---------------------|--|
| Conductor | Stranded bare copper AWG24 |
| Insulation | Polyethylene |
| Pair Colours | White/Blue; White/Orange; White/Green; White/Brown |
| Assembling | 2 or 4 pairs + eventual filler and tape are assembled together |
| Screen | Aluminium/Mylar tape + tinned copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 230 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10 xØ |

FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

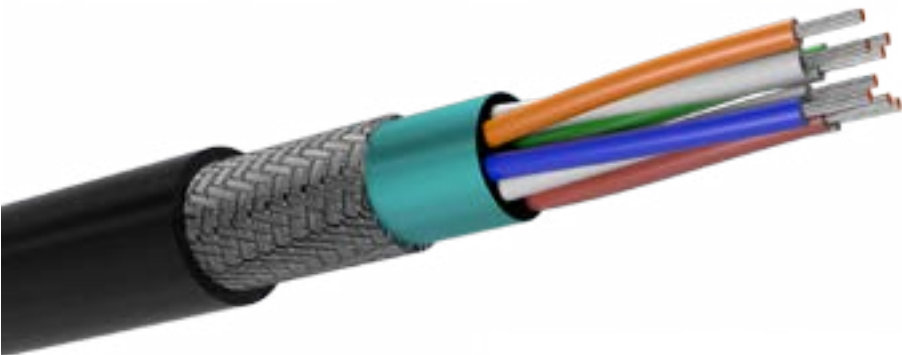

MAIN FEATURES

| TK-SF/UTP 4x2xAWG24 CAT.5E | |
|---------------------------------|-------------------------|
| Conductor resistance | ≤ 88.0 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm |
| Test voltage | 700 V |
| Characteristic Impedance | @ 1÷ 100 MHz 100 ± 15 Ω |
| Transfer Impedance | @ ≤ 1 MHz ≤ 100 mΩ/m |
| | @ ≤ 10 MHz ≤ 100 mΩ/m |
| Mutual capacitance | ≤ 52 pF/m |
| Nominal Velocity of Propagation | 66% |
| Nominal weight | 70 kg/km |
| Nominal diameter | 7.0 mm |

| TK-SF/UTP 4x2xAWG24 CAT.5E | | |
|----------------------------|-----------|----------------|
| Attenuation | 1 MHz | ≤ 3.2 dB/100m |
| | 4 MHz | ≤ 6.0 dB/100m |
| | 10 MHz | ≤ 9.5 dB/100m |
| | 16 MHz | ≤ 12.1 dB/100m |
| | 20 MHz | ≤ 13.6 dB/100m |
| | 31.25 MHz | ≤ 17.1 dB/100m |
| | 62.5 MHz | ≤ 24.1 dB/100m |
| Next | 100 MHz | ≤ 32.0 dB/100m |
| | 1 MHz | ≥ 65.3 dB |
| | 4 MHz | ≥ 56.3 dB |
| | 10 MHz | ≥ 50.3 dB |
| | 16 MHz | ≥ 47.2 dB |
| | 20 MHz | ≥ 45.8 dB |
| | 31.25 MHz | ≥ 42.9 dB |
| PSNext | 62.5 MHz | ≥ 38.4 dB |
| | 100 MHz | ≥ 35.3 dB |
| | 1 MHz | ≥ 63.8 dB |
| | 4 MHz | ≥ 51.8 dB |
| | 10 MHz | ≥ 43.8 dB |
| | 16 MHz | ≥ 39.7 dB |
| | 20 MHz | ≥ 37.8 dB |
| Return Loss | 31.25 MHz | ≥ 33.9 dB |
| | 62.5 MHz | ≥ 27.9 dB |
| | 100 MHz | ≥ 23.8 dB |
| | 1 MHz | ≥ 23.0 dB |
| | 4 MHz | ≥ 24.1 dB |
| | 10 MHz | ≥ 25.0 dB |
| | 16 MHz | ≥ 25.0 dB |
| Return Loss | 20 MHz | ≥ 25.0 dB |
| | 31.25 MHz | ≥ 23.6 dB |
| | 62.5 MHz | ≥ 21.5 dB |
| | 100 MHz | ≥ 20.1 dB |

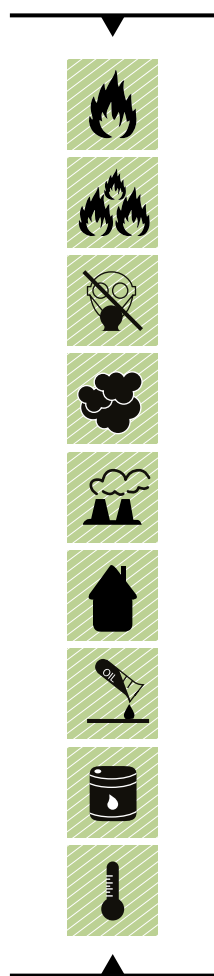

CABLE SPECIFICATIONS


| | |
|-----------------------|---|
| Conductor | Stranded bare copper AWG24 |
| Insulation | Foam Polyolefin |
| Pair Colours | White-Blue; White-Orange; White-Green; White-Brown |
| Pair Screen | Aluminium/Mylar tape |
| Assembling | 4 pairs + eventual filler and tape are assembled together |
| Overall Screen | Tinned copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 125 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10 xØ |

FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

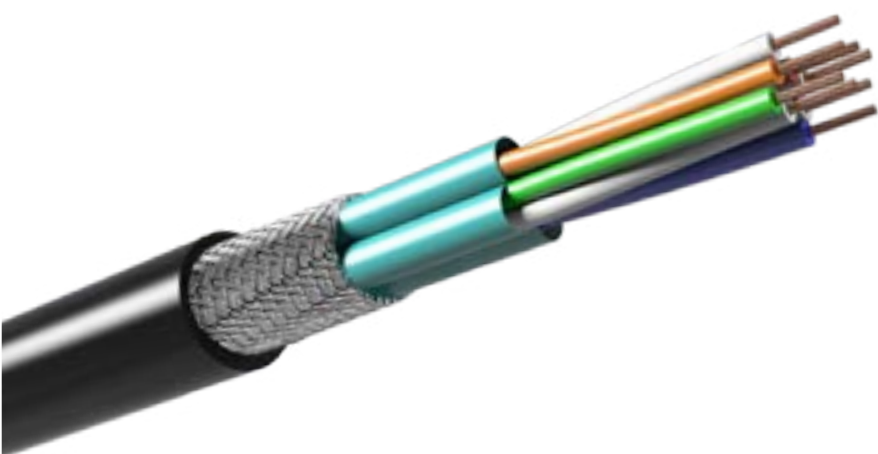

MAIN FEATURES

| TK-S/FTP 4X2XAWG24 CAT.7 | |
|---------------------------------|--------------------------|
| Conductor resistance | ≤ 88.0 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm |
| Test voltage | 700 V |
| Characteristic Impedance | @ 1 ÷ 100 MHz 100 ± 15 Ω |
| Transfer Impedance | @ ≤ 1 MHz ≤ 10 mΩ/m |
| | @ ≤ 30 MHz ≤ 30 mΩ/m |
| Mutual capacitance | ≤ 43 pF/m |
| Nominal Velocity of Propagation | 78% |
| Nominal weight | 97 kg/km |
| Nominal diameter | 8.8 mm |

| TK-S/FTP 4X2XAWG24 CAT.7 | | |
|--------------------------|----------------|----------------|
| Attenuation | 1 MHz | ≤ 2.9 dB/100m |
| | 4 MHz | ≤ 5.5 dB/100m |
| | 10 MHz | ≤ 8.5 dB/100m |
| | 16 MHz | ≤ 10.8 dB/100m |
| | 20 MHz | ≤ 12.1 dB/100m |
| | 31.25 MHz | ≤ 15.2 dB/100m |
| | 62.5 MHz | ≤ 21.7 dB/100m |
| | 100 MHz | ≤ 27.8 dB/100m |
| | 155 MHz | ≤ 35 dB/100m |
| | 200 MHz | ≤ 40.1 dB/100m |
| Next | 300 MHz | ≤ 50 dB/100m |
| | 600 MHz | ≤ 73.3 dB/100m |
| | 1 MHz | ≥ 80 dB |
| | 4 MHz | ≥ 80 dB |
| | 10 MHz | ≥ 80 dB |
| | 16 MHz | ≥ 80 dB |
| | 20 MHz | ≥ 80 dB |
| | 31.25 MHz | ≥ 80 dB |
| | 62.5 MHz | ≥ 75.1 dB |
| | 100 MHz | ≥ 72.4 dB |
| PSNext | 155 MHz | ≥ 69.6 dB |
| | 200 MHz | ≥ 67.9 dB |
| | 300 MHz | ≥ 65.3 dB |
| | 600 MHz | ≥ 60.8 dB |
| | 1 MHz | ≥ 80 dB |
| | 4 MHz | ≥ 80 dB |
| | 10 MHz | ≥ 74 dB |
| | 16 MHz | ≥ 69.6 dB |
| | 20 MHz | ≥ 68 dB |
| | 31.25 MHz | ≥ 64.1 dB |
| Return Loss | 62.5 MHz | ≥ 58.1 dB |
| | 100 MHz | ≥ 54 dB |
| | 155 MHz | ≥ 50.2 dB |
| | 200 MHz | ≥ 48 dB |
| | 300 MHz | ≥ 44.5 dB |
| | 600 MHz | ≥ 38.4 dB |
| | 1 MHz | ≤ 20 dB/100m |
| | 4 MHz | ≤ 23.1 dB/100m |
| | 10 MHz | ≤ 25.0 dB/100m |
| | 16 MHz | ≤ 25.0 dB/100m |
| 20 MHz | ≤ 25.0 dB/100m | |
| 31.25 MHz | ≤ 23.6 dB/100m | |
| 62.5 MHz | ≤ 21.5 dB/100m | |
| 100 MHz | ≤ 20.1 dB/100m | |
| 155 MHz | ≤ 18.8 dB/100m | |
| 200 MHz | ≤ 17.3 dB/100m | |
| 300 MHz | ≤ 17.3 dB/100m | |
| 600 MHz | ≤ 17.3 dB/100m | |

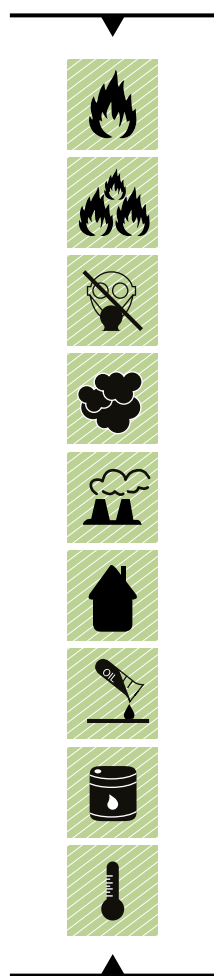

CABLE SPECIFICATIONS


| | |
|-----------------------|---|
| Conductor | Stranded bare copper AWG23 |
| Insulation | Foam Polyolefin |
| Pair Colours | White-Blue; White-Orange; White-Green; White-Brown |
| Pair Screen | Aluminium/Mylar tape |
| Assembling | 4 pairs + eventual filler and tape are assembled together |
| Overall Screen | Tinned copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 125 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10 xØ |

FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

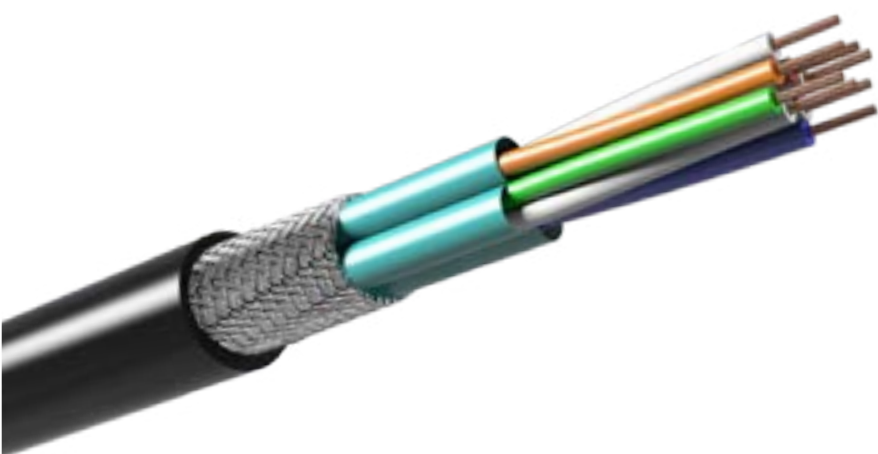


MAIN FEATURES

| TK-S/FTP 4X2XAWG23 CAT.7 | |
|---------------------------------|--------------------------|
| Conductor resistance | ≤ 69.5 Ω/km |
| Insulation resistance | ≥ 500 MΩxkm |
| Test voltage | 700 V |
| Characteristic Impedance" | @ 1 ÷ 100 MHz 100 ± 15 Ω |
| Transfer Impedance | @ ≤ 1 MHz ≤ 10 mΩ/m |
| | @ ≤ 10 MHz ≤ 15 mΩ/m |
| | @ ≤ 30 MHz ≤ 30 mΩ/m |
| Mutual capacitance | ≤ 43 pF/m |
| Nominal Velocity of Propagation | 78% |
| Nominal weight | 91 kg/km |
| Nominal diameter | 8.8 mm |

| TK-S/FTP 4X2XAWG23 CAT.7 | | |
|--------------------------|-----------|----------------|
| Attenuation | 1 MHz | ≤ 2.9 dB/100m |
| | 4 MHz | ≤ 5.5 dB/100m |
| | 10 MHz | ≤ 8.5 dB/100m |
| | 16 MHz | ≤ 10.8 dB/100m |
| | 20 MHz | ≤ 12.1 dB/100m |
| | 31.25 MHz | ≤ 15.2 dB/100m |
| | 62.5 MHz | ≤ 21.7 dB/100m |
| | 100 MHz | ≤ 27.8 dB/100m |
| | 155 MHz | ≤ 35 dB/100m |
| | 200 MHz | ≤ 40.1 dB/100m |
| | 300 MHz | ≤ 50 dB/100m |
| | 600 MHz | ≤ 73.3 dB/100m |
| Next | 1 MHz | ≥ 80 dB |
| | 4 MHz | ≥ 80 dB |
| | 10 MHz | ≥ 80 dB |
| | 16 MHz | ≥ 80 dB |
| | 20 MHz | ≥ 80 dB |
| | 31.25 MHz | ≥ 80 dB |
| | 62.5 MHz | ≥ 75.1 dB |
| | 100 MHz | ≥ 72.4 dB |
| | 155 MHz | ≥ 69.6 dB |
| | 200 MHz | ≥ 67.9 dB |
| | 300 MHz | ≥ 65.3 dB |
| | 600 MHz | ≥ 60.8 dB |
| PSNext | 1 MHz | ≥ 80 dB |
| | 4 MHz | ≥ 80 dB |
| | 10 MHz | ≥ 74 dB |
| | 16 MHz | ≥ 69.6 dB |
| | 20 MHz | ≥ 68 dB |
| | 31.25 MHz | ≥ 64.1 dB |
| | 62.5 MHz | ≥ 58.1 dB |
| | 100 MHz | ≥ 54 dB |
| | 155 MHz | ≥ 50.2 dB |
| | 200 MHz | ≥ 48 dB |
| | 300 MHz | ≥ 44.5 dB |
| | 600 MHz | ≥ 38.4 dB |
| Return Loss | 1 MHz | ≤ 20 dB/100m |
| | 4 MHz | ≤ 23.1 dB/100m |
| | 10 MHz | ≤ 25.0 dB/100m |
| | 16 MHz | ≤ 25.0 dB/100m |
| | 20 MHz | ≤ 25.0 dB/100m |
| | 31.25 MHz | ≤ 23.6 dB/100m |
| | 62.5 MHz | ≤ 21.5 dB/100m |
| | 100 MHz | ≤ 20.1 dB/100m |
| | 155 MHz | ≤ 18.8 dB/100m |
| | 200 MHz | ≤ 17.3 dB/100m |
| | 300 MHz | ≤ 17.3 dB/100m |
| | 600 MHz | ≤ 17.3 dB/100m |

| | | | |
|-------------------------------|-----------------------------|---|---|
| | CABLE SPECIFICATIONS | Conductor | Stranded bare copper AWG23 |
| | | Insulation | Foam Polyolefin |
| | | Pair Colours | White-Blue; White-Orange; White-Green; White-Brown |
| | Pair Colours | Aluminium/Mylar tape | |
| | Assembling | 4 pairs + eventual filler and tape are assembled together | |
| | Overall Screen | Tinned copper braid | |
| | Sheath | Crosslinked material type EM 104, flame retardant, halogen free black | |
| | TECHNICAL DATA | Operating Voltage | 125 V |
| | | Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | | 7xØ | |
| FIRE PERFORMANCE | Fire propagation | EN 60332-1-2 EN 50266-2-5 | |
| | Smoke density | EN 61034-1/2 | |
| | Halogen-free | EN 50267-2-1/2 | |
| | Fumes | No corrosive and toxic fumes | |


Also available for jumper version

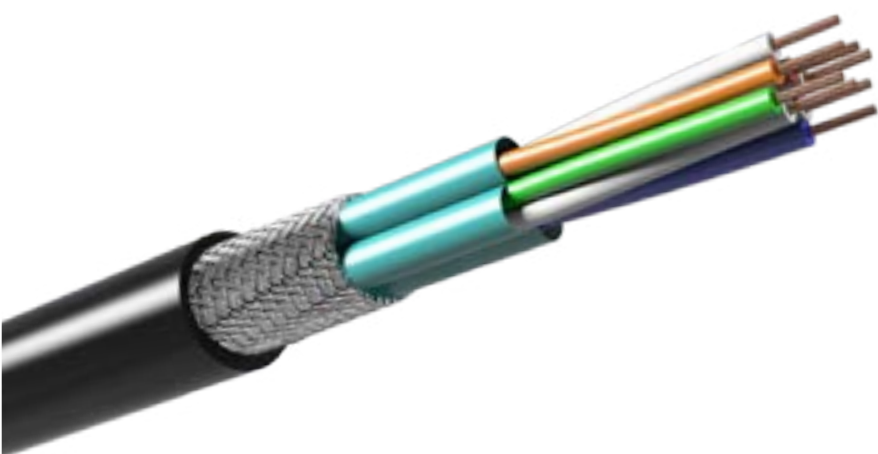


MAIN FEATURES

| TK-S/FTP 4X2XAWG23 CAT.7A | |
|----------------------------------|-------------------------|
| Conductor resistance [Ω/km] | ≤ 69.5 Ω/km |
| Insulation resistance [MΩxkm] | ≥ 500 MΩxkm |
| Test voltage [V] | 700 V |
| Characteristic Impedance" | @ 1÷ 100 MHz 100 ± 10 Ω |
| Transfer Impedance | @ ≤ 1 MHz ≤ 10 mΩ/m |
| | @ ≤ 10 MHz ≤ 10 mΩ/m |
| | @ ≤ 30 MHz ≤ 30 mΩ/m |
| | @ ≤ 100 MHz ≤ 100 mΩ/m |
| Mutual capacitance [pF/m] | ≤ 43 pF/m |
| Nominal Velocity of Propagation | 78% |
| Nominal weight [kg/km] | 105 kg/km |
| Nominal diameter [mm] | 9.2 mm |

| TK-S/FTP 4X2XAWG23 CAT.7A | | |
|---------------------------|-----------------|-----------------|
| Attenuation | 1 MHz | ≤ 3.01 dB/100m |
| | 4 MHz | ≤ 5.38 dB/100m |
| | 10 MHz | ≤ 8.71 dB/100m |
| | 16 MHz | ≤ 11.0 dB/100m |
| | 20 MHz | ≤ 12.29 dB/100m |
| | 62.5 MHz | ≤ 21.785dB/100m |
| | 100 MHz | ≤ 27.78 dB/100m |
| | 200 MHz | ≤ 39.70 dB/100m |
| | 300 MHz | ≤ 49.03 dB/100m |
| | 600 MHz | ≤ 70.65 dB/100m |
| Next | 800 MHz | ≤ 82.38 dB/100m |
| | 1000 MHz | ≤ 92.89 dB/100m |
| | 1 MHz | ≥ 78 dB |
| | 4 MHz | ≥ 78 dB |
| | 10 MHz | ≥ 78 dB |
| | 16 MHz | ≥ 78 dB |
| | 20 MHz | ≥ 78 dB |
| | 62.5 MHz | ≥ 78 dB |
| | 100 MHz | ≥ 78 dB |
| | 200 MHz | ≥ 73.88 dB |
| PSNext | 300 MHz | ≥ 71.24 dB |
| | 600 MHz | ≥ 66.73 dB |
| | 800 MHz | ≥ 64.85 dB |
| | 1000 MHz | ≥ 63.40 dB |
| | 1 MHz | ≥ 75 dB |
| | 4 MHz | ≥ 75 dB |
| | 10 MHz | ≥ 75 dB |
| | 16 MHz | ≥ 75 dB |
| | 20 MHz | ≥ 75 dB |
| | 62.5 MHz | ≥ 75 dB |
| Return Loss | 100 MHz | ≥ 75 dB |
| | 200 MHz | ≥ 70.88 dB |
| | 300 MHz | ≥ 68.24 dB |
| | 600 MHz | ≥ 63.73 dB |
| | 800 MHz | ≥ 61.85 dB |
| | 1000 MHz | ≥ 60.40 dB |
| | 1 MHz | ≤ 20 dB/100m |
| | 4 MHz | ≤ 23.1 dB/100m |
| | 10 MHz | ≤ 25.0 dB/100m |
| | 16 MHz | ≤ 25.0 dB/100m |
| 20 MHz | ≤ 25.0 dB/100m | |
| 62.5 MHz | ≤ 20.74 dB/100m | |
| 100 MHz | ≤ 18.99 dB/100m | |
| 200 MHz | ≤ 16.4 dB/100m | |
| 300 MHz | ≤ 15.6 dB/100m | |
| 600 MHz | ≤ 15.6 dB/100m | |
| 800 MHz | ≤ 15.6 dB/100m | |
| 1000 MHz | ≤ 15.6 dB/100m | |

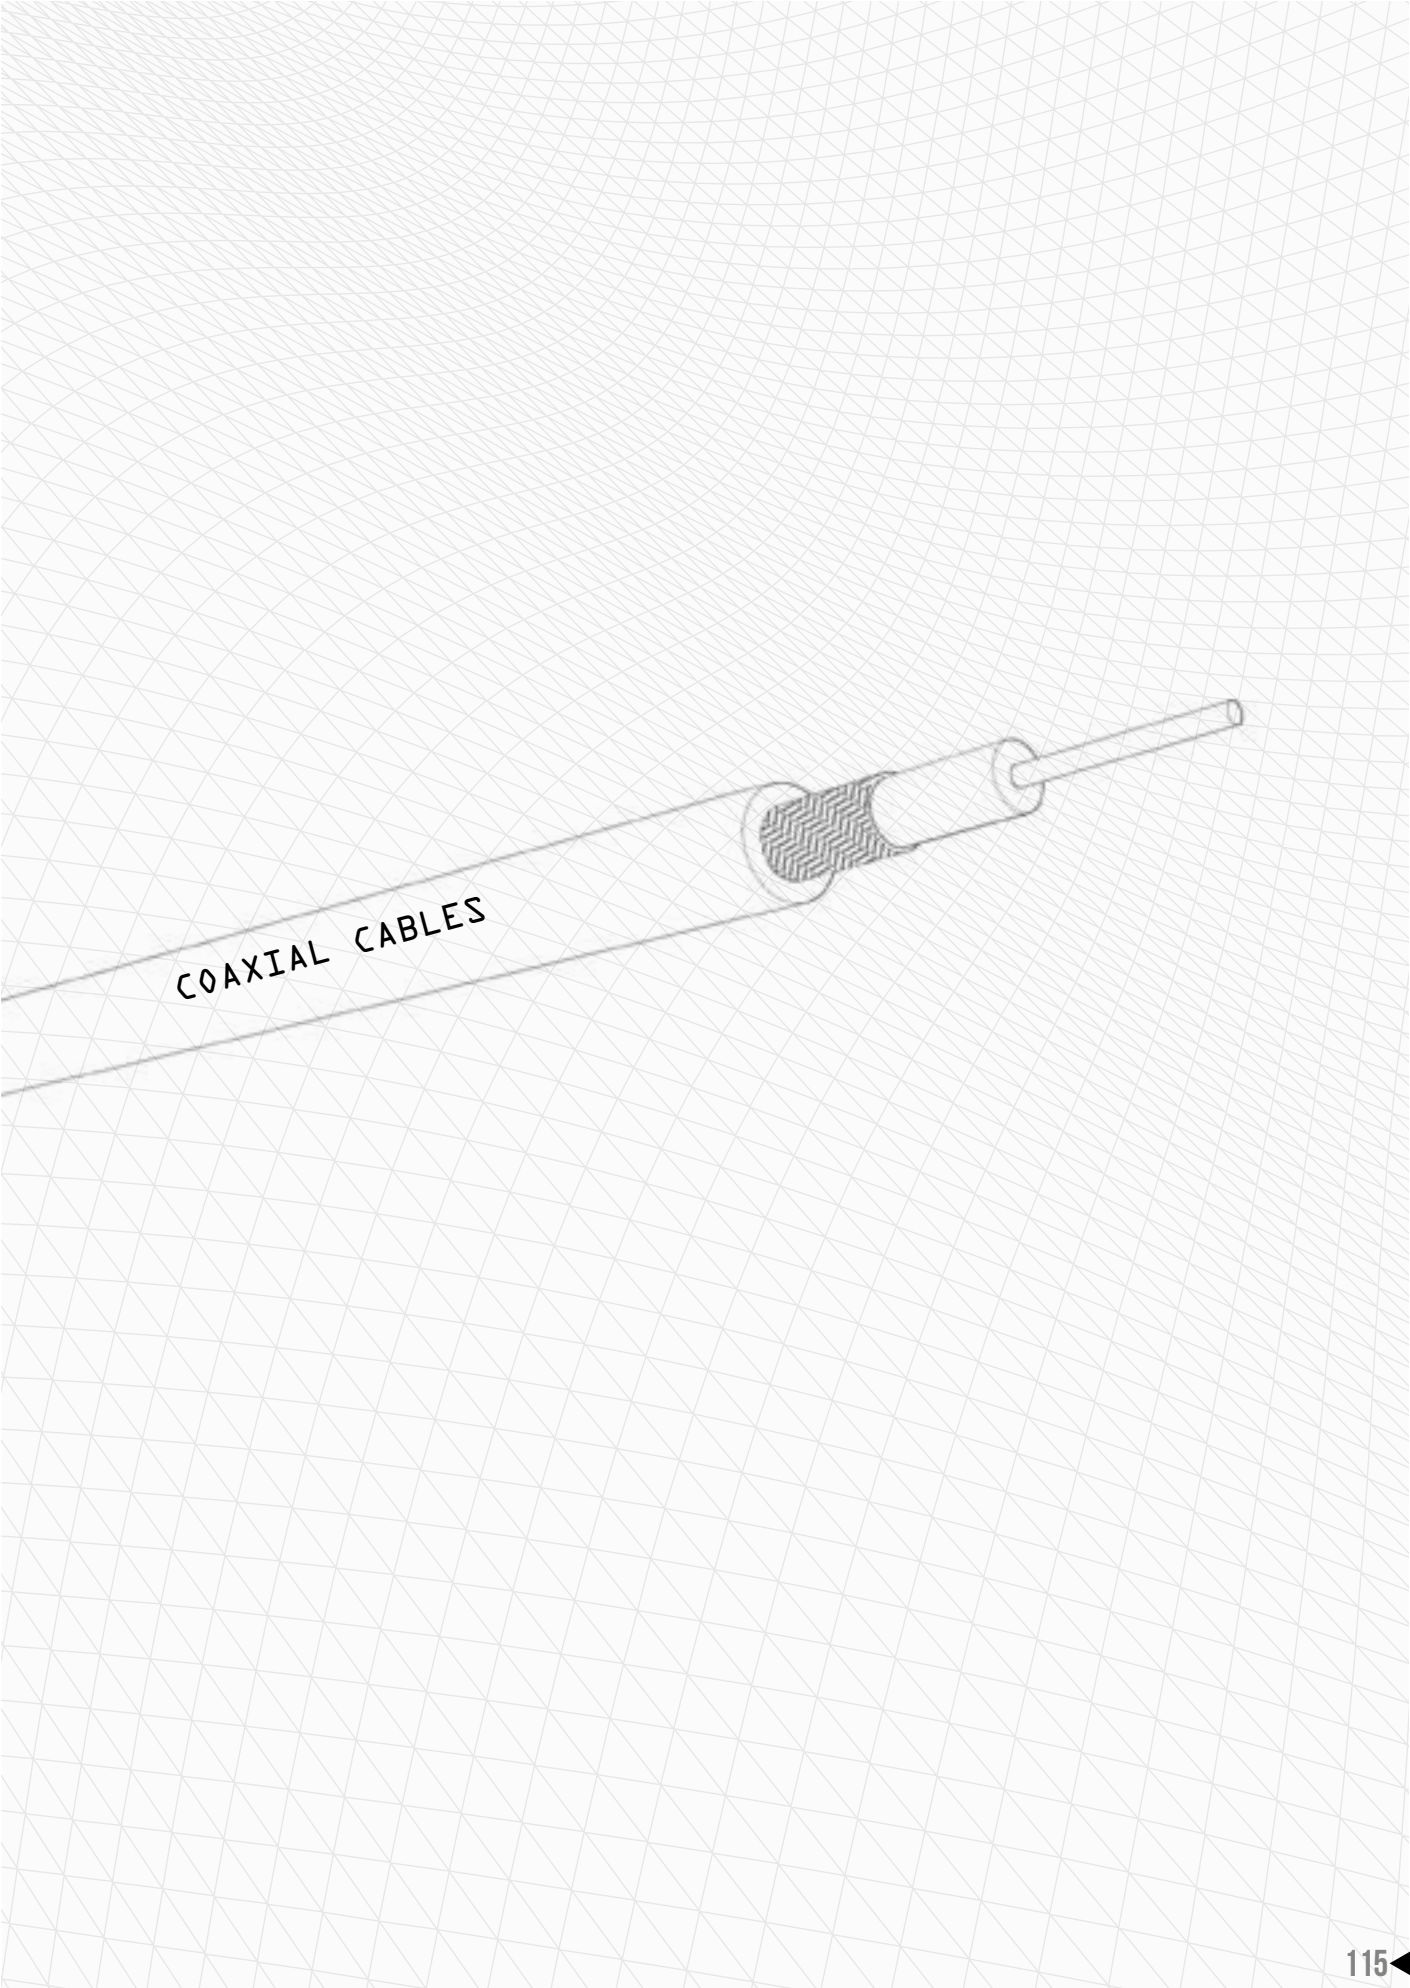

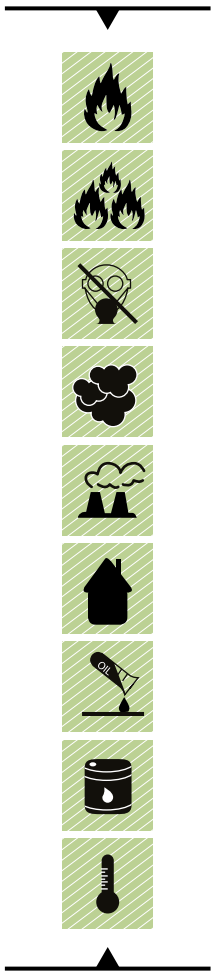

CABLE SPECIFICATIONS

| | |
|-------------------|---|
| Conductor | Stranded bare copper 7x0.75 mm |
| Insulation | Polyethylene |
| Screen | Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 3700 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | |
|--|---------------------------|
| Conductor resistance | ≤ 5.77 Ω/km |
| Test voltage | 10000 V |
| Characteristic Impedance | 50 ± 2 Ω |
| Mutual capacitance | ≤ 105 pF/m |
| Nominal Velocity of Propagation | 66% |
| Attenuation | @ 10 MHz ≤ 1.80 dB/100m |
| | @ 200 MHz ≤ 8.86 dB/100m |
| | @ 400 MHz ≤ 13.5 dB/100m |
| | @ 3000 MHz ≤ 52.5 dB/100m |
| Nominal weight | 160 kg/km |
| Nominal diameter | 10.30 mm |



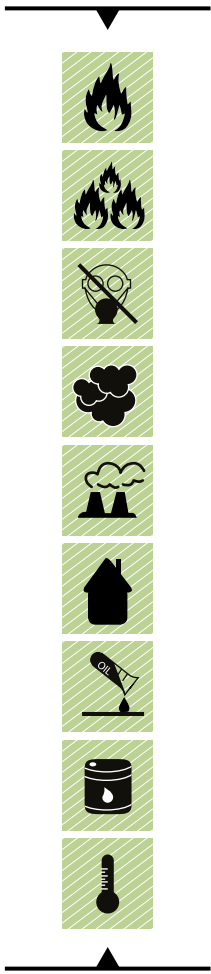

CABLE SPECIFICATIONS

| | |
|----------------------|---|
| Conductor | Silver copper 0.9 mm |
| Insulation | Polyethylene |
| First Screen | Silver Copper braid |
| Second Screen | Silver Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 1900 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|--------------|----------------|
| Conductor resistance | ≤ 29.43 Ω/km | |
| Test voltage | 5000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 105 pF/m | |
| Nominal Velocity of Propagation | 66% | |
| Attenuation | @ 10 MHz | ≤ 7 dB/100m |
| | @ 50 MHz | ≤ 15.7 dB/100m |
| | @ 100 MHz | ≤ 27 dB/100m |
| | @ 400 MHz | ≤ 39 dB/100m |
| | @ 1000 MHz | ≤ 68.9 dB/100m |
| Nominal weight | 55 kg/km | |
| Nominal diameter | 5.4 mm | |



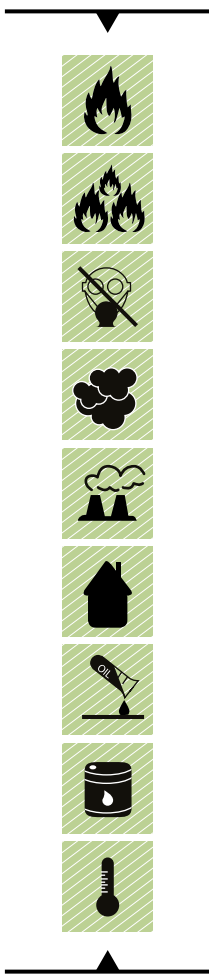

CABLE SPECIFICATIONS

| | |
|-------------------|---|
| Conductor | Stranded Silver copperweld 7x0.16 mm |
| Insulation | Special thermoplastic polymer |
| Screen | Silver Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|--------------|----------------|
| Conductor resistance | ≤ 276.0 Ω/km | |
| Test voltage | 2000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 95 pF/m | |
| Nominal Velocity of Propagation | 70% | |
| Attenuation | @ 10 MHz | ≤ 19.7 dB/100m |
| | @ 50 MHz | ≤ 24.6 dB/100m |
| | @ 100 MHz | ≤ 36 dB/100m |
| | @ 400 MHz | ≤ 68.9 dB/100m |
| | @ 1000 MHz | ≤ 102 dB/100m |
| | @ 3000 MHz | ≤ 205 dB/100m |
| Nominal weight | 15 kg/km | |
| Nominal diameter | 3.1 mm | |



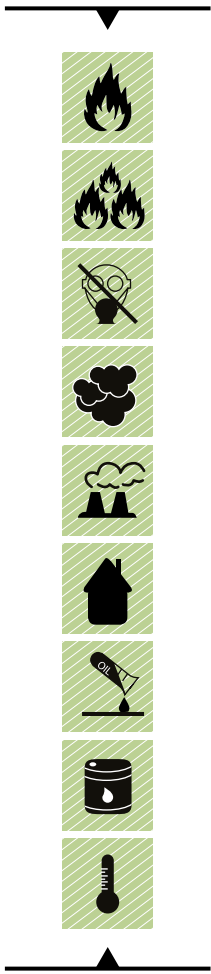

CABLE SPECIFICATIONS

| | |
|----------------------|---|
| Conductor | Stranded Silver copper 19x0.20 mm |
| Insulation | Special thermoplastic polymer |
| First Screen | Tinned Copper braid |
| Second Screen | Tinned Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 750 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|-------------|-----------------|
| Conductor resistance | ≤ 30.0 Ω/km | |
| Test voltage | 2000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 100 pF/m | |
| Nominal Velocity of Propagation | 71% | |
| Attenuation | @ 400 MHz | ≤ 31.3 dB/100m |
| | @ 3000 MHz | ≤ 100.7 dB/100m |
| Nominal weight | 50 kg/km | |
| Nominal diameter | 4.95 mm | |



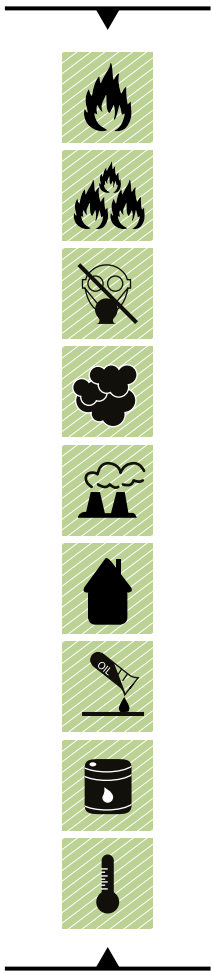

CABLE SPECIFICATIONS

| | |
|-------------------|---|
| Conductor | Stranded tinned copper 19x0.18 mm |
| Insulation | Polyethylene |
| Screen | Tinned Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 2000 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|-------------|----------------|
| Conductor resistance | ≤ 48.0 Ω/km | |
| Test voltage | 5000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 100 pF/m | |
| Nominal Velocity of Propagation | 66% | |
| Attenuation | @ 50 MHz | ≤ 11.5 dB/100m |
| | @ 100 MHz | ≤ 20 dB/100m |
| | @ 200 MHz | ≤ 24.3 dB/100m |
| | @ 400 MHz | ≤ 62 dB/100m |
| | @ 1000 MHz | ≤ 39.4 dB/100m |
| Nominal weight | 40 kg/km | |
| Nominal diameter | 4.95 mm | |



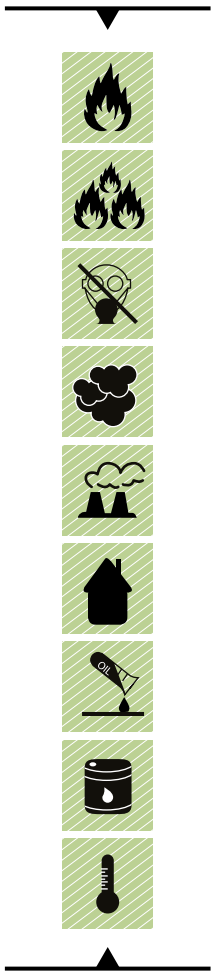

CABLE SPECIFICATIONS

| | |
|----------------------|---|
| Conductor | Stranded Silver copper 7x0.75 mm |
| Insulation | XLPE |
| First Screen | Silver Copper braid |
| Second Screen | Silver Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 1400 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|------------|----------------|
| Conductor resistance | ≤ 6.0 Ω/km | |
| Test voltage | 10000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 100 pF/m | |
| Nominal Velocity of Propagation | 66% | |
| Attenuation | @ 50 MHz | ≤ 4.7 dB/100m |
| | @ 100 MHz | ≤ 7.1 dB/100m |
| | @ 200 MHz | ≤ 10.4 dB/100m |
| | @ 500 MHz | ≤ 17.4 dB/100m |
| | @ 1000 MHz | ≤ 26.2 dB/100m |
| | @ 3000 MHz | ≤ 55 dB/100m |
| Nominal weight | 205 kg/km | |
| Nominal diameter | 10.8 mm | |



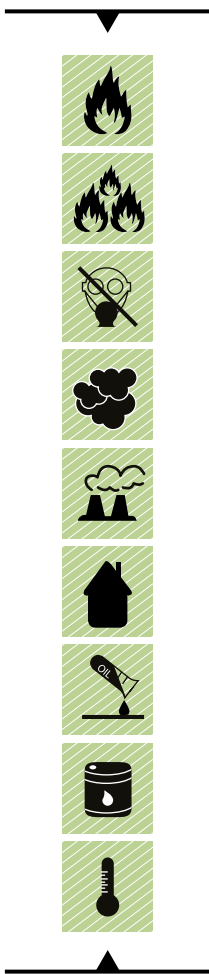

CABLE SPECIFICATIONS

| | |
|----------------------|---|
| Conductor | Silver copperweld 0.95 mm |
| Insulation | Special thermoplastic polymer |
| First Screen | Silver Copper braid |
| Second Screen | Silver Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 2500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|--------------|---------------|
| Conductor resistance | ≤ 63.97 Ω/km | |
| Test voltage | 5000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 100 pF/m | |
| Nominal Velocity of Propagation | 72% | |
| Attenuation | @ 300 MHz | ≤ 27 dB/100m |
| | @ 600 MHz | ≤ 40 dB/100m |
| | @ 900 MHz | ≤ 51 dB/100m |
| | @ 1200 MHz | ≤ 61 dB/100m |
| | @ 1500 MHz | ≤ 69 dB/100m |
| | @ 3000 MHz | ≤ 107 dB/100m |
| Nominal weight | 60 kg/km | |
| Nominal diameter | 5.0 mm | |



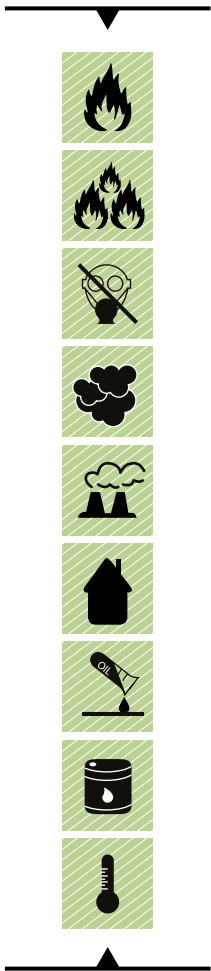

CABLE SPECIFICATIONS

| | |
|-------------------|---|
| Conductor | Stranded copperweld 7x0.16 mm |
| Insulation | Polyethylene |
| Screen | Tinned Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 750 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|--------------|----------------|
| Conductor resistance | ≤ 290.0 Ω/km | |
| Test voltage | 2000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 100 pF/m | |
| Nominal Velocity of Propagation | 66% | |
| Attenuation | @ 50 MHz | ≤ 17.5 dB/100m |
| | @ 100 MHz | ≤ 25.8 dB/100m |
| | @ 200 MHz | ≤ 38.2 dB/100m |
| | @ 400 MHz | ≤ 54.9 dB/100m |
| | @ 600 MHz | ≤ 68.6 dB/100m |
| | @ 860 MHz | ≤ 81.2 dB/100m |
| | @ 1000 MHz | ≤ 87.5 dB/100m |
| Nominal weight | 12.5 kg/km | |
| Nominal diameter | 2.80 mm | |



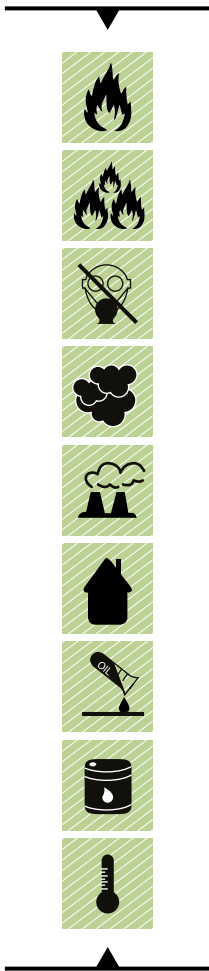

CABLE SPECIFICATIONS

| | |
|----------------------|---|
| Conductor | Stranded tinned copper 19x0.30 mm |
| Insulation | Special thermoplastic polymer |
| Screen | Aluminium/ Mylar / Aluminium tape |
| Second Screen | Tinned Copper braid (with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 750 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|-------------|----------------|
| Conductor resistance | ≤ 30.0 Ω/km | |
| Test voltage | 2000 V | |
| Characteristic Impedance | 50 ± 2 Ω | |
| Mutual capacitance | ≤ 82 pF/m | |
| Nominal Velocity of Propagation | 81% | |
| Attenuation | @ 50 MHz | ≤ 6.5 dB/100m |
| | @ 100 MHz | ≤ 9.3 dB/100m |
| | @ 300 MHz | ≤ 16.3 dB/100m |
| | @ 400 MHz | ≤ 19.0 dB/100m |
| | @ 860 MHz | ≤ 28.5 dB/100m |
| | @ 1000 MHz | ≤ 30.9 dB/100m |
| Nominal weight | 50 kg/km | |
| Nominal diameter | 5.4 mm | |



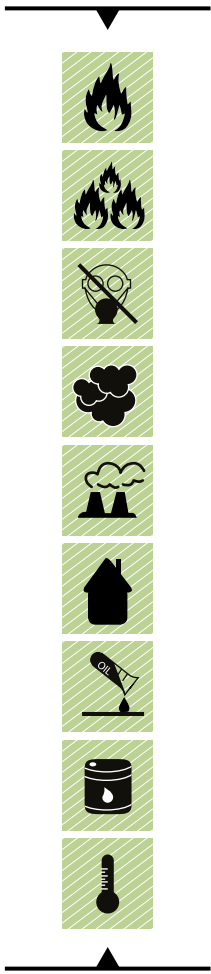

CABLE SPECIFICATIONS

| | |
|-------------------|---|
| Conductor | Stranded tinned copper 19x0.20 mm |
| Insulation | Foam Polyolefin |
| Screen | Tinned Copper braid with eventual tape) |
| Sheath | Cross-linked Material type EM104, Flame Retardant, Halogen Free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE

| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| | | |
|--|-----------------|-----------------|
| Conductor resistance | ≤ 33.2 Ω/km | |
| Test voltage | 2000 V | |
| Characteristic Impedance | 75 ± 3 Ω | |
| Mutual capacitance | ≤ 56 pF/m | |
| Nominal Velocity of Propagation | 78% | |
| Attenuation | @ 5 MHz | ≤ 2.20 dB/100m |
| | @ 10 MHz | ≤ 3.20 dB/100m |
| | @ 50 MHz | ≤ 7.90 dB/100m |
| | @ 100 MHz | ≤ 11.20 dB/100m |
| | @ 200 MHz | ≤ 16.10 dB/100m |
| | @ 400 MHz | ≤ 23.30 dB/100m |
| @ 1000 MHz | ≤ 39.40 dB/100m | |
| Nominal weight | 65 kg/km | |
| Nominal diameter | 6.15 mm | |



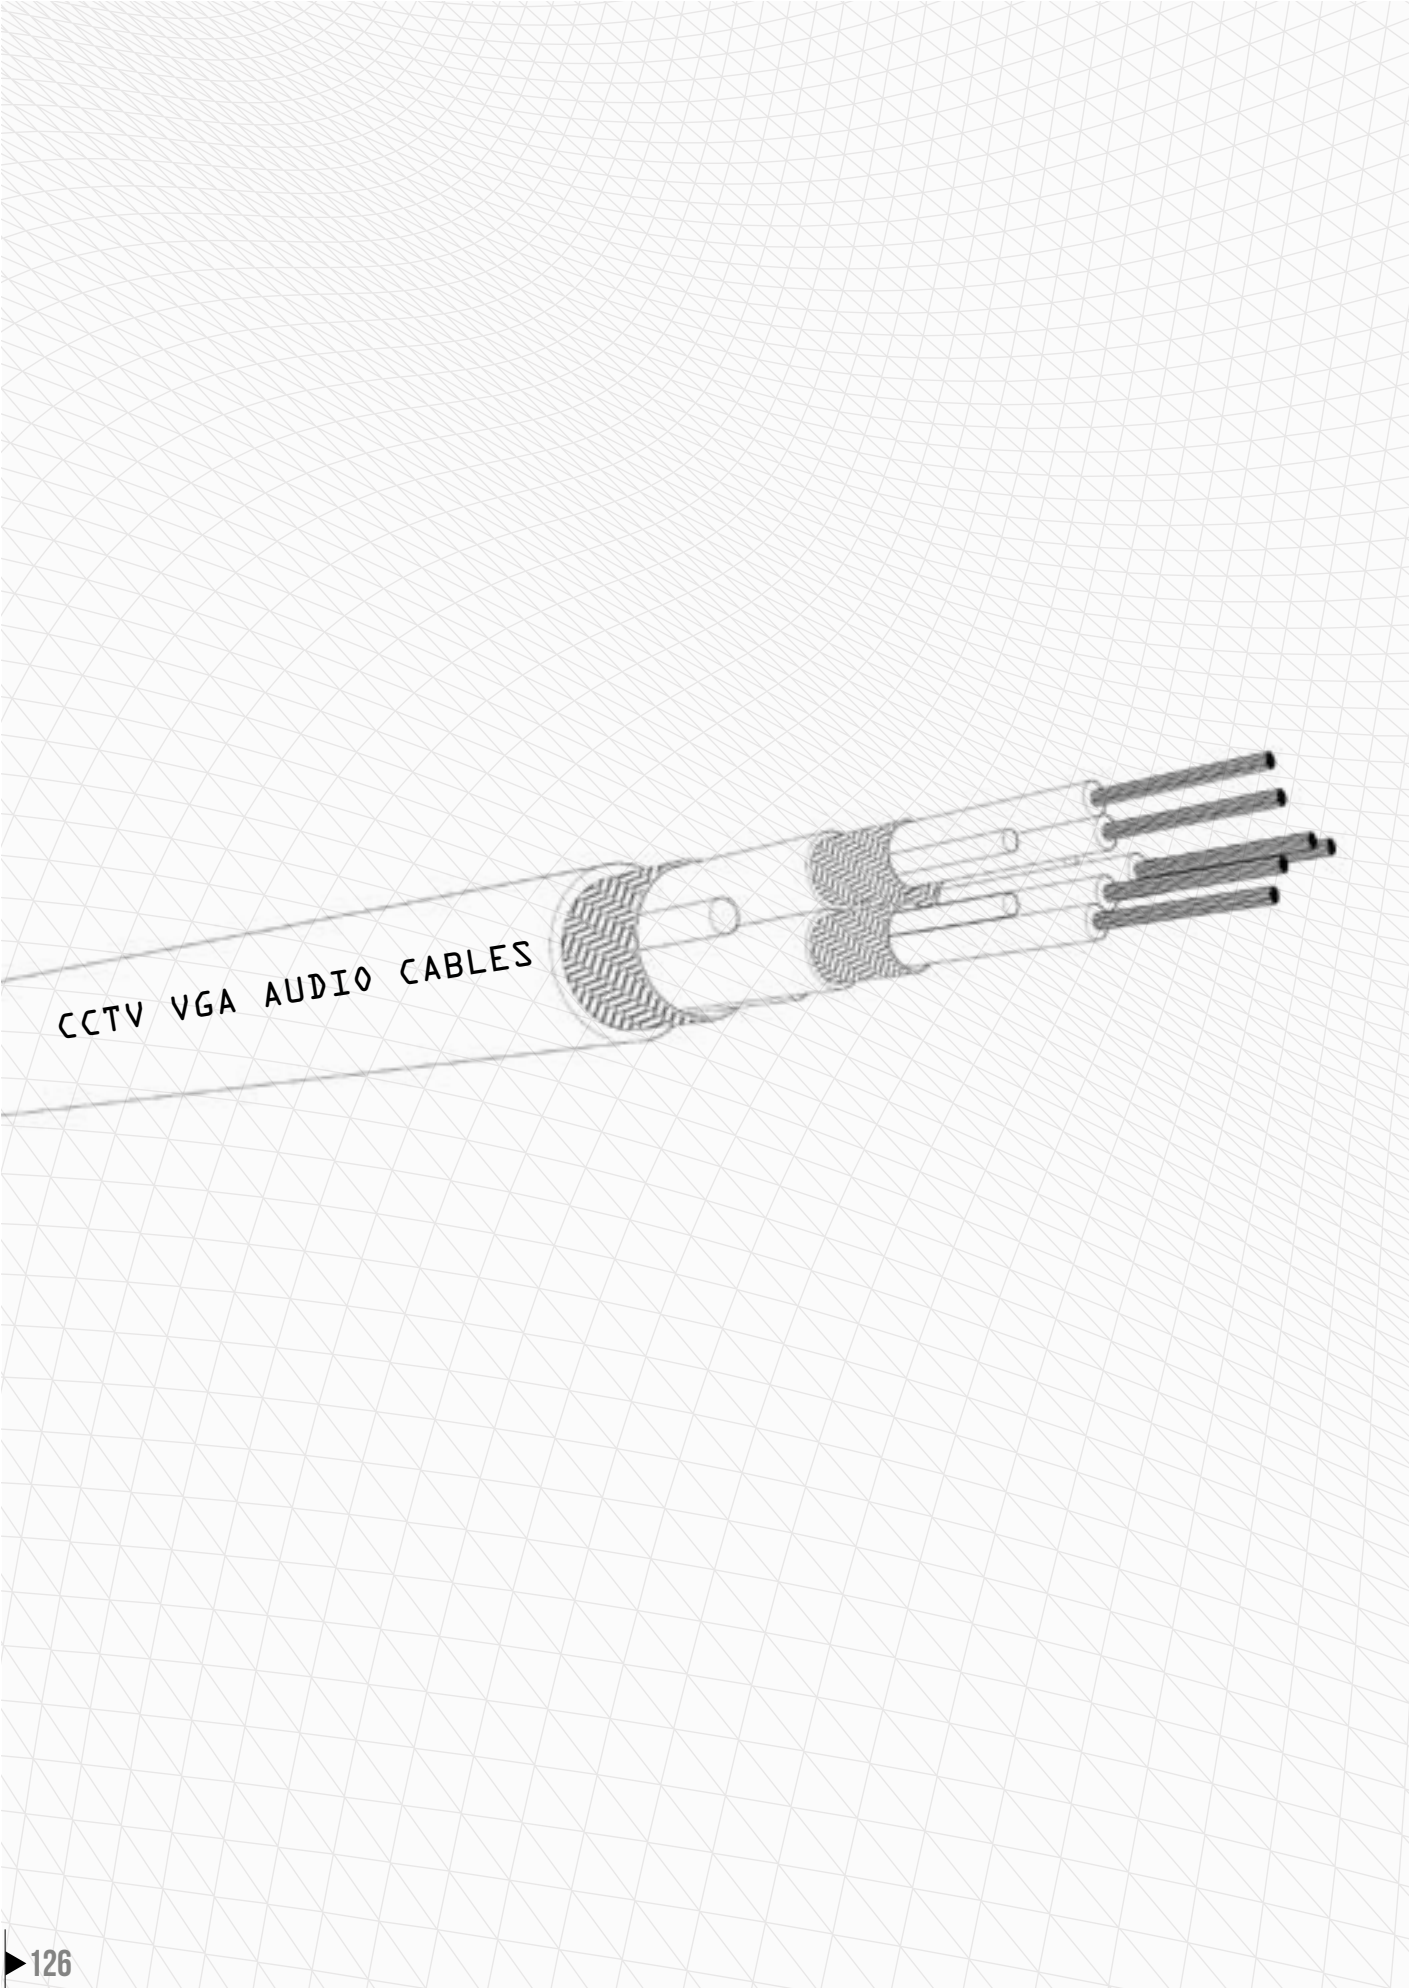

CABLE SPECIFICATIONS



Coax

COAX

Stranded tinned copper AWG28 (7x0.127) mm

Insulation

Special thermoplastic polymer

Screen

Tinner copper braid

Sheath

Crosslinked material type EM 104, flame retardant, halogen free Red-Green-Blue

AWG26

Coax

Stranded tinned copper AWG26 (7x0.16) mm

Insulation

Cross-linked Material type EI105

Colours

White-Orange-Brown

Total assembling

3 coax + 3 xA26WG + eventual filler and tape are assembled together

Total Screen

Tinner copper braid

Total Sheath

Crosslinked material type EM 104, flame retardant, halogen free Grey

TECHNICAL DATA

Operating Voltage

30 V

Operating temperature

-40°C ÷ +90°C

Minimum bending radius

10xØ

FIRE PERFORMANCE

Fire propagation

EN 60332-1-2
EN 50266-2-5

Smoke density


EN 61034-1/2

Halogen-free

EN 50267-2-1/2

Fumes

No corrosive and toxic fumes

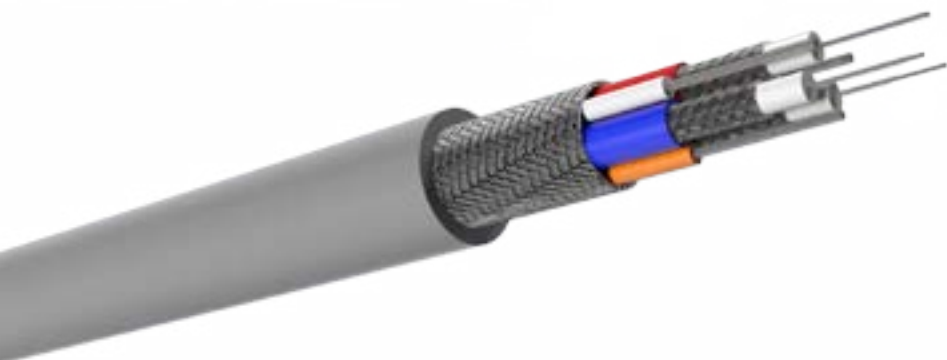

MAIN FEATURES

| TK-CCTV / VGA 3 COAX 75 Ω+3xAWG26 | |
|---|--|
| Conductor resistance | ≤ 230.0 Ω/km (AWG28) ≤ 140.0 Ω/km (AWG26) |
| Insulation resistance | ≥ 500 MΩxkm |
| Test voltage | 1000 V |
| Characteristic Impedance @ 1 MHz | 75 ± 10 Ω* |
| Mutual capacitance | ≤ 56 pF/m |
| Nominal Velocity of Propagation | 80% |
| Nominal weight | 115 kg/km |
| Nominal diameter | 8.8 mm |

*Only for Coax

CABLE SPECIFICATIONS



| | |
|--------------------|---|
| Conductor | Stranded tinned copper 0.60 mm ² |
| Insulation | Special thermoplastic polymer |
| Colours | White-Blue; White-Orange; White-Green |
| Pair screen | Tinned copper braid |
| Pair sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |
| Assembling | 3 elements + eventual filler and tape are assembled together |
| Screen | Tinner copper braid |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating Voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-4 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |



MAIN FEATURES

| TK-AUDIO 3x(2x0.60) | |
|---|---|
| Conductor resistance | $\leq 37.0 \Omega/\text{km}$ |
| Insulation resistance | $\geq 2500 \text{ M}\Omega\cdot\text{km}$ |
| Test voltage | 2000 V |
| Characteristic Impedance @ 1 MHz | $110 \pm 10 \Omega$ |
| Mutual capacitance | $\leq 50 \text{ pF/m}$ |
| Nominal Velocity of Propagation | 78% |
| Nominal weight | 335 kg/km |
| Nominal diameter | 15.5 mm |

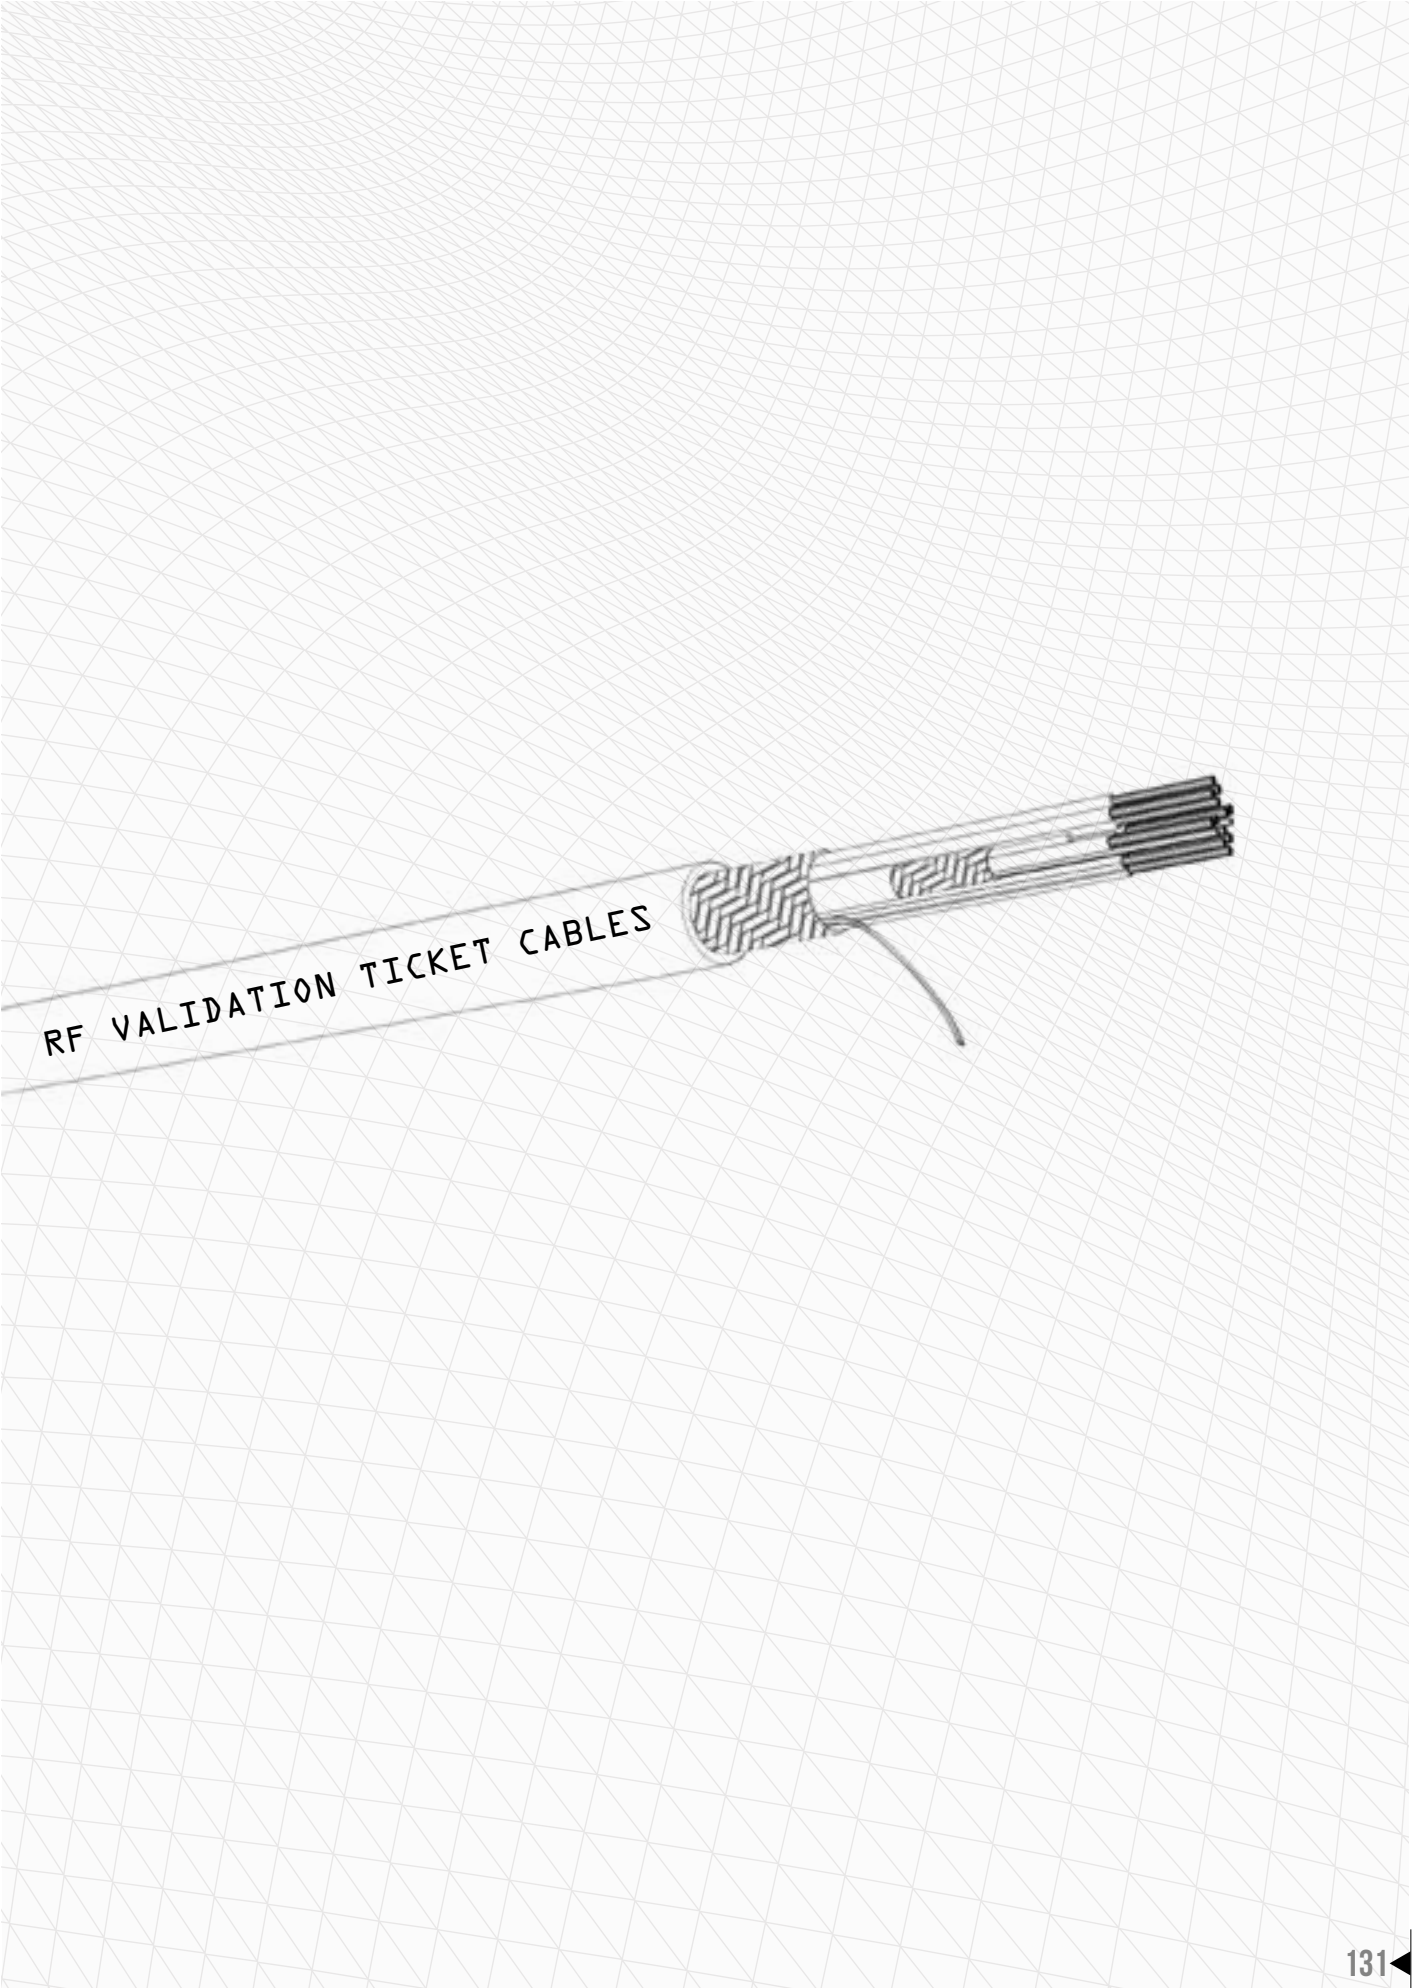

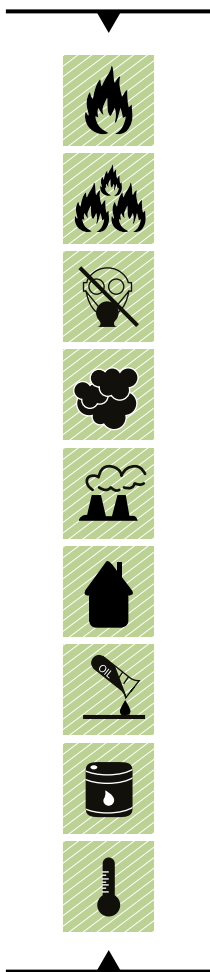

CABLE SPECIFICATIONS

| | |
|-------------------|---|
| Conductor | Stranded tinned copper AWG22 |
| Insulation | Special double layer of oleolefinic insulation according to EN50306 |
| Colors | White-Red |
| Assembling | 2 conductors + eventual filler and tape are assembled together |
| Screen | Tinner copper braid + drain wire |
| Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE

| | |
|-------------------------|--------------------------------|
| Fire propagation | EN 60332-1-2 EN 50305 9.1.2 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| TK-RF VALIDATION TICKET 2xAWG22 | |
|---------------------------------|---------------|
| Conductor resistance | ≤ 55.0 Ω/km |
| Insulation resistance | ≥ 250.0 MΩxkm |
| Test voltage | 2000 V |
| Nominal weight | 40 kg/km |
| Nominal diameter | 5.0 mm |



CABLE SPECIFICATIONS



| | |
|-------------------------|---|
| Conductors | Stranded tinned copper AWG22 |
| Insulation | Special double layer of oleolefinic insulation according to EN50306 |
| Pair Colors | White-Red |
| Pair Screen | Tinned copper braid + drain wire |
| Pair Protection | Syntetic tape |
| OTHER ELEMENTS | |
| Conductors | Stranded tinned copper AWG22 |
| Insulation | Special double layer of oleolefinic insulation according to EN50306 |
| Colours | Black-Orange-Blue-Brown |
| Total assembling | 1 pair and 4 conductors + eventually filler and tape are assembled together |
| Total Screen | Tinner copper braid + drain wire |
| Total Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA

| | |
|-------------------------------|---------------|
| Operating voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C |
| Minimum bending radius | 10xØ |

FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| TK-RF VALIDATION TICKET 4xAWG22+2xAWG22 | |
|---|---------------|
| Conductor resistance | ≤ 55.0 Ω/km |
| Insulation resistance | ≥ 250.0 MΩxkm |
| Test voltage | 2000 V |
| Nominal weight | 90 kg/km |
| Nominal diameter | 7.0 mm |



TK-RF VALIDATION TICKET 8xAWG22+2x(2xAWG22)

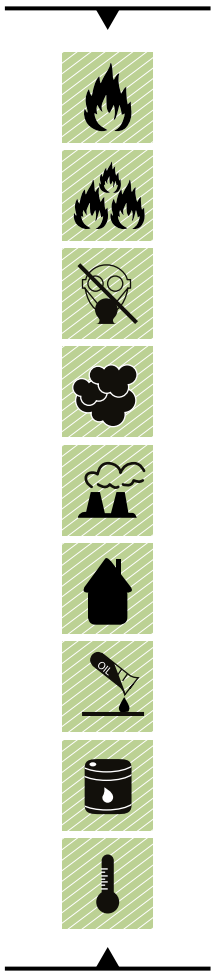

CABLE SPECIFICATIONS

| | |
|-------------------------|---|
| Conductors | SINGLE PAIR SCREENED Stranded tinned copper AWG22 |
| Insulation | Special double layer of oleolefinic insulation according to EN50306 |
| Pair Colors | White-Red; Black-Orange |
| Pair Screen | Tinned copper braid + drain wire |
| Pair Protection | Syntetic tape |
| | OTHER ELEMENTS |
| Conductor | Stranded tinned copper AWG22 |
| Insulation | Special double layer of oleolefinic insulation according to EN50306 |
| Quad Colours | (Blue-Brown-Green-Pink)-(Violet-White/Red-White/Black-White/Orange) |
| Total assembling | 2 pair and 2 quad + eventually filler and tape are assembled together |
| Total Screen | Tinned copper braid + drain wire |
| Total Sheath | Crosslinked material type EM 104, flame retardant, halogen free Black |

TECHNICAL DATA


| | |
|-------------------------------|---------------------------|
| Operating Voltage | 300/500 V |
| Operating temperature | -40°C ÷ +90°C see table 2 |
| Minimum bending radius | 10xØ |


FIRE PERFORMANCE


| | |
|-------------------------|------------------------------|
| Fire propagation | EN 60332-1-2 EN 50266-2-5 |
| Smoke density | EN 61034-1/2 |
| Halogen-free | EN 50267-2-1/2 |
| Fumes | No corrosive and toxic fumes |

MAIN FEATURES

| TK-RF VALIDATION TICKET 8xAWG22+2x(2xAWG22) | |
|---|---------------|
| Conductor resistance | ≤ 55.0 Ω/km |
| Insulation resistance | ≥ 250.0 MΩxkm |
| Test voltage | 2000 V |
| Nominal weight | 170 kg/km |
| Nominal diameter | 10.4 mm |

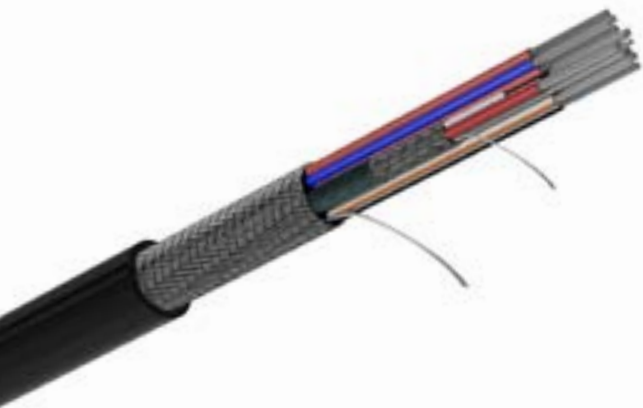

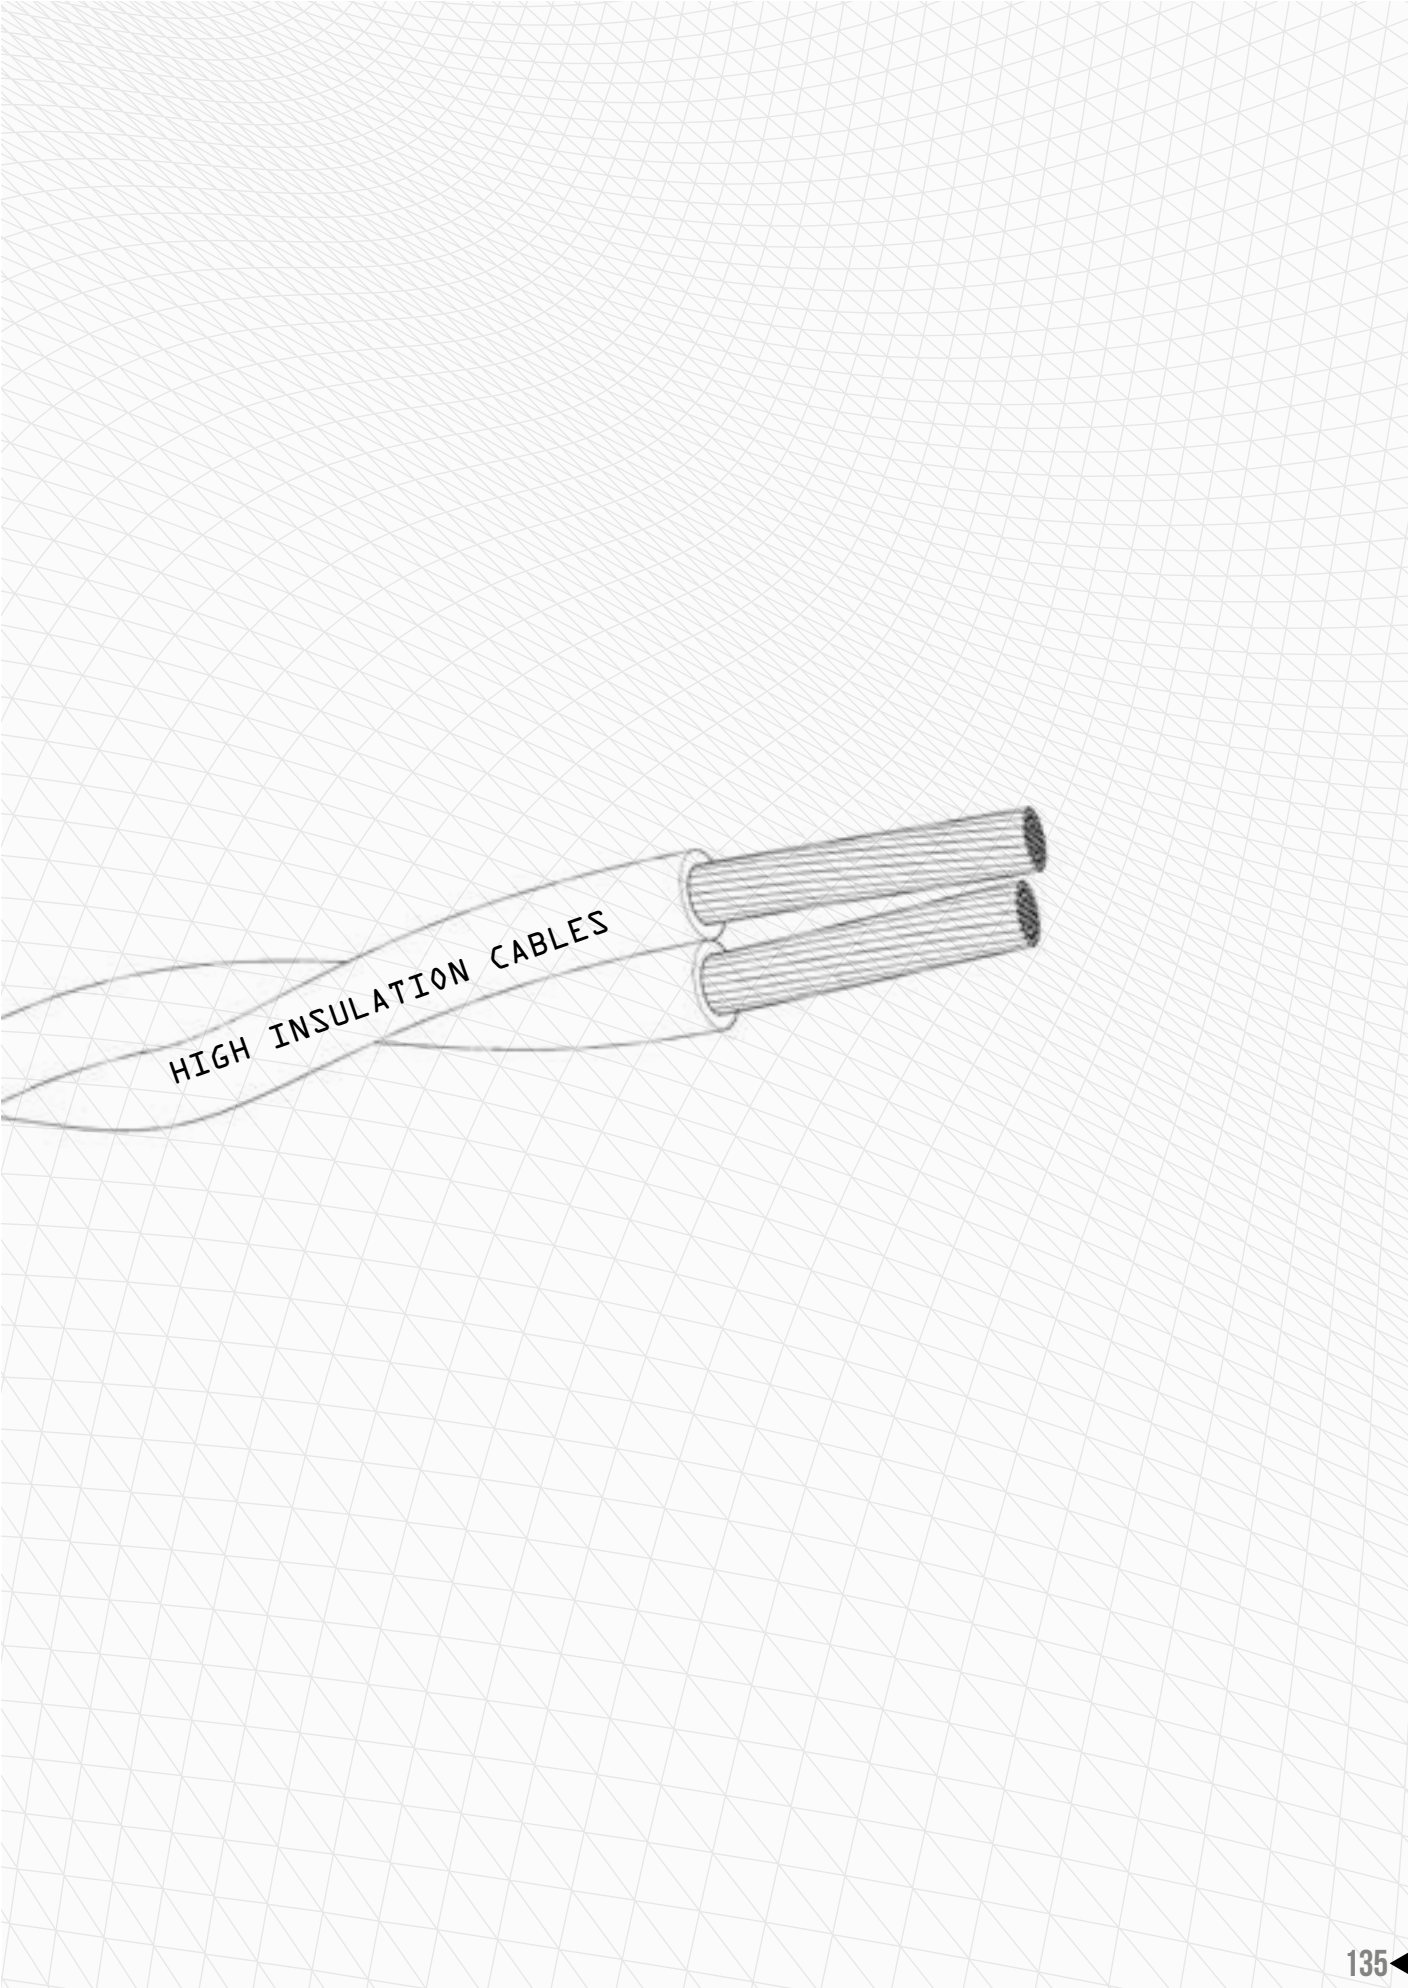

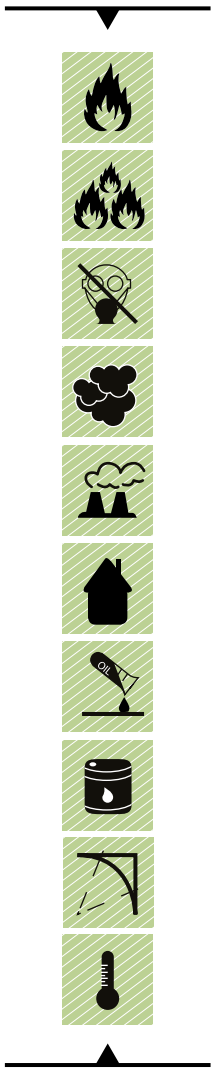

CABLE SPECIFICATIONS

Conductor

Stranded tinned copper 19x0.25 mm (1x1 mm²)
 Stranded tinned copper 37x0.23 mm (1x1.5 mm²)
 Stranded tinned copper 37x0.30 mm (1x2.5 mm²)

Insulation

Special oleolefinic insulation according to EN50306

TECHNICAL DATA

Operating voltage

1.8/3 kV

Operating temperature

-40°C ÷ +105°C

Minimum bending radius

4xØ

FIRE PERFORMANCE

Fire propagation

EN 60332-1-2
 EN 50305 9.1.2

Smoke density

EN 61034-1/2

Halogen-free

EN 50267-2-1/2

Fumes


No corrosive and toxic fumes

MAIN FEATURES

| TK-HIGH INSULATION | | | |
|-------------------------------|---------------------|-----------------------|-----------------------|
| | 1x1 mm ² | 1x1.5 mm ² | 1x2.5 mm ² |
| Voltage rating | 1.8/3 kV | 1.8/3 kV | 1.8/3 kV |
| Test voltage | 6500 V | 6500 V | 6500 V |
| Nominal weight | 12 kg/km | 17 kg/km | 28 kg/km |
| Nominal diameter | 2.1 mm | 2.45 mm | 2.95 mm |
| Minimum bending radius | 4xØ | 4xØ | 4xØ |



TK-MULTICORE HIGH INSULATION

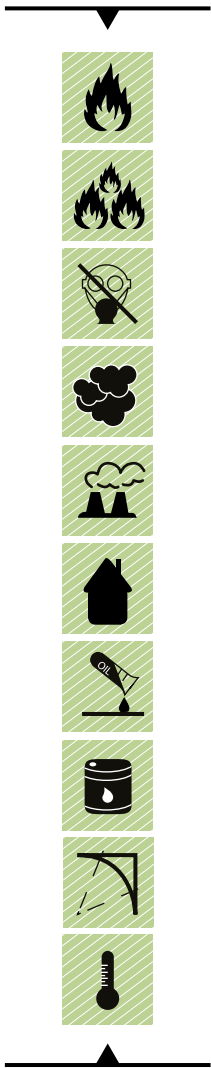

CABLE SPECIFICATIONS

Conductor

Stranded tinned copper 19x0.20mm (2xAWG20)
 Stranded tinned copper 19x0.127mm (2xAWG24)
 Stranded tinned copper 19x0.20mm (3xAWG20)
 Stranded tinned copper 19x0.127mm (3xAWG24)

Insulation

Special oleolefinic insulation according to EN50306

Assembling

Twisted conductors

TECHNICAL DATA

Operating voltage

1.8/3 kV

Operating temperature

-40°C ÷ +105°C

Minimum bending radius

4xØ

FIRE PERFORMANCE

Fire propagation

EN 60332-1-2
 EN 50305 9.1.2

Smoke density

EN 61034-1/2

Halogen-free

EN 50267-2-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

| TK-MULTICORE HIGH INSULATION | | | | |
|-------------------------------|----------|----------|----------|----------|
| | 2xAWG20 | 2xAWG24 | 3xAWG20 | 3xAWG24 |
| Voltage rating | 1.8/3 kV | 1.8/3 kV | 1.8/3 kV | 1.8/3 kV |
| Test voltage | 6500 V | 6500 V | 6500 V | 6500 V |
| Nominal weight | 15 kg/km | 8 kg/km | 23 kg/km | 11 kg/km |
| Nominal diameter | 3.8 mm | 2.4 mm | 4.1 mm | 2.7 mm |
| Minimum bending radius | 4xØ | 4xØ | 4xØ | 4xØ |



CONTACT

HEADQUARTER

VOLPIANO
via Brandizzo, 243
10088 Volpiano (Turin) Italy
Tel. +39 011 9951997
Fax +39 011 9953062
www.tecnikabel.com

PRODUCTION PLANTS

VOLPIANO
via Brandizzo, 243
10088 Volpiano (Turin) Italy

ALMESE
via Rivera, 100
10040 Almese (Turin) Italy

COMMERCIAL OFFICES



TECNIKABEL ROME
via Casali delle Cornacchiole, 154
00178 ROMA - ITALY



TECNIKABEL M.E. JLT
3008 Mazaya Business Avenue
Jumeirah Lake Towers
DUBAI, UAE



TECNIKABEL ASIA PTE LTD
16 Tuas South Street 2
SINGAPORE 637786



TK DEUTSCHLAND GmbH
Herdewerg 8
83623 Steingau, GERMANY

AGENT / DEALER

