




# Type DR-NBR (sealing ring)

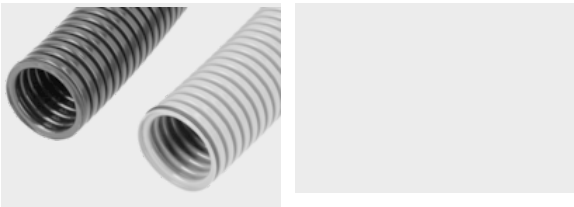

## Product information

The sealing ring DR-NBR enables the protection rating on conduit fittings MSV, KSV and WSV to be increased from IP 54 to IP 65. To do so, simply insert the sealing ring into the first recess at the end of the cable protection conduit.

To guarantee reliable installation, the clamping ring should be unlocked before the conduit is assembled. Following assembly of the cable protection conduit in the conduit fitting, protection rating IP 65 is achieved. The sealing ring can only be used for cable protection conduits with standard corrugation and crush resistance > 400 N/100 mm.

## Information, conformities and approvals



Article	Order No.	Color	Suitable for Murrflex	PU pcs.
DR-NBR M10/P7	83481410	Black	M10/P07	50
DR-NBR M12/P9	83481412	Black	M12/P09	50
DR-NBR M16/P11	83481414	Black	M16/P11	50
DR-NBR M20/P16	83481416	Black	M20/P16	50
DR-NBR M25/P21	83481418	Black	M25/P21	50
DR-NBR M32/P29	83481420	Black	M32/P29	25
DR-NBR M40/P36	83481422	Black	M40/P36	10
DR-NBR M50/P48	83481424	Black	M50/P48	10

## Material properties



Perbunan (NBR)



## Type DR-NBR (sealing ring)

### Thermal properties



Temperature / temperature range -25 °C – 120 °C

### Technical information



Halogen-free

### Conformity



RoHS (EC Directive 2011/65/EU)

### Classification



ETIM 9: EC001181  
ECLASS 14: 27430319