


FHS pivot bearing

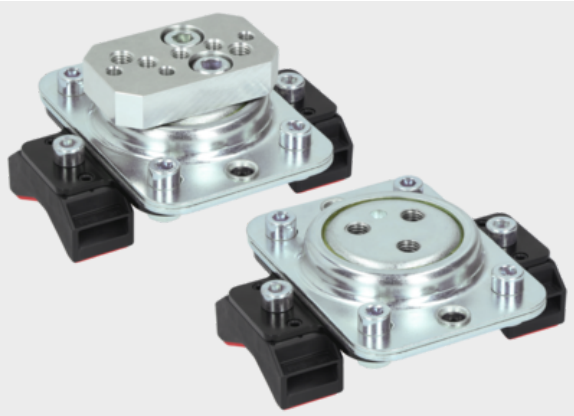

Product information

The FHS pivot bearings allow more freedom of movement for corrugated conduits. The FHS-DLM can be used to attach a trumpet (TRO 2.0 M50, NW70 and NW95) for the sliding guidance of corrugated conduits. The FHS-DZM enables the mounting of system holders, which is supplemented by a ball joint.

- Accessories:
- KMG/G - sliding channel guide
 - KMG/F - axial channel guide
 - TRO - Trumpet sliding guide

*The KKR-Fix or K KU-Fix hook-and-loop tape must be ordered separately. The FHS pivot bearings allow more freedom of movement for corrugated conduits.

Information, conformities and approvals



| Article | Order No. | PU pcs. |
|---------|-----------|---------|
| FHS-DLM | 83693450 | 1 |
| FHS-DZM | 83693451 | 1 |

Classification



ETIM 9: EC012003
ECLASS 14: 27439090
UNSPSC 26.0801: 40174500