


## EH-EMV

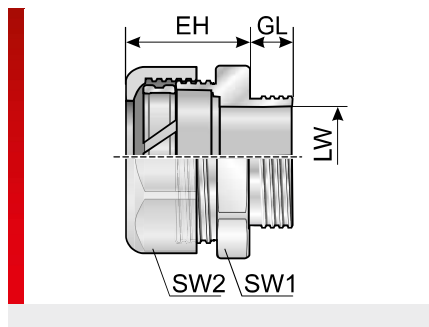

### PRODUCT INFORMATION

The EH-EMV metal fitting can be used together with the EMC cable protection conduit EW-PAP. The EH-EMV fitting is used to discharge sheath currents on the cable protection conduit safely and reliably.

### SPECIFICATIONS

- 40 – 140 °C short term 160 °C
- Nickel-plated brass
- IP 40
- RoHS

Type	Order No.	Colour	Connecting thread	Suitable for Murrflex EW	LW mm	EH mm	GL mm	SW 1 / 2 mm	Pack qty.
<b>Metric metal thread / EMC version</b>									
EH-EMV M12x1.5	83521050	Silver	M12x1.5	M12/P09	7.90	17.00	5.50	22.0	10
EH-EMV M16x1.5	83521052	Silver	M16x1,5	M16/P11	10.30	17.50	5.80	27.0	10
EH-EMV M20x1.5	83521054	Silver	M20x1.5	M20/P16	14.40	19.00	7.00	31.0	10
EH-EMV M25x1.5	83521056	Silver	M25x1.5	M25/P21	18.50	22.00	7.00	40.0	10
EH-EMV M32x1.5	83521058	Silver	M32x1.5	M32/P29	25.80	24.00	7.00	48.0	10
EH-EMV M40x1.5	83521060	Silver	M40x1.5	M40/P36	32.90	27.00	11.00	60.0	2
EH-EMV M50x1.5 <sup>1)</sup>	83521062	Silver	M50x1.5	M50/P48	41.00	31.00	11.50	78.0	2
<b>Pg metric metal thread / EMC version</b>									
EH-EMV Pg 09	83521010	Silver	Pg 09	M12/P09	12.00	17.00	6.00	22.0	10
EH-EMV Pg 11	83521012	Silver	Pg 11	M16/P11	15.50	18.00	6.00	27.0	10
EH-EMV Pg 16	83521014	Silver	Pg 16	M20/P16	18.50	20.00	7.00	31.0	10
EH-EMV Pg 21	83521016	Silver	Pg 21	M25/P21	24.00	23.00	7.00	40.0	10
EH-EMV Pg 29	83521018	Silver	Pg 29	M32/P29	33.00	26.00	7.00	48.0	10
EH-EMV Pg 36	83521020	Silver	Pg 36	M40/P36	43.00	30.00	7.50	57.0	2
EH-EMV Pg 48	83521022	Silver	Pg 48	M50/P48	54.00	32.00	11.00	78.0	2

<sup>1)</sup>Min. order quantity 100 pcs