


Terminal Strips

SK 1
 ■ 430 002
 □ 431 002

SK 2
 ■ 430 012
 □ 431 012

SK 3
 ■ 430 022
 □ 431 022

SK 4
 ■ 430 032
 □ 431 032

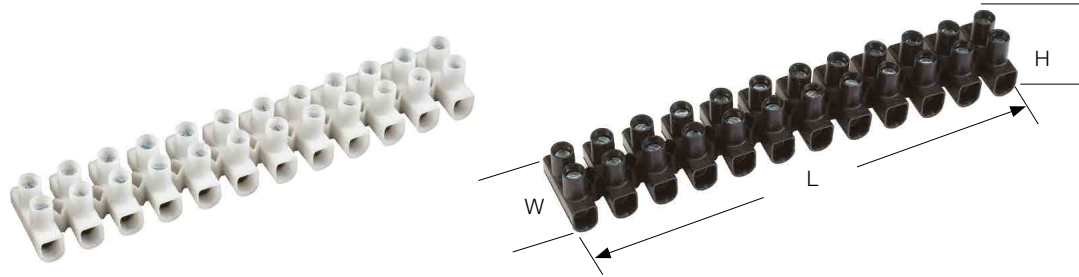

Electrical Ratings	Voltage / Current / Cross-Section	Voltage / Current / Cross-Section	Voltage / Current / Cross-Section	Voltage / Current / Cross-Section
IEC 60998-1, IEC 60998-2 (VDE)	450 V ~ / 32 A / 2,5 mm ²	450 V ~ / 41 A / 4 mm ²	450 V ~ / 57 A / 6 mm ²	450 V ~ / 32 A / 2,5 mm ²
UL	300 V ~ / 20 A / AWG 22 - 10	300 V ~ / 30 A / AWG 22 - 10	300 V ~ / 50 A / AWG 14 - 8	300 V ~ / 20 A / AWG 26 - 10
Torque	0,4 Nm	0,5 Nm	0,8 Nm	0,4 Nm
Connection Data				
Solid Strand, Screw Connection	0,75 - 4 mm ²	0,75 - 6 mm ²	1,5 - 6 mm ²	4 - 16 mm ²
Fine Strand, Screw Connection	0,5 - 2,5 mm ²	0,5 - 4 mm ²	1,5 - 6 mm ²	4 - 10 mm ²
Insulation Stripping Length / Torque	7 mm	8 mm	10 mm	10 mm
AWG Conductor	22...12	22...10	14...8	10...6
Dimensions				
L	95	116	135	176
W	16	19	22,5	25,3
H	12,8	15	17,65	20,5
Qty.				
Black (With Screw Blockage, Passivated)	50	50	50	50
Naturel (With Screw Blockage, Ni Coated)	50	50	50	50

Busbar Support Block

BM
 528 110



Dimensions	Material	Qty.
15 x 2	PA 6,6	50
15 x 3		
12 x 2		
10 x 3		
6 x 6		