


NEW CLAMP TYPE
JUNCTION BOX TERMINALS

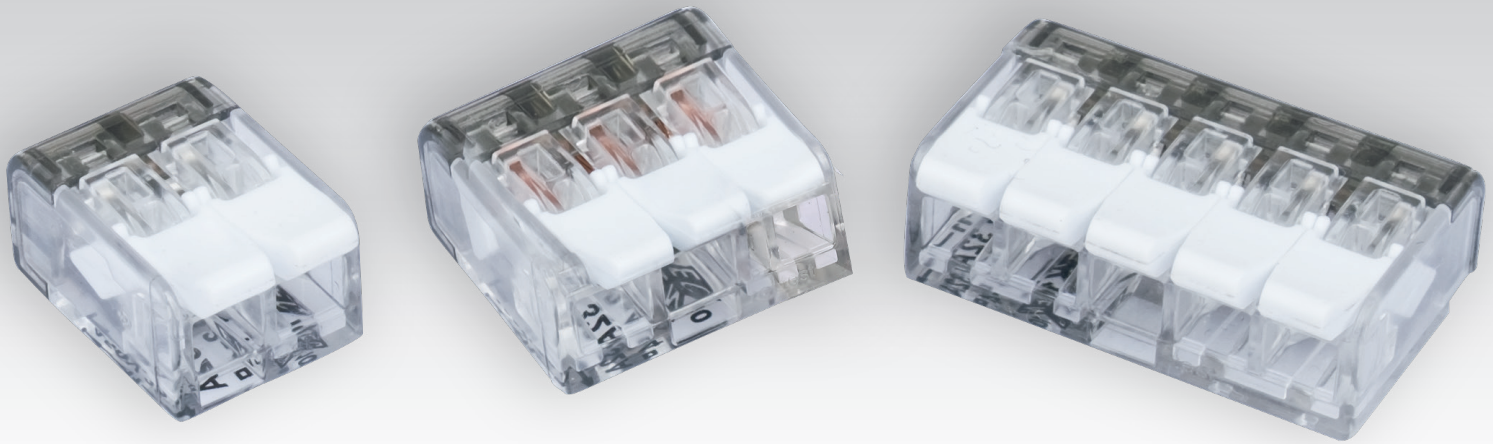


Lever Type Junction Box Terminals Suitable for All Conductors

- An innovative solution, developed for faster and safer electrical installations.
- 2, 3 and 5 connector options.
- Ergonomic structure and easy-opening levers help for rapid installations, especially for fine stranded conductors.
- No need to open the lever to install solid conductors, simply push the conductor into the terminal.
- Transparent casing provides a clear view to see the connections, test slots enable easy measurements.

Dual-side Test Slots





Properly Inserted Wire
Properly Stripped Wire

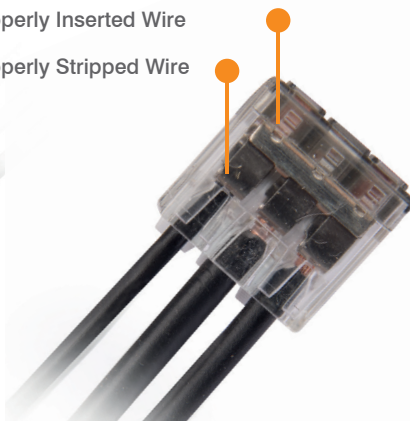







Suitable for All Conductor Types

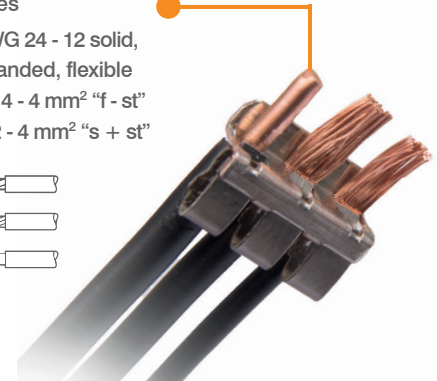- AWG 24 - 12 solid, stranded, flexible
- 0.14 - 4 mm² "f - st"
- 0.2 - 4 mm² "s + st"




Technical Specifications

AWG 24 - 12 600 V 105 °C operating temp 11mm / 0.43 in	0.14 - 4 mm ² "f - st" 0.2 - 4 mm ² "s + st" 450 V / 4 kv / 2 I _N 32A	AWG 24 - 12 600 V 105 °C operating temp 11mm / 0.43 in	0.14 - 4 mm ² "f - st" 0.2 - 4 mm ² "s + st" 450 V / 4 kv / 3 I _N 32A	AWG 24 - 12 600 V 105 °C operating temp 11mm / 0.43 in	0.14 - 4 mm ² "f - st" 0.2 - 4 mm ² "s + st" 450 V / 4 kv / 5 I _N 32A
					
2 Connector Lever Type Junction Box Terminal		3 Connector Lever Type Junction Box Terminal		5 Connector Lever Type Junction Box Terminal	
Order No.	Package Qty.	Order No.	Package Qty.	Order No.	Package Qty.
425 420	100	425 430	50	425 450	25
					




1. Nominal Current: 32 A
2. Nominal Voltage: 450 V
3. Operating Temperature: 105 °C


MOUNTING

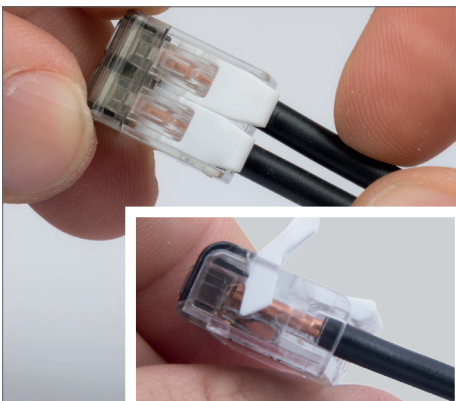

Open the lever and insert the properly stripped wire into the terminal.

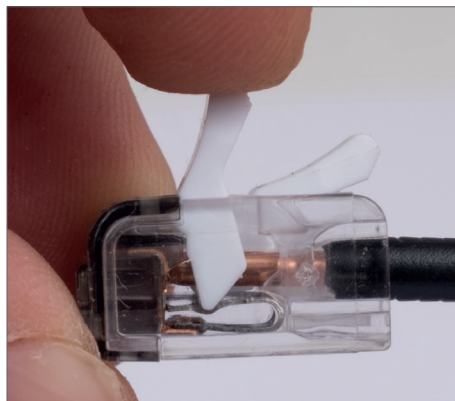

Make sure the connection is done properly by checking through the transparent casing, then close the lever.

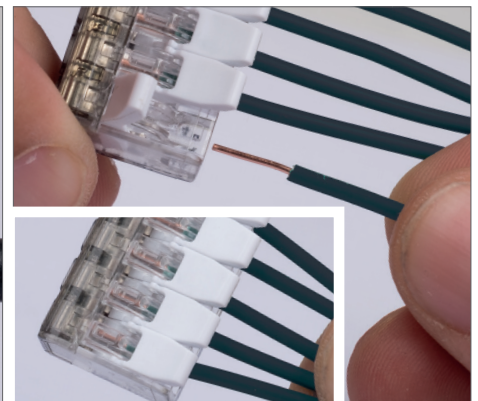

You can install solid wires without opening the lever.



Visit our **website** for detailed info !

Kızılızüm Mahallesi Kemalpaşa Kızılızüm Cad. No:15 - 35730
Kemalpaşa - İzmir / TURKEY
Tel: (+90 232) 877 08 00 - Fax: (+90 232) 877 08 06

Klemsan[®]